HSF Pb RoHS

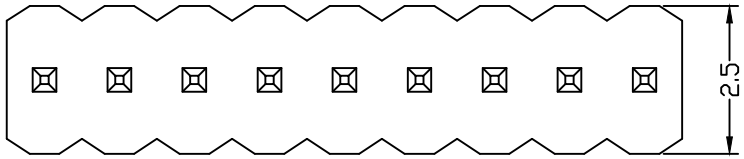

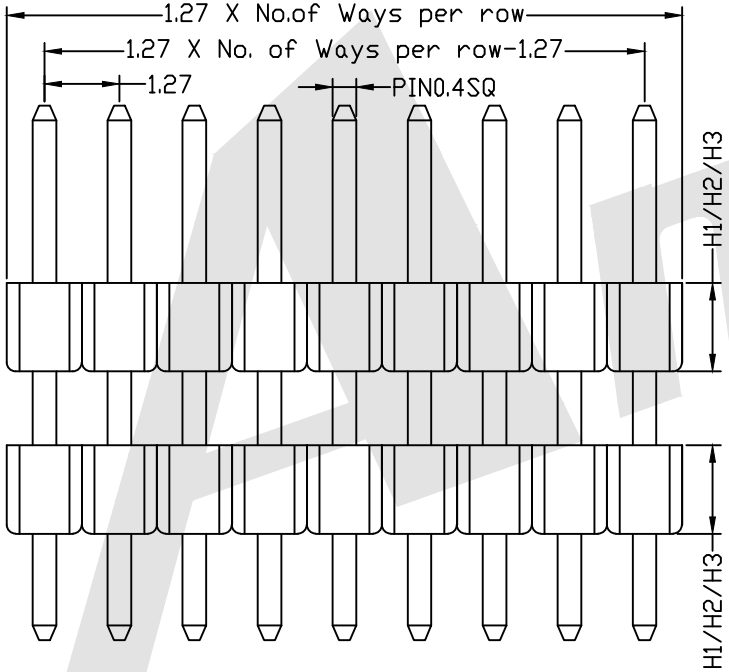

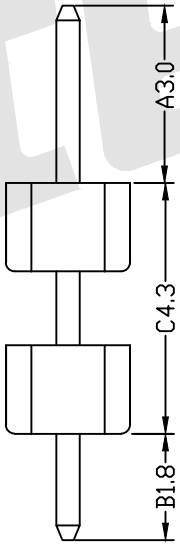

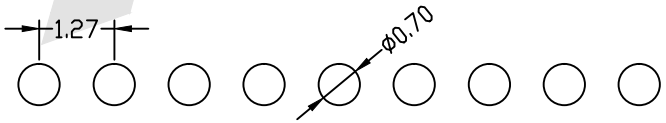

P.C.B LAYOUT

SPECIFICATIONS:

Current Rating:	1Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65° C to +125° C
Contact Material:	Brass
Insulator Material:	PA6T, UL94V-0, Black

Ordering Code:

PHCS04 - X - X - S - A-C-B - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No:

② No. of Contacts:
01 To 50

③ Contact Plating:
G0:Gold flash S0:Selective
G1:3U″ Gold S1:Selective 3u″
G2:5u″ Gold S2:Selective 5u″
G3:10u ″Gold S3:Selective 10u″
G4:15u″ Gold S4:Selective 15u″
G5:30u″ Gold S5:Selective 30u″
SN:Tin

④ Connector Type:
S:Single

⑤ Pin Length:
A: 0300=3.00mm
C: 0430=4.30mm
B: 0020=1.80mm
Please mark the desired length in the A/C/B

⑥ Insulator Material:
B:PA6T
C:LCP
E:PA9T

⑦ Packing:
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP

⑧ Plastic High:
H1:0.65mm
H2:1.5mm
H3:2.0mm

Standard IE P/N :
PHCS04-10-G0-S-0300-0430-0180-B-B-H2

A	C	B
3.0	4.3	1.8
Optional		

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown
UNIT: mm
DRAW YG ZHONG DATE 12/07/2015
CHECK BobYang DATE 12/07/2015

3rd ANGLE PROJECTION

ANTENK ELECTRONICS CO,.LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: 1.27mm Pin Header Single Row Double Plastic Straight Type

DRAWING NO: PHCS04-XXS-0300-0430-0180-XXX
PRODUCT NO: PHCS04-XXS-0300-0430-0180-XXX

REV	DESCRIPTION	DATE
	Increase packing method and material	2016/10/25