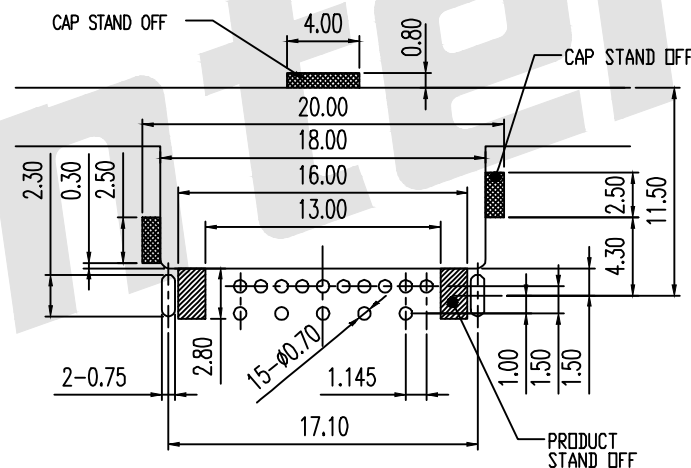
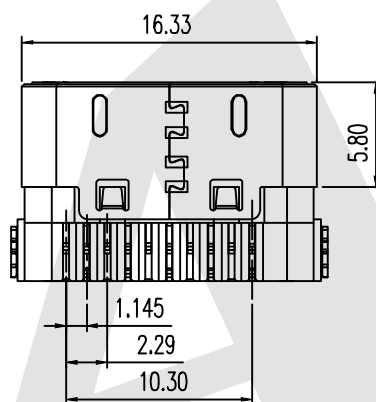
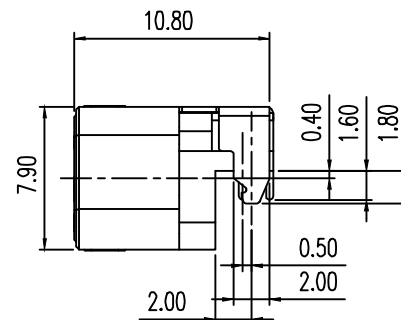
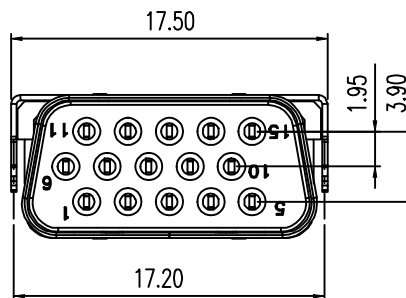


SPECIFICATION:

Insulator: Thermal Plastic UL94V-0

Contacts: Copper alloy

Shell: Steel

CONTACT PLATING:

Underplate: 50u"~150u" Nickel

Contact area: gold flash

Solder tails area: 100u" min tin (Lead free)

ELECTRICAL

Operation voltage: 250V max

Current rating: 2.5 A max

Contact resistance: 25 mohms initial

Insulation resistance: 3000 mohms min @500 VDC

Dielectric withstanding voltage: 500 VAC/Minute

Temperature range: -55°C~+85°C

Mating cycles: 500 insertions

Ordering Code:

SDR13 - 15F - X - X

① ② ③ ④

① SDR13

② Contact Type:
15F: 15pin Female

③ Color Code:
B: Black W: White
L: Blue G: Grey

④ Contact Plating

S: Selective Gold

S1: Selective 3u" Gold

S2: Selective 5u" Gold

S3: Selective 10u" Gold

S4: Selective 15u" Gold

S5: Selective 30u" Gold

G0: Gold flash

G1: 3u" Gold over

G2: 5u" Gold over

G3: 10u" Gold over

G4: 15u" Gold over

G5: 30u" Gold over

Unless Otherwise specified tolerance
X.±0.35 X.XX:±0.20
X.X:±0.25 X.XXX:±0.15

SCALE: As Shown UNIT: mm
DRAW Lv Xun Hua DATE 23/03/2019
CHECK Bob Yang DATE 23/03/2019



 ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail: sales@antenk.com

TITLE: VGA Short Body Female, Reverse
CL=0.4mm Slim Type

DRAWING NO: SDR13-15FXX

PRODUCT NO: SDR13-15FXX

REV	DESCRIPTION	DATE