


SECTION A-A

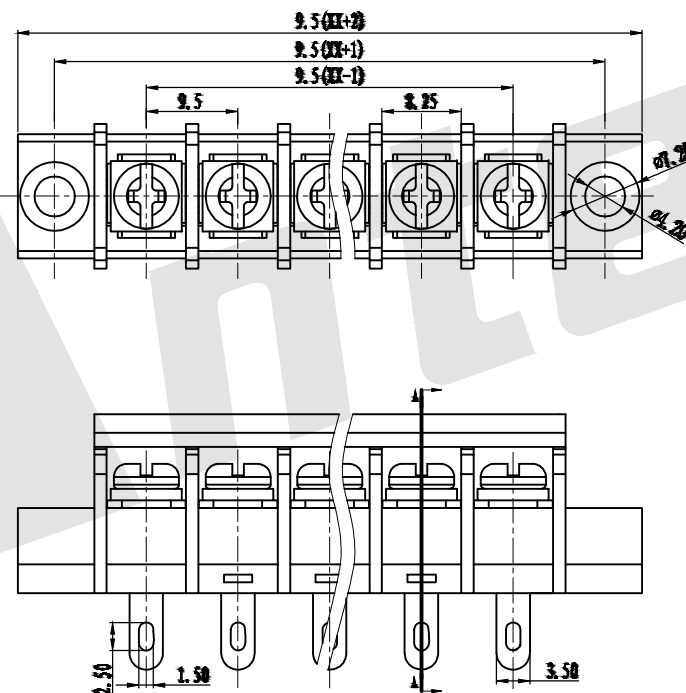

SPECIFICATION

Standard(参考标准): UL IEC
Voltage Rating (额定电压): 300V 450V
Current Rating(额定电流): 20A 24A
Wire range(使用线径): 22—12AWG 2.5mm²
Withstanding voltage(耐电压): AC2000V/1Min
Insulation resistance(绝缘电阻): 500MΩ/DC500V
Temp Rang(温度范围): -40° C ~ +105° C
Max Torque(最大锁紧力矩): 1.2Nm(10.6lb. in)
Housing(塑件): PA66, UL94V-0
Screw(螺丝): Steel, M4.0 Ni plated
Terminal(端子): Brass. 0.8t, Tin plated
Pitch(间距): 9.5mm
Poles(极数): 2P-20P

Ordering Code:

AT848 - 9.5 - XX - X -HM

Pitch:
9.5:9.5mm


Poles:

```
02: 2 Contacts
03: 3 Contacts
... ..
22: 22 Contacts
```

Insulator color:

```
A:Green  B:Blue
C:Black  G:Gray
O:Orange T:Transparent
R:Red    Y:Yellow
W:White
```

HM:
Series number

Unless Otherwise specified tolerance		 ANTENK ELECTRONICS CO., LTD Http://www.antenk.com E-mail:sales@antenk.com
X. ± 0.35 X.XX: ± 0.20 X.X: ± 0.25 X.XXX: ± 0.15		
SCALE: As Shown	UNIT: mm	TITLE: Barrier Terminal Block Pitch:9.5mm
DRAW Wu Sai	DATE 22/03/2018	
CHECK BobYang	DATE 22/03/2018	
 3rd ANGLE PROJECTION		DRAWING NO: AT848-9.5XXX-HM
		PRODUCT NO: AT848-9.5XXX-HM