

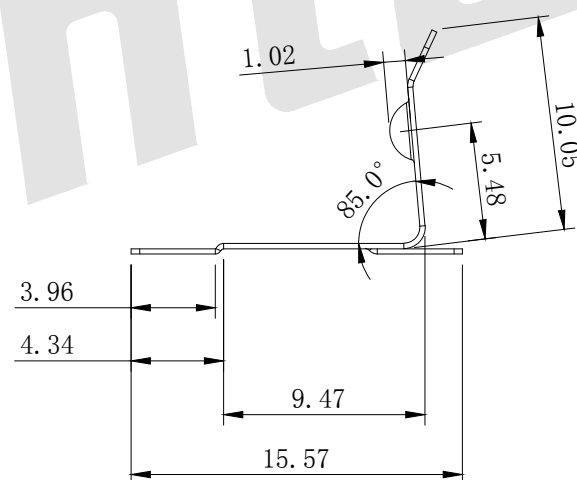
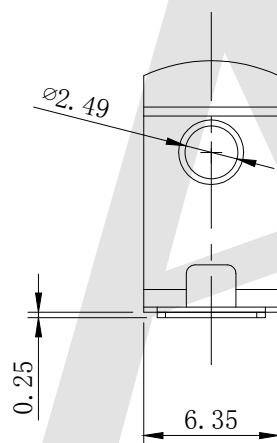


HSF

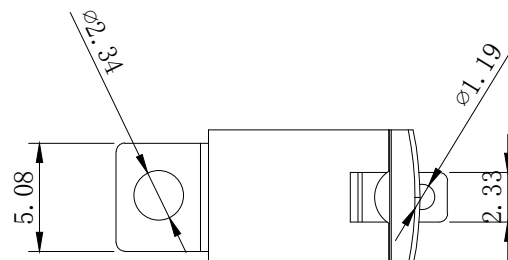

ROHS



NOTES:

1. MATERIAL: ANNEALED SPRING STEEL, T=0.25mm.
2. PLATING:
80U" Min TIN PLATED OVERALL
50U" Min NICKEL PLATED UNDER OVERALL
3. THIS PRODUCT IS SUITABLE FOR AAA BATTERY CLIP

Order Code:

BS - R - SN - X - 56
① ② ③ ④ ⑤

① BS: Battery Contacts

② Apperance for the product

M:SMT TYPE

S:180 TYPE

R:90 TYPE

④ Packing method

A: Tray packing

R: Tape & reel packing

B: Bag packing

③ Contact Plating

SI:NICKEL PLATE

SN:Tin

⑤ Product number

57:57 STYLE

G0: Gold Flash

G1: 3u" Gold

G2: 5u" Gold

G3: 10u" Gold

G4: 15u" Gold

G5: 30u" Gold

Unless Otherwise specified tolerance


X. ±0.50 X.XX: ±0.25
X.X: ±0.35 X.XXX: ±0.10

SCALE:
As Shown
DRAW
Wu Feng Rong

UNIT:
mm
DATE
28/08/2020

CHECK
BobYang

DATE
28/08/2020



3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:

Battery Holder 56 STYLE FOR AAA BATTERY

DRAWING NO: BS-R-SN-X-56

PRODUCT NO: BS-R-SN-X-56

REV

DESCRIPTION

DATE