

HSF



Technical Date
Material:
Pin(outer sleeve)Brass,machined CuZn38Pb2
Plating(outer sleeve)
Tin Plated:2m/80 μ " N,5 μ m/200 μ " Sn
Gold Pated: 2 μ m/80 μ " N, 0.8 μ " gold
Insuiator: PPS UL94V-0

Electrical:
Current rating: 3Amps/contact max.
Current resistance: ≤4mΩ/contact
Insulation resistance: ≥1000MΩ at V=100V

Operating voltage: 60VAC/DC

Mechanical:
Operating Temperature: -40° C to+105°
Soldering Temperature: +255°

Ordering Code:

MPHES - X - X - X - 07
① ② ③ ④ ⑤

① MPHES series


② Contact NO:
XX=XXpin
For example:
06=06pin

④ Packing
A:Tray B:Bag
C:Tube D:Tape Reel

⑤ Series number
07

③ Pin Plated

0: No
1: Tin 150 μ "
2: Tin 200 μ "
3: G/F
4: Gold 3 μ "
5: Gold 10 μ "
6: Gold 15 μ "
S: Special

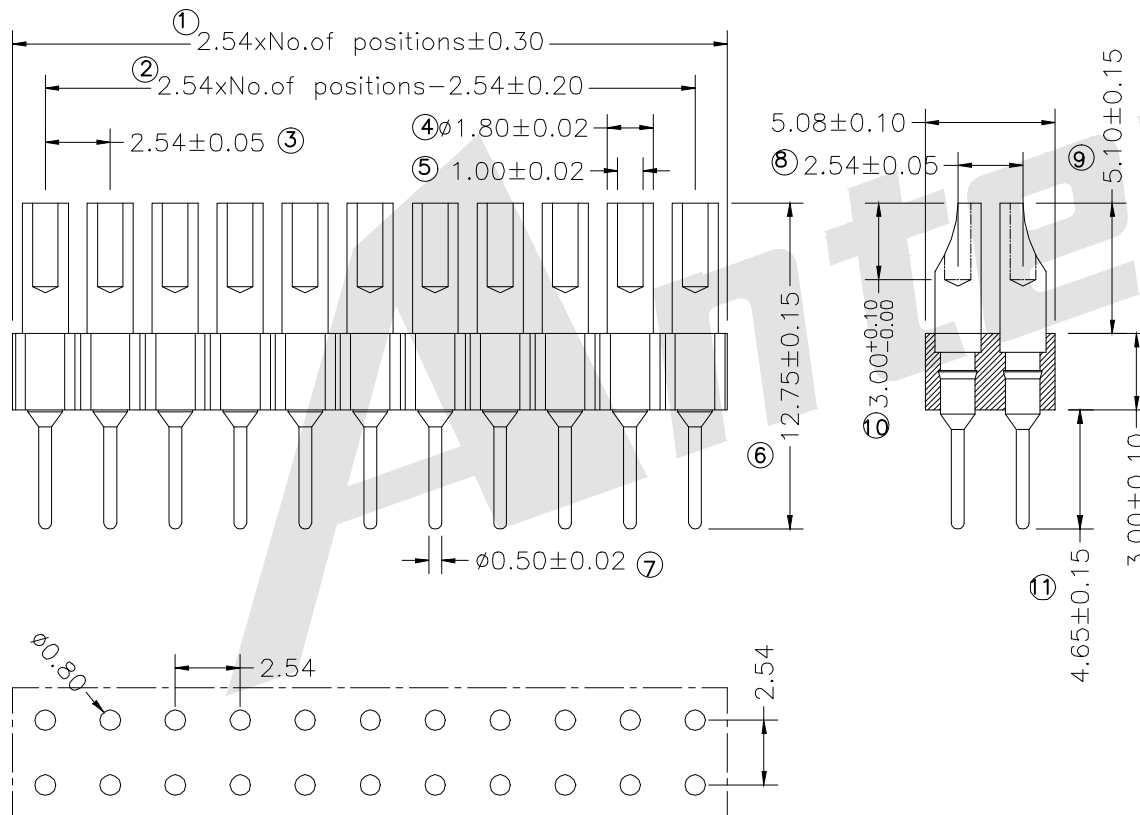

P.C.B LAYOUT

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE:
As Shown

UNIT:
mm

DRAW
Wu Sai

DATE
22/03/2018

CHECK
BobYang

DATE
22/03/2018



3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: Machined Pin connectors 2.54 mm:
MPHES series

DRAWING NO: MPHES-XXX07

PRODUCT NO: MPHES-XXX07

REV

DESCRIPTION

DATE