






HSF

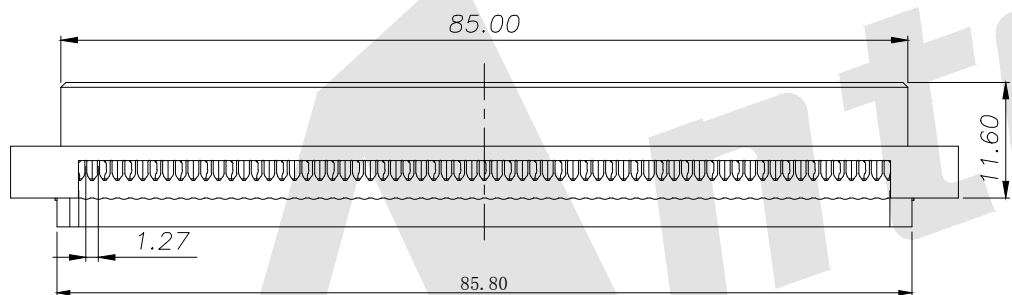

ROHS

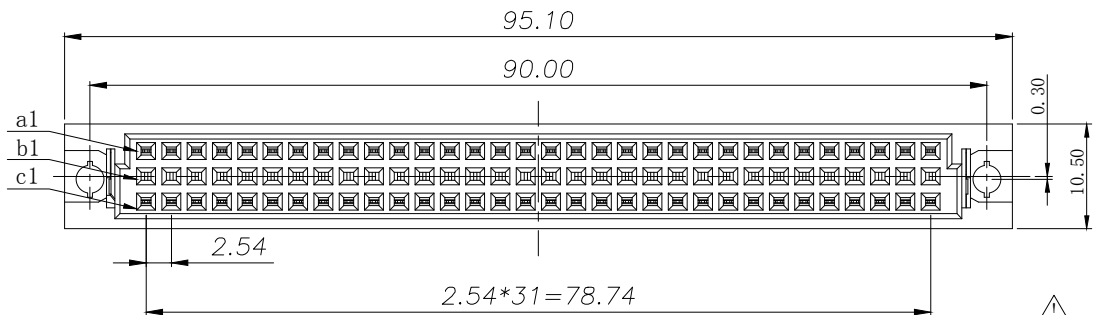

Mating Height

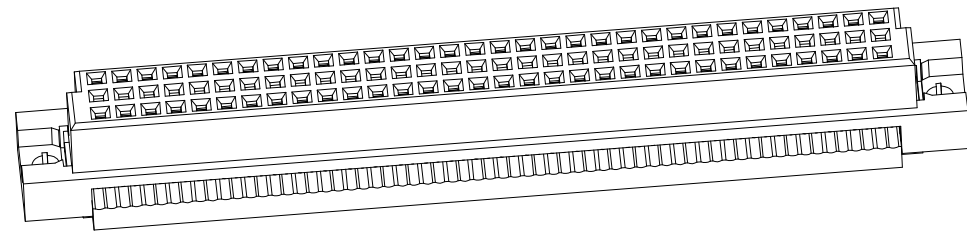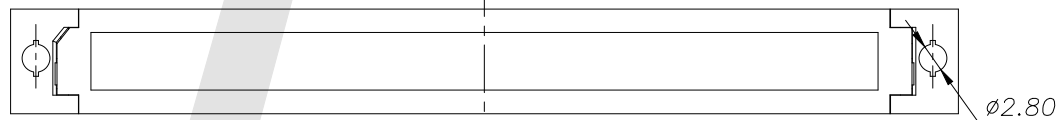

3D VIEW

**SPECIFICATION**  
 Current Rating: 3.0A  
 Insulation Resistance: 1000MΩ min.  
 Contact Resistance: 30mΩ max  
 Withstand Voltage: AC 1000V For 1 Minute  
 Operating Temperature: -55° C to +105° C  
 Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: PBT+30%GF UL 94V-0

Ordering Code:

DID - 64 - S0 - A - B - 3R  
 ① ② ③ ④ ⑤ ⑥

- ① Series No:
- ② No. of Contacts  
64:a+c 64P
- ③ Contact Plating  
G0: Gold flash  
S0: Gold flash/Ni  
G1: 3u" Gold  
S1: 3u" Gold/Ni  
G2: 5u" Gold  
S2: 5u" Gold/Ni  
G3: 10u" Gold  
S3: 10u" Gold/Ni  
G4: 15u" Gold  
S4: 15u" Gold/Ni  
G5: 30u" Gold  
S5: 30u" Gold/Ni  
SN: Tin
- ④ Insulator Material  
A:PBT  
B:PA6T  
C:LCP  
D:PA46  
E:PA9T
- ⑤ Packing  
A:Tray  
B:Bag  
T:Tube  
U:Tube+CAP  
R:Tape&Reel  
W:Tape&Reel+CAP
- ⑥ Series number  
3R

Unless Otherwise specified tolerance  
 X. ±0.35 X.XX: ±0.20  
 X.X: ±0.25 X.XXX: ±0.15

**Antenk** ANTENK ELECTRONICS CO., LTD  
 Http://www.antenk.com  
 E-mail:sales@antenk.com

REV	DESCRIPTION	DATE
	⚠ UPDATE DRAWING	04/12/2021
	⚠ ADD MATING HEIGHT	12/12/2020



TITLE:	DIN41612 Vertical Female Type 64P IDC Connectors 3Row
DRAWING NO:	DID-64-SOAB-3R
PRODUCT NO:	DID-64-SOAB-3R