
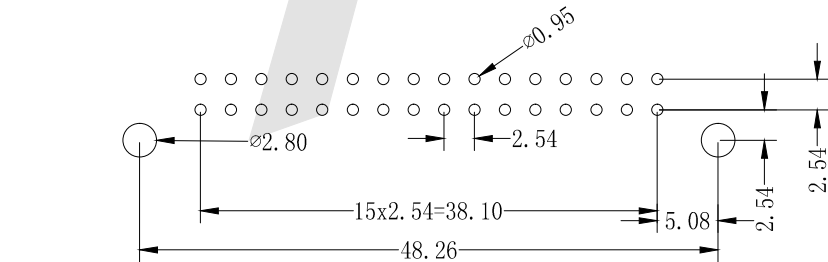
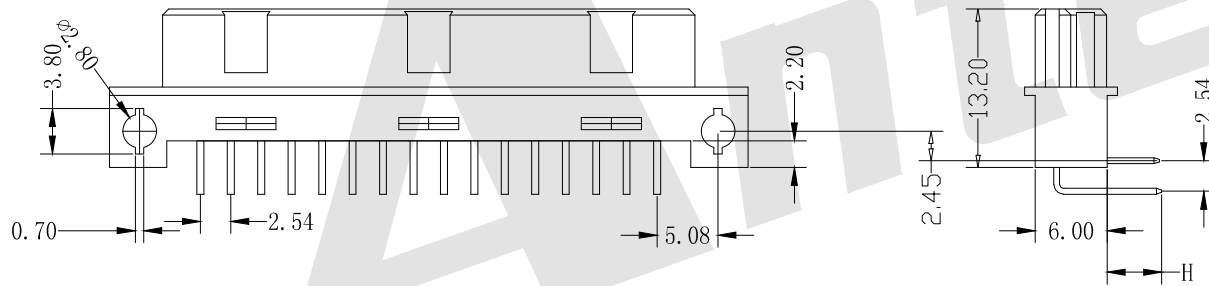


HSF

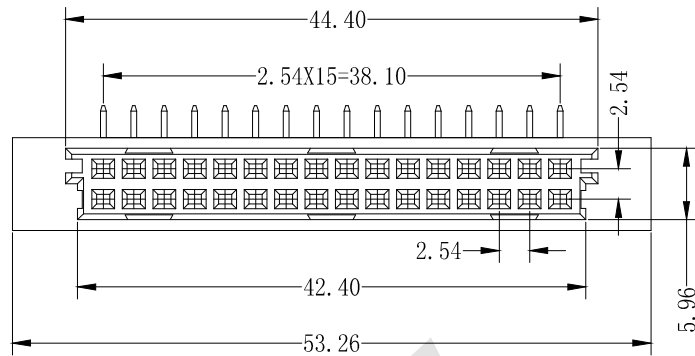

Recommended P. C. B. Layout

SPECIFICATION

Current Rating: 2.0Amp
 Insulation Resistance: 1000MΩ min.at DC 100V
 Contact Resistance: 20mΩ max
 Withstand Voltage: AC 1000V For 1 Minute
 Operating Temperature: -55° C to +105° C
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PBT+30%GF UL 94V-0
 Insertion Force: 32 pin max.30N
 Withdrawal Force: 0.15N min.per individual contact

Ordering Code:

DFR - XX - X - X - X - 210
 ① ② ③ ④ ⑤ ⑥

- ① Series No:
- ② No. of Contacts
16p 32P
- ③ Termination
B:Right tail length H=3.0mm
J:Right tail length H=7.0mm
- ④ Rows Loaded With Contacts
A:Row a
C1:Row a+b(2, 4, 6...)
C:Row a+b
- ⑤ Contact Plating
G0: Gold flash
S0: Gold flash/Ni
G1: 3u" Gold
S1: 3u" Gold/Ni
G2: 5u" Gold
S2: 5u" Gold/Ni
G3: 10u" Gold
S3: 10u" Gold/Ni
G4: 15u" Gold
S4: 15u" Gold/Ni
G5: 30u" Gold
S5: 30u" Gold/Ni
SN: Tin
- ⑥ Series number
210


Code	Number Of Contacts	Contact Arrangement	Rows With Contacts	Pitch
A	16	a	a	2.54
A1	16	a b	a b	5.08
C	32	a b	a b	2.54

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

Antenk® ANTENK ELECTRONICS CO.,LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

SCALE: As Shown	UNIT: mm
DRAW Wu Feng Rong	DATE 03/03/2021
CHECK BobYang	DATE 03/03/2021

TITLE: DIN41612 Right Angle Female Type Half Q Connectors-Inversed 32 Positions



DRAWING NO: DFR-XX-XXX-210
 PRODUCT NO: DFR-XX-XXX-210

REV	Update Drawing	03/03/2021
DESCRIPTION	DATE	