



HSF

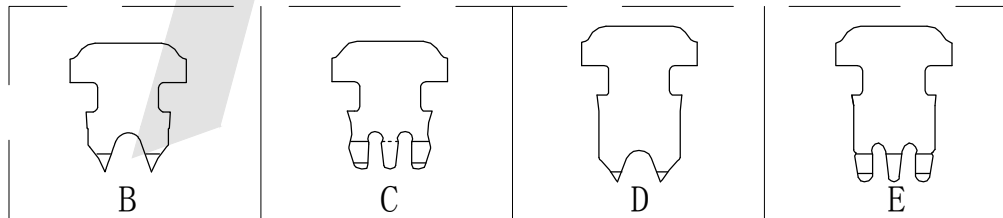

ROHS

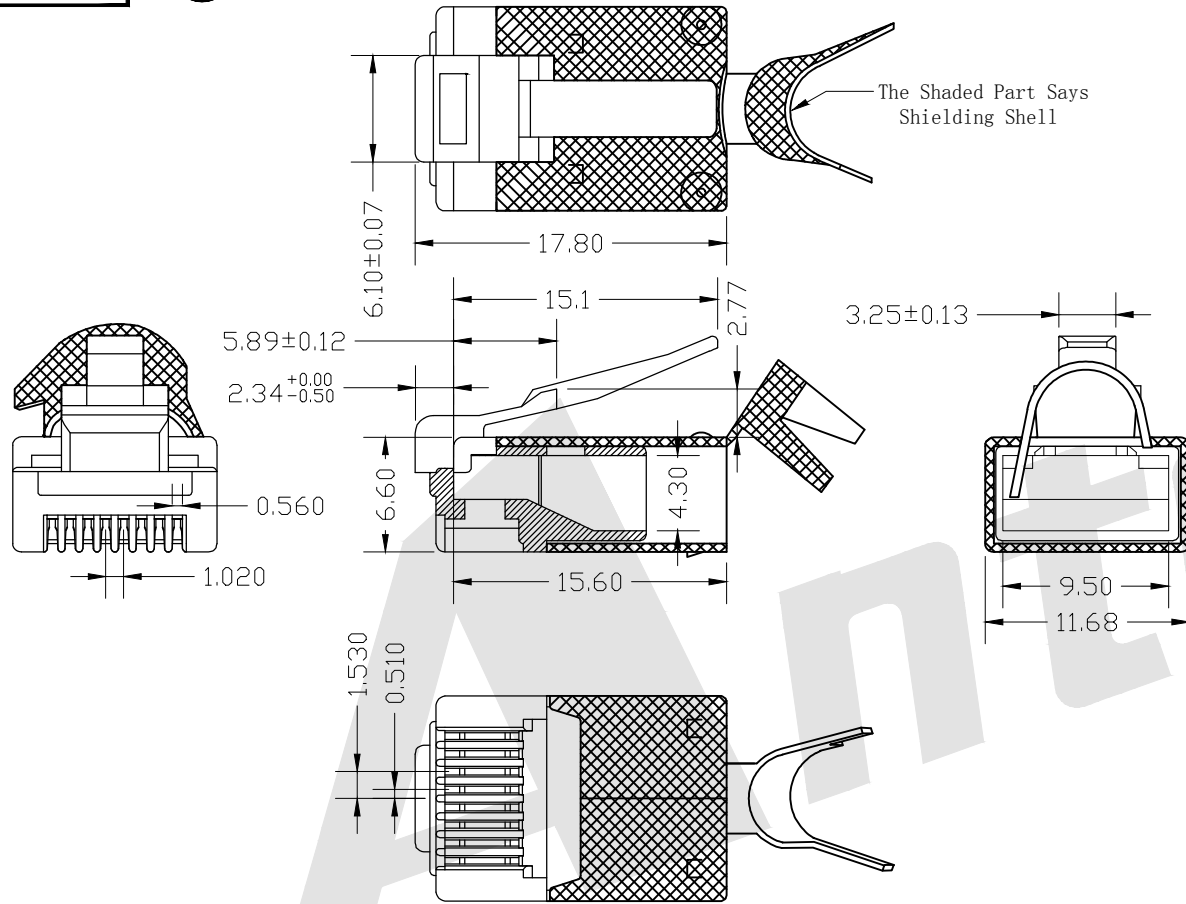

CONTACT TYPE:

SPECIFICATIONS:

- Electrical Characteristics:
 - 250V AC max at 2 Amps
 - Dielectric Withstanding: 1000V DC/Min. < 0.5A
 - Insulation Resistance: > 500MΩ, 1000V DC/Min
 - Contact Resistance: < 20MΩ
- Mechanical Characteristics:
 - Cable to Plug tensile strength: 20LBs (89N) min
 - Durability: 2000 mating cycles
- Material: PC
- Inspection For Environmental Protection
Based On The Performed Tests On Submitted Sample, The Test Results Are Compliant With The Limits Of Rohs And Reach
- Operating Temperature: -40°C - +125°C


Ordering Code:

ATRP8P8C6T - X - X - X - 003
 ① ② ③ ④ ⑤

- Series:
- Housing Material:
 - A: UL 94V-0
 - B: UL 94V-2
- Contact Type:
 - B: 2 Prongs for solid wire (SS)
 - C: 3 prongs for solid wire (S)
 - D: 2 Prongs for solid wire (SS)
 - E: 3 prongs for solid wire (S)
- Gold plating :
 - A: 1u"
 - B: 3u"
 - C: 6u"
 - D: 15u"
 - E: 30u"
 - F: 50u"
- Serial number:

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown	UNIT: mm
DRAW Wu Feng Rong	DATE 04/06/2015
CHECK BobYang	DATE 04/06/2015



Antenk® ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

TITLE: FTP/CAT6/4UP 4DOWN SHORT BODY

DRAWING NO: ATRP8P8C6T-XXX-003

PRODUCT NO: ATRP8P8C6T-XXX-003

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		