

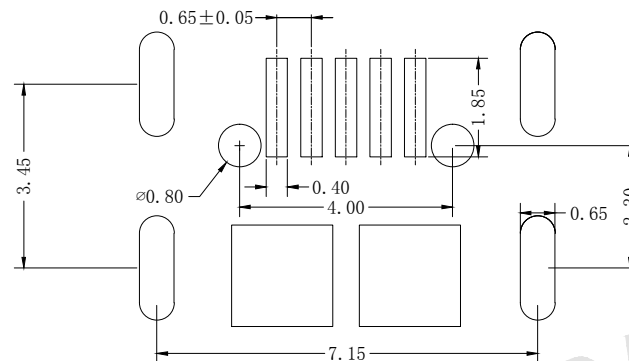
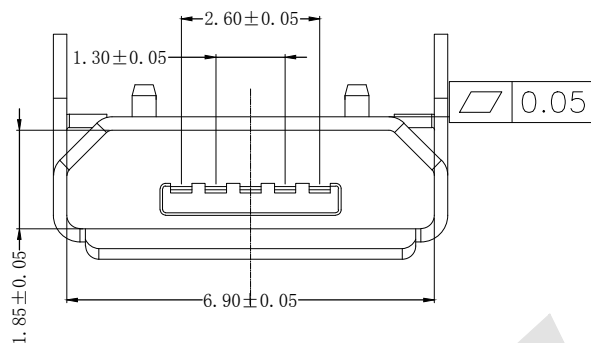
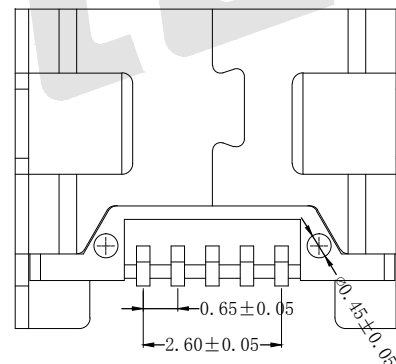
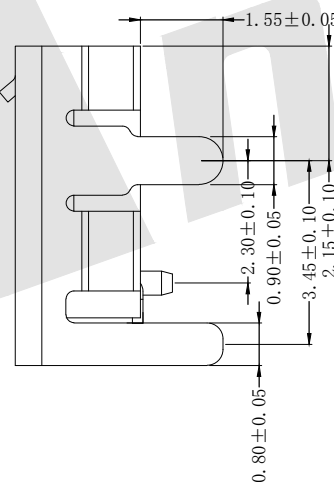


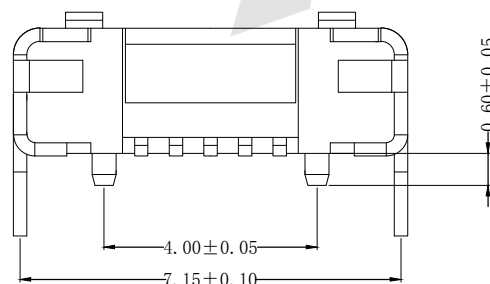

RECOMMENDED PCB LAYOUT

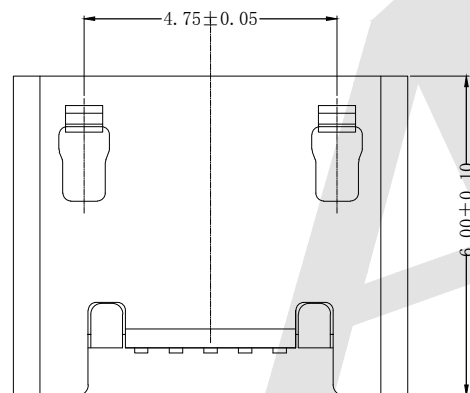

SPECIFICATIONS:

1. Electrical Characteristics:

1.1 Current Rating:

PIN 1 PIN5 3A

PIN 2 3 4 1A

1.2 Dielectric Withstanding Voltage: 250V DC

1.3 Contact Resistance: 50mΩ Max

1.4 Insulation Resistance: 100MΩ Min 250V DC

2. Material And Plating:

2.1 Housing: LCP UL94V-0

2.2 Contact: C2680R-H, 50u" Nickel Underplating Over All, 1u" Gold Plated On Contact Area

2.3 Shell: SUS, 80u" Nickel Plated

2.4 Operating Temperature: -30° C +80° C

Order code:

MUFM46 - X - X - X - X - X
① ② ③ ④ ⑤ ⑥

① Series NO:

② Shell Material:

B: Brass I: Iron

S: stainless steel

③ Insulator Material:

P: PBT+30%GF

L: LCP

④ Contact Material:

B: Brass

P: phosphor copper

⑤ Contact Plating

G0: Gold flash

G1: 3U" Gold

G2: 5U" Gold

G3: 10U" Gold

G4: 15U" Gold

G5: 30U" Gold

⑥ Packing

A: Tray

B: Bag

C: Tube

D: Tape & Reel+Cap


Unless Otherwise specified tolerance

X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm

DRAW Lv Xun Hua DATE 2019.06.03

CHECK BobYang DATE 2019.06.03



ANTENK ELECTRONICS CO., LTD

Http://www.antenk.com

E-mail: sales@antenk.com

TITLE: MUFM46-MICRO USB B TYPE FEMALE SMT 5P,
4 SHELL DIP Depth 1.55x7.15mm

DRAWING NO: MUFM46-XXXXX

PRODUCT NO: MUFM46-XXXXX

REV

DESCRIPTION

DATE