HSF Pb RoHS

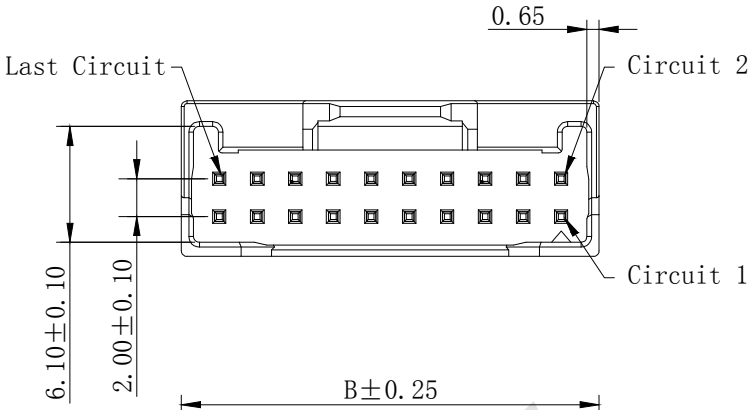



Ordering Information:

AWS2009-2*XP-***

1 2 3

1. Part NO.
3. Conor:
(Blank)-Natural
BK-Black
RD-Red
BL-Blue
YL-Yellow
OR-Orange
BR-Brown
PK-Pink
VI-Violet

SPECIFICATIONS
- Current rating: 3A AC.DC
- Voltage rating: 250V AC.DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance:1000MΩ min
- Contact Resistance: 10mΩ Max
- Temperature range: -40℃-+105℃
- Compliant with RoHs and REACH

HOUSING
- Part NO.:AWS2009-2*NP-X
- Poles: 10-40P
- Mates with: AH2009-2*NP Series Wafer
- Pin Material:Brass/Tin Over Nickel
- Material: Nylon 9T+30%GF,UL94V-0
- Color:Natural

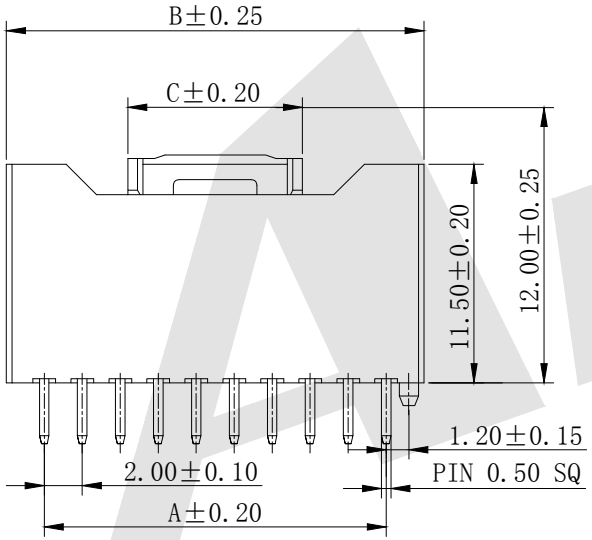

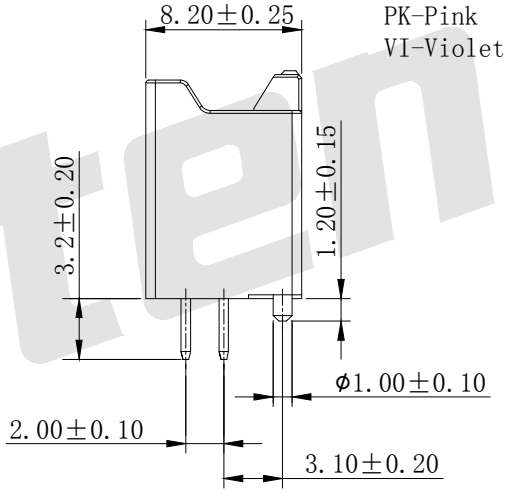

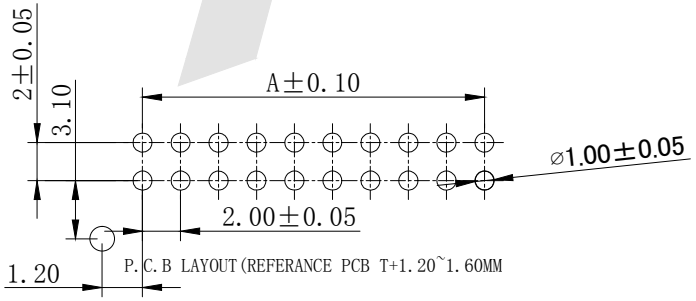

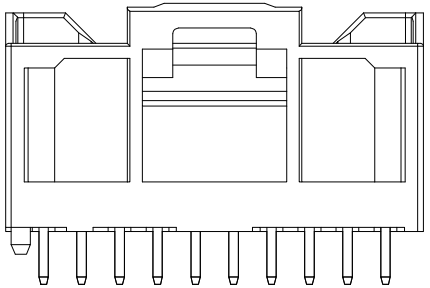

Ordering Information & Dimensions:

Circuilt	Dimensions(mm)				Circuilt	Dimensions(mm)		
	A	B	C	D		A	B	C
2*5P	8.00	12.00	10.60	7.30	2*13P	24.00	28.00	9.20
2*6P	10.00	14.00	12.60	9.20	2*14P	26.00	30.00	9.20
2*7P	12.00	16.00	14.60	9.20	2*15P	28.00	32.00	9.20
2*8P	14.00	18.00	16.60	9.20	2*16P	30.00	34.00	9.20
2*9P	16.00	20.00	18.60	9.20	2*17P	32.00	36.00	9.20
2*10P	18.00	22.00	20.60	9.20	2*18P	34.00	38.00	9.20
2*11P	20.00	24.00	22.60	9.20	2*19P	36.00	40.00	9.20
2*12P	22.00	26.00	24.60	9.20	2*20P	38.00	42.00	9.20

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown	UNIT: mm
DRAW Wu Feng Rong	DATE 05/12/2021
CHECK Bob Yang	DATE 05/12/2021

3rd ANGLE PROJECTION

Antenk® ANTENK ELECTRONICS CO,.LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: 2.00mm Pitch Straight DIP Dual Row Wafer

DRAWING NO: AWS2009-2*NP-X

PRODUCT NO: AWS2009-2*NP-X

REV	DESCRIPTION	DATE

Antenk