

HSF



ROHS

SPECIFICATION

Current Rating:	1Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65°C to +125°C
Contact Material:	Brass
Insulator Material:	PA6T UL 94V-0 Black

Ordering Code:

FHCM05 - X - X - S - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦

① Series No:


② No. of Contacts
01 To 50③ Contact Plating:
G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u "Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN: Tin④ Connector Type
S: Single⑤ Plastic High:
H: 4.3

Please mark the desired length in the H1/H2




⑥ Insulator Material

B: PA6T
C: LCP
E: PA9T

⑦ Packing

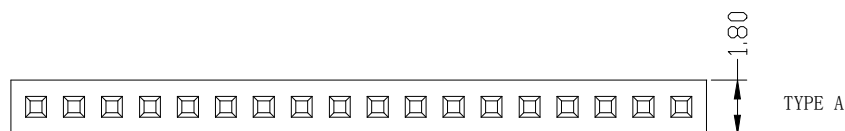A: Tray
B: Bag
T: Tube
U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP


TYPE A

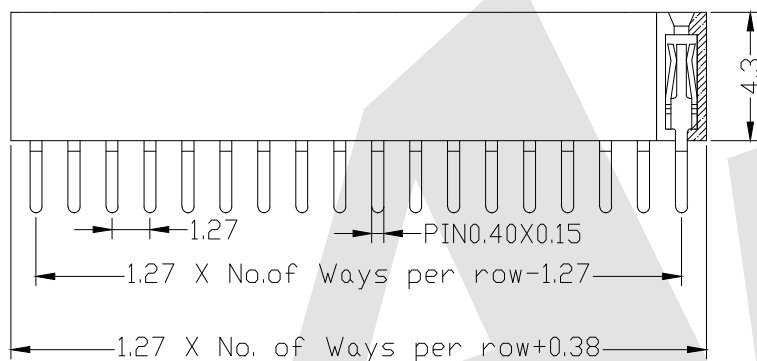

PCB LAYOUT

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
DRAW Wu Feng Rong DATE 08/05/2020
CHECK BobYang DATE 08/05/2020



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail: sales@antenk.com

TITLE:

1.27mm Female Header Single Row Angle SMT H=4.3MM

DRAWING NO: FHCM05-XXSXXXX

PRODUCT NO: FHCM05-XXSXXXX

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8