



HSF

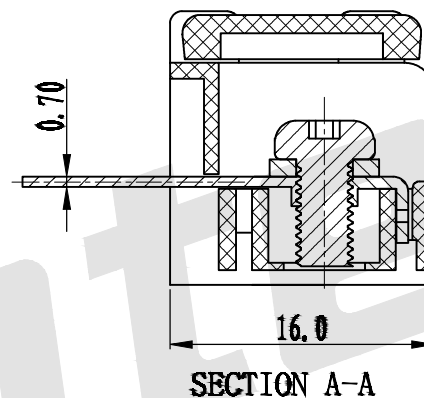

ROHS

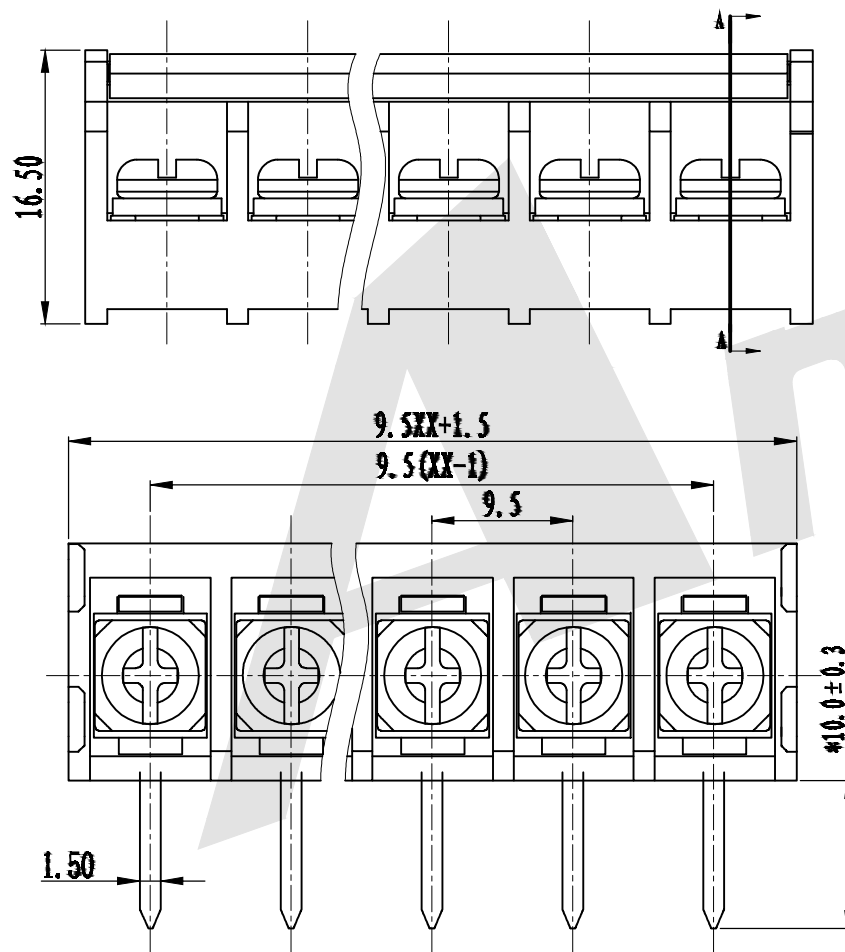

SPECIFICATION

Standard(参考标准): UL IEC
Voltage Rating (额定电压): 300V 750V
Current Rating(额定电流): 20A 32A
Wire range(使用线径): 22-12AWG 4.0mm²
Withstanding voltage(耐电压): AC2000V/1Min
Insulation resistance(绝缘电阻): 500MΩ/DC500V
Temp Rang(温度范围): -40° C ~ +105° C
Max Torque(最大锁紧力矩): 1.2Nm(10.6lb. in)
Housing(塑件): PA66, UL94V-0
Screw(螺丝): Steel, M4.0 Ni plated
Terminal(端子): Brass.0.8t,Tin plated
Pitch(间距): 9.5mm
Poles(极数): 2P-24P

Ordering Code:

AT846 - 9.5 - XX - X - GA

Pitch:
9.5:9.5mm

Poles:
02: 2 Contacts
03: 3 Contacts
... ..
22: 22 Contacts

Insulator color:
A:Green B:Blue
C:Black G:Gray
O:Orange T:Transparent
R:Red Y:Yellow
W:White

Unless Otherwise specified tolerance
X. ±0.35 X.XX:±0.20
X.X:±0.25 X.XXX:±0.15

SCALE: As Shown UNIT: mm
DRAW Wu Sai DATE 22/03/2018
CHECK BobYang DATE 22/03/2018



ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
Barrier Terminal Block Pitch:9.5mm

DRAWING NO: AT846-9.5XXX-GA
PRODUCT NO: AT846-9.5XXX-GA

REV

DESCRIPTION

DATE