

HSF



SPECIFICATION

Current Rating:7 Amp
Insulation Resistance:1000M ohms min
Contact Resistance:20M ohms max
Dielectric Withstanding:AC500V
Operating Temperature:-65° C to +125° C
Contact Material:Brass
Insulator Material:LCP, UL 94V-0 Black

Ordering Code:

PHIS01 - X - X - S - A-B - X - X
① ② ③ ④ ⑤ ⑥ ⑦


- ① Series No:
② No. of Contacts
02 To 40
③ Contact Plating:
G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin
④ Connector Type
D:Double
⑤ Pin Length:
A:1150=11.50mm
B:0320=3.20mm
Please mark the desired
length in the A/B
⑥ Insulator Material
B:PA6T
C:LCP
E:PA9T
⑦ Packing:
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP

Standard IE P/N :

PHIS01-16-G0-D-0964-0300-B-B

A	B	Unless Otherwise specified tolerance	
9.64	3.00	X. ±0.35	X.XX: ±0.20
		X.X: ±0.25	X.XXX: ±0.15

Optional	SCALE: As Shown	UNIT: mm
	DRAW Wu Feng Rong	DATE 23/09/2019
	CHECK BobYang	DATE 23/09/2019







ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
3.0 Pin Header DUAL ROW STRAIGHT TYPE

DRAWING NO: PHIS01-XXS-A-B-XX

PRODUCT NO: PHIS01-XXS-A-B-XX

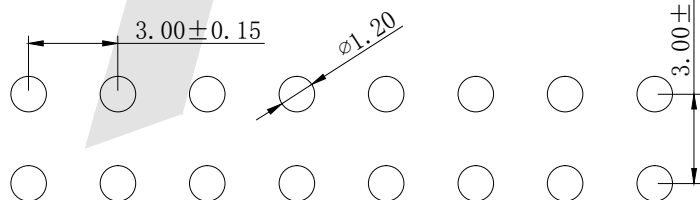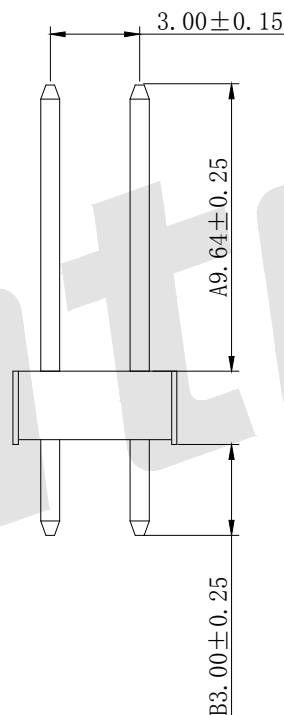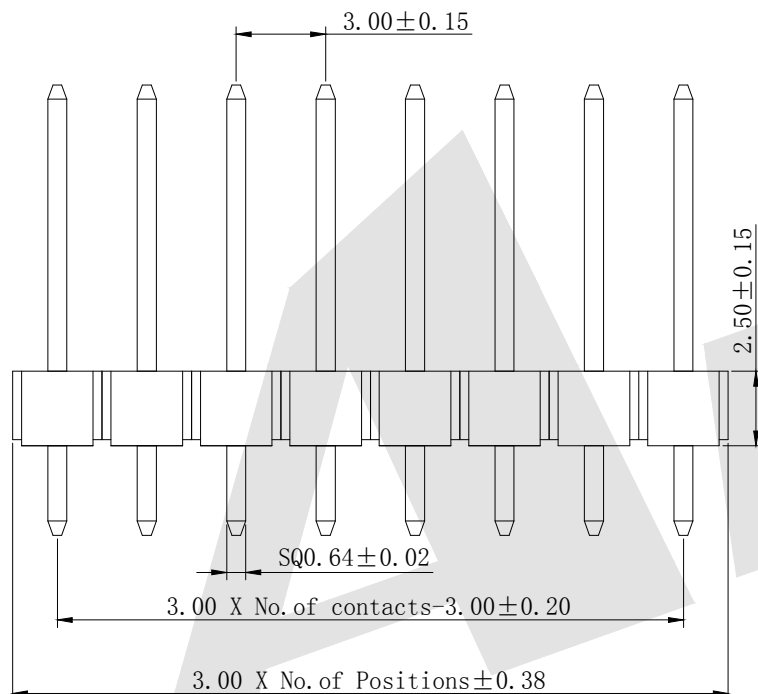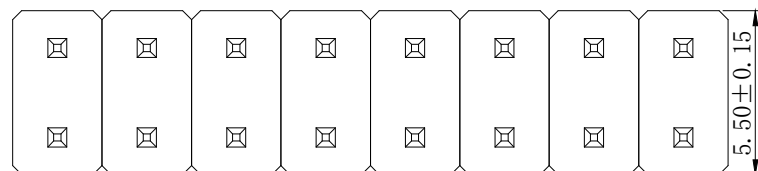

Increase packing method and material

2016/10/25

REV

DESCRIPTION

DATE