

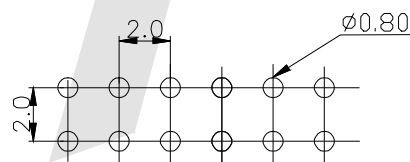


HSF

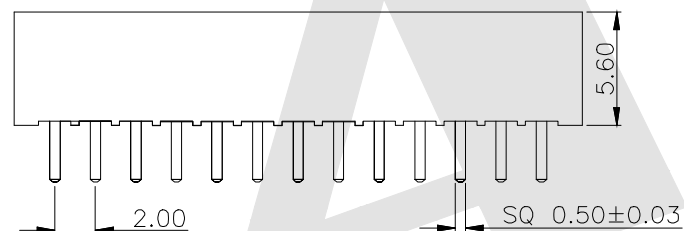


ROHS

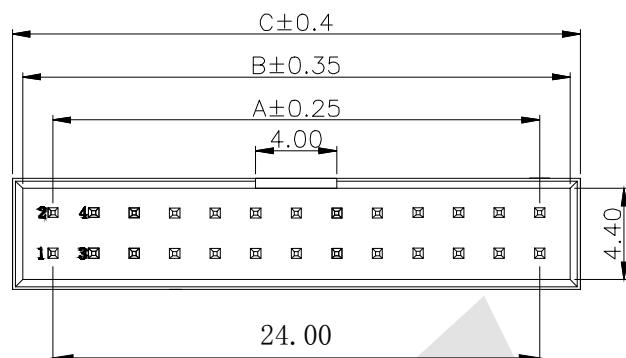

PCB Hole Layout

PIN NUMBER	A(mm)	B(mm)	C(mm)
10PIN	8.00	10.80	12.00
12PIN	10.00	12.80	14.00
14PIN	12.00	14.80	16.00
16PIN	14.00	16.80	18.00
18PIN	16.00	18.80	20.00
20PIN	18.00	20.80	22.00
24PIN	22.00	24.80	26.00
26PIN	24.00	26.80	28.00
30PIN	28.00	30.80	32.00
34PIN	32.00	34.80	36.00
40PIN	38.00	40.80	42.00
44PIN	42.00	44.80	46.00



SPECIFICATION

Current Rating: 2.0 Amp
Insulation Resistance: 1000MΩ min
Contact Resistance: 20mΩ max
Withstand Voltage: 500V AC/DC
Operating Temperature: -40° C to +105° C
Contact Material: Copper Alloy
Contact Plating: Gold Flash All Over
Insulator Material: PA6T Black UL 94V-0

Ordering Code:

BHCS07 - X - X - X - X - X
① ② ③ ④ ⑤ ⑥

- ① Series No:
② No. of Contacts
10 12 14 16 18
20 24 26
30 34 40 44
③ Contact Plating:
G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin
④ Color Insulator
B:Black
U:Blue
W:White
⑤ Insulator Material
B:PA6T
C:LCP
E:PA9T
⑥ Packing
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE:
As Shown
UNIT:
mm
DRAW
Wu Feng Rong
DATE
12/07/2020
CHECK
BobYang
DATE
12/07/2020



3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
2.00mm Box Header Short Body 180° H=5.6MM

DRAWING NO: BHCS07-XXXX

PRODUCT NO: BHCS07-XXXX

REV

DESCRIPTION

DATE