

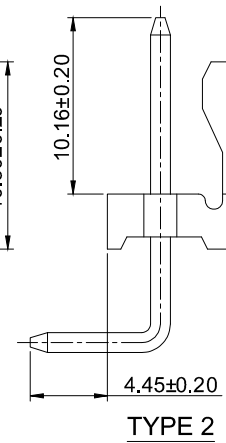
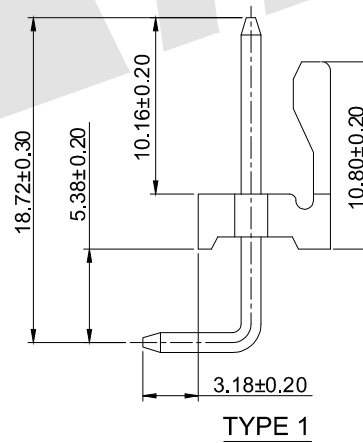
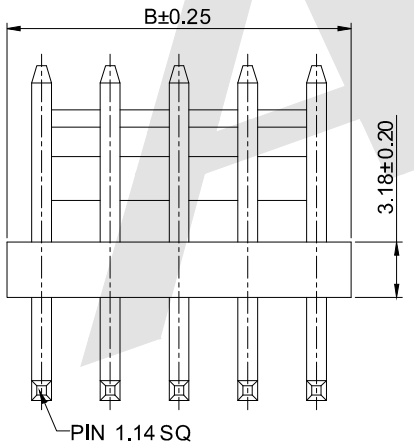



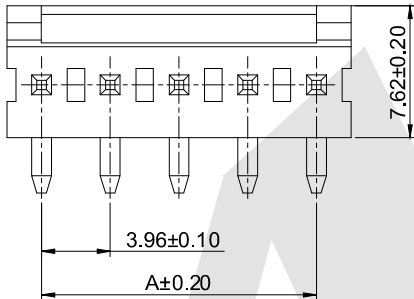

Ordering Information:
DW3961R-XP-2 - *
1 2

1.Part No.
2.Type:
(Blank): TYPE 1
H:TYPE 2



SPECIFICATIONS

- Voltage rating: 250V AC,DC
- Current rating: 7A AC,DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: $1000 \text{ M}\Omega$ min
- Temperature range: $-40^\circ\text{C} \sim +105^\circ\text{C}$

WAFER

- Part NO: DW3961R-XP-2
- Material: Pin: Brass/Tin over Nickel
Insulator: Nylon 66, UL94V-0
- Mates with: DH3961 series Housing
- Color: Natual


Ordering Information & Dimensions:

PART NO.	Dimensions	
	A	B
DW3961R-2P-2	3.96	7.92
DW3961R-3P-2	7.92	11.88
DW3961R-4P-2	11.88	15.84
DW3961R-5P-2	15.84	19.80
DW3961R-6P-2	19.80	23.76
DW3961R-7P-2	23.76	27.72
DW3961R-8P-2	27.72	31.68
DW3961R-9P-2	31.68	35.64
DW3961R-10P-2	35.64	39.60
DW3961R-11P-2	39.60	43.56
DW3961R-12P-2	43.56	47.52
DW3961R-13P-2	47.52	51.48
DW3961R-14P-2	51.48	55.44
DW3961R-15P-2	55.44	59.40
DW3961R-16P-2	59.40	63.36
DW3961R-17P-2	63.36	67.32
DW3961R-18P-2	67.32	71.28
DW3961R-19P-2	71.28	75.24
DW3961R-20P-2	75.24	79.20
DW3961R-21P-2	79.20	83.16
DW3961R-22P-2	83.16	87.12
DW3961R-23P-2	87.12	91.08
DW3961R-24P-2	91.08	95.04

Unit: mm

Unless Otherwise specified tolerance
X. ± 0.35 X.XX: ± 0.20
X.X: ± 0.25 X.XXX: ± 0.15

SCALE: As Shown UNIT: mm
DRAW: Jack Bao DATE: 7/12/2018
CHECK: Bob Yang DATE: 7/12/2018



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: 3.96mm pitch 90° Wafer Connector Series

DRAWING NO: DW3961R-XP-2

PRODUCT NO: DW3961R-XP-2

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		