

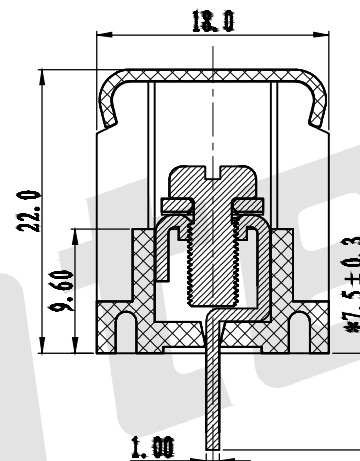


HSF

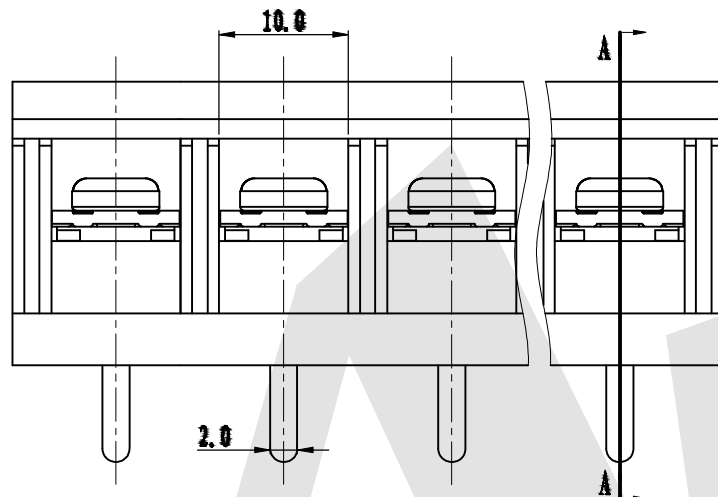

SECTION A-A

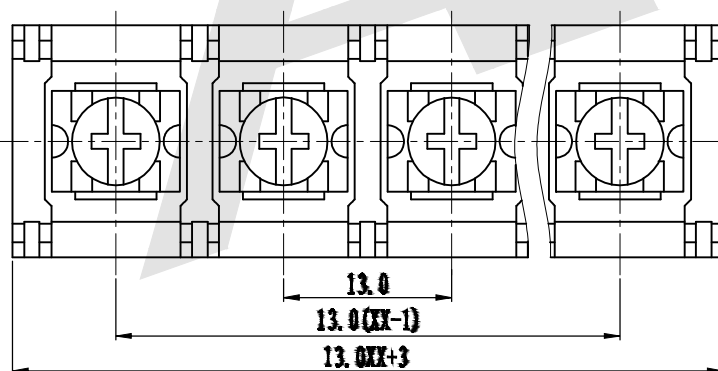

SPECIFICATION

Standard(参考标准): UL IEC
Voltage Rating (额定电压): 600V 750V
Current Rating(额定电流): 40A 41A
Wire range(使用线径): 18—10AWG 6.0mm²
Withstanding voltage(耐电压): AC2000V/1Min
Insulation resistance(绝缘电阻): 500MΩ/DC500V
Temp Rang(温度范围): -40° C ~ +105° C
Max Torque(最大锁紧力矩): 1.2Nm(10.6lb. in)
Housing(塑件): PA66, UL94V-0
Screw(螺丝): Steel, M4.0 Ni plated
Terminal(端子): Brass. 1.0t, Tin plated
Pitch(间距): 13.0mm
Poles(极数): 2P-24P

Ordering Code:

AT878 - 13.0 - XX - X - C

Pitch:
13.0:13.0mm

Poles:

02: 2 Contacts
03: 3 Contacts
... ..
22: 22 Contacts


Insulator color:

A:Green B:Blue
C:Black G:Gray
0:Orange T:Transparent
R:Red Y:Yellow
W:White

C:Series number

Unless Otherwise specified tolerance
X. ±0.35 X.XX:±0.20
X.X:±0.25 X.XXX:±0.15

SCALE: As Shown UNIT: mm
DRAW Wu Sai DATE 22/03/2018
CHECK BobYang DATE 22/03/2018



ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
Barrier Terminal Block Pitch:13.0mm

DRAWING NO: AT878-13.0XXX-C

PRODUCT NO: AT878-13.0XXX-C

REV

DESCRIPTION

DATE