

HSF







SPECIFICATION

Current Rating: 1Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65° C to +125° C
 Contact Material: Brass
 Insulator Material: PA6T, UL 94V-0 Black

Ordering Code:

PHCR11 - X - X - D - A-D-B - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts: 02 To 100
- ③ Contact Plating:
 G0: Gold flash S0: Selective
 G1: 3u" Gold S1: Selective 3u"
 G2: 5u" Gold S2: Selective 5u"
 G3: 10u" Gold S3: Selective 10u"
 G4: 15u" Gold S4: Selective 15u"
 G5: 30u" Gold S5: Selective 30u"
 SN: Tin
- ④ Connector Type:
 D: Dual
- ⑤ Pin Length:
 A: 0300=3.00mm
 D: 0100=1.00mm
 B: 0180=1.80mm
 Please mark the desired length in the A/D/B
- ⑥ Insulator Material:
 B: PA6T
 C: LCP
 E: PA9T
- ⑦ Packing:
 A: Tray
 B: Bag
 T: Tube
 U: Tube+CAP
 R: Tape&Reel
 W: Tape&Reel+CAP

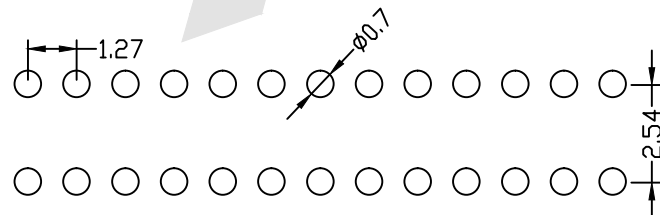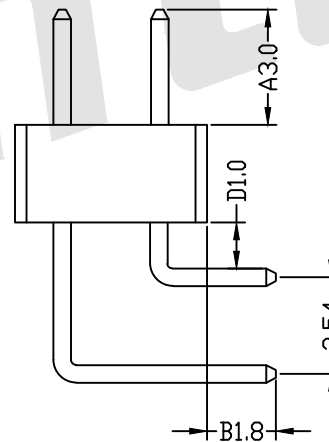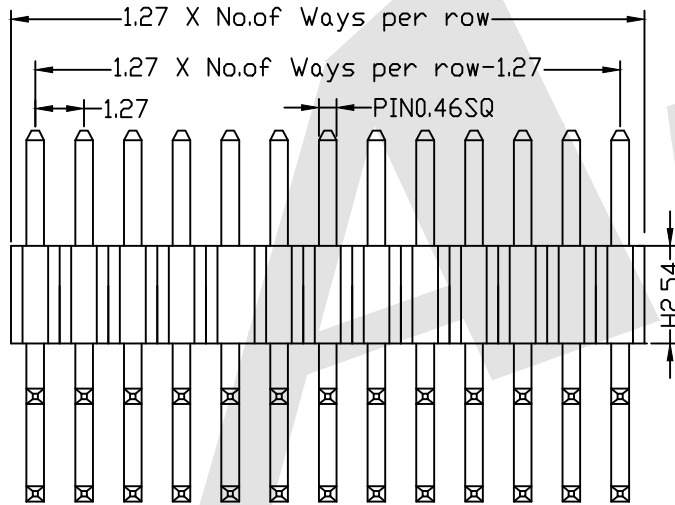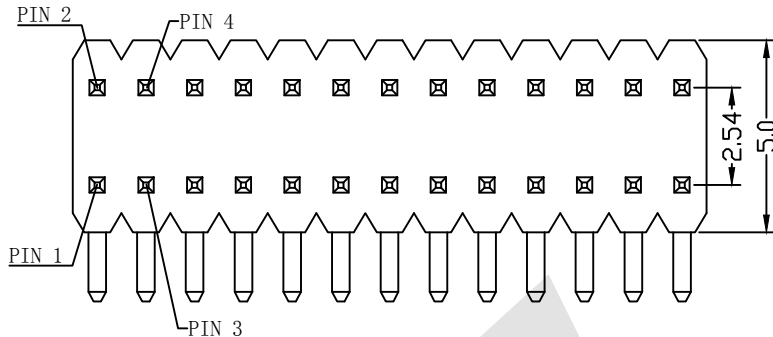


Standard IE P/N :

PHCR11-10 - G0 - D - 0300-0100-0180 - B - B

| | | | | |
|----------|-----|-------|--------------------------------------|--------------|
| A | D | B | Unless Otherwise specified tolerance | |
| 3.0 | 1.0 | 1.8 | X. ±0.35 | X.XX: ±0.20 |
| | | | X.X: ±0.25 | X.XXX: ±0.15 |
| SCALE: | | UNIT: | | |
| As Shown | | mm | | |

Antenk ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

| | | |
|-----|--------------------------------------|------------|
| REV | Increase packing method and material | 2016/10/25 |
| | DESCRIPTION | DATE |



| | |
|-------------|---|
| TITLE: | 1.27X2.54mm Pin Header Angle Type Dual Row |
| DRAWING NO: | PHCR11-XXD-0300-0100-0180 - XX |
| PRODUCT NO: | PHCR11-XXD-0300-0100-0180 - XX |