
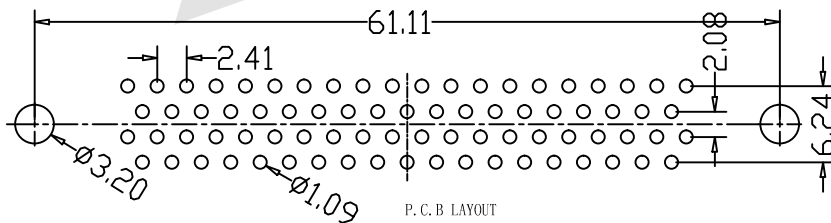
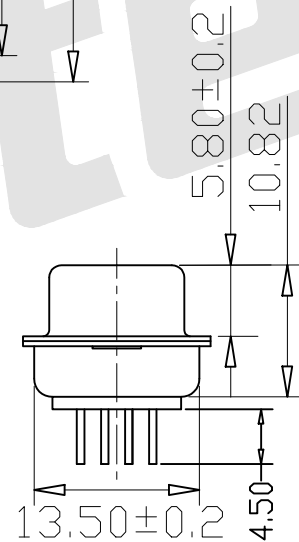
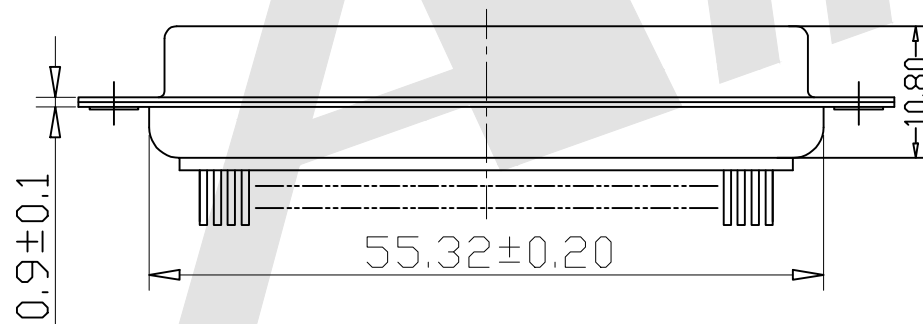


HSF

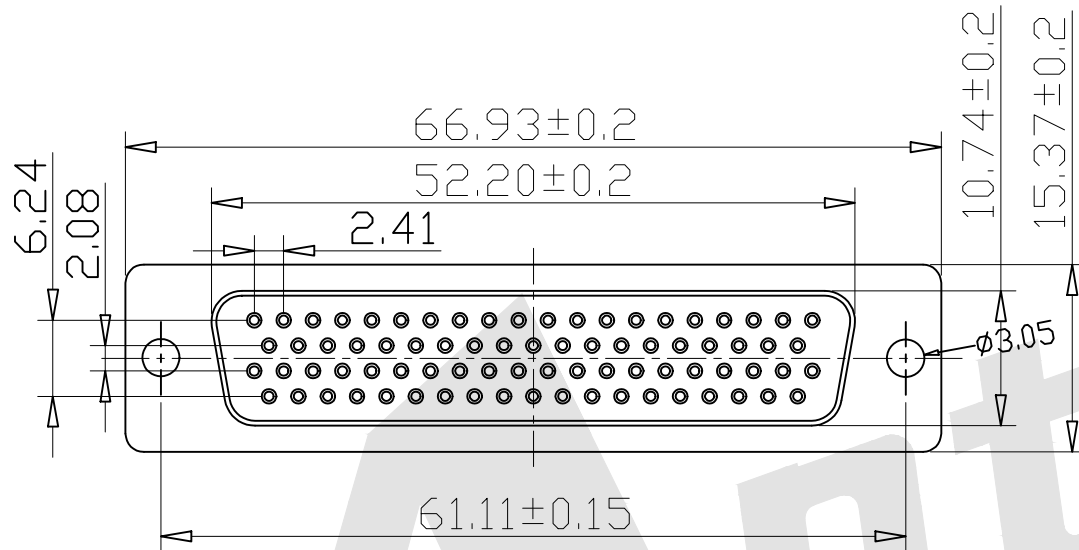

P. C. B LAYOUT

Material:

Housing: Temperature Thermoplastics, PBT+G. F UL 94V-0

Contact: Brass or Bronze

Shell: 0.35T Steel Nickel Plating All Area

Electical Characteristics:

Current Rating: 5A

Contact Resistance: 20 milliohms Max

Withstanding Voltage: 500V AC For 1 Minute

Insulation Resistance: 1000 Megohms Min

Operating Temperature: -55° C to +105° C

Ordering Code:

HDP02 - F - 78 - A - 0 - B - S

① ② ③ ④ ⑤ ⑥ ⑦

① Four Row Straight DIP (Pitch=2.41mm)

② Contact Type:

F:Female

③ Contact NO.:

78=78pin

④ Mounting Option:

A: No accessories

B: Rear Rivet

C: Front Rivet

D: Groudstand-off on real shell

E: Front rivet+Groundstand-off on real shell

⑤ Accessories:

O:Non Accessories

A: Zinc alloy 4.8mm Nickel

Al:Zinc alloy 5.8mm Nickel

B: Iron 4.8mm Nickel

Bl:Iron 5.8mm Nickel

C: Copper alloy 4.8mm Nickel

Cl:Copper alloy 5.8mm Nickel

D: Copper screw 4.8mm Nickel

Dl:Copper screw 5.8mm Nickel

⑥ Color Code:

W:White L:Blue

B:Black G:Grey

⑦ Contact Plating

S:Selective Gold

S1:Selective 3u" Gold

S2:Selective 5u" Gold

S3:Selective 10u" Gold

S4:Selective 15u" Gold

S5:Selective30u" Gold

G0: Gold flash


G1: 3u" Gold over

G2: 5u" Gold over

G3: 10u" Gold over

G4: 15u" Gold over

G5: 30u" Gold over

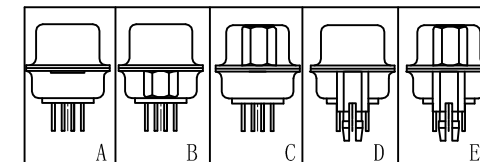

Unless Otherwise specified tolerance

X. ±0.35 X.XX: ±0.20

X.X: ±0.25 X.XXX: ±0.15

SCALE:

As Shown

UNIT:

mm

DRAW

Lv Xun Hua

DATE

20/03/2019

CHECK

BobYang

DATE

20/03/2019



ANTENK ELECTRONICS CO., LTD

Http://www.antenk.com

E-mail:sales@antenk.com

TITLE:

D-SUB PCB Female Four Row 78

Pin(Pitch=2.41mm)Straight (stamped Pin)

DRAWING NO:

HDP02-F78XXXX

PRODUCT NO:

HDP02-F78XXXX



3rd ANGLE PROJECTION

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8