

Ordering Code:

ECDF02 - X - X - X - X - X
① ② ③ ④ ⑤ ⑥

① Series No:

④ Color Insulator

B:Black

U:Blue

G:Grey

② No. of Contacts

10P 34P

14P 40P

16P 50P

20P 60P

26P 64P

⑤ Packing

A:Tray

B:Bag

C:Tube

③ Contact Plating

G0: Gold flash

G1: 3u" Gold

G2: 5u" Gold

G3: 10u" Gold

G4: 15u" Gold

G5: 30u" Gold

SN: Tin

S0: Gold flash/Ni

S1: 3u" Gold/Ni

S2: 5u" Gold/Ni

S3: 10u" Gold/Ni




S4: 15u" Gold/Ni

S5: 30u" Gold/Ni

⑥ SPECIAL FUNCTION

A:With Clapboard

B:Without Clapboard

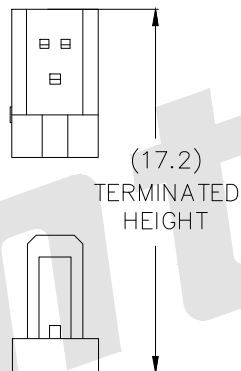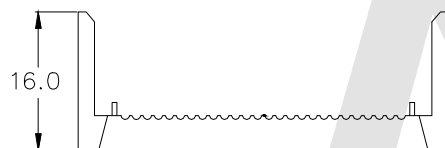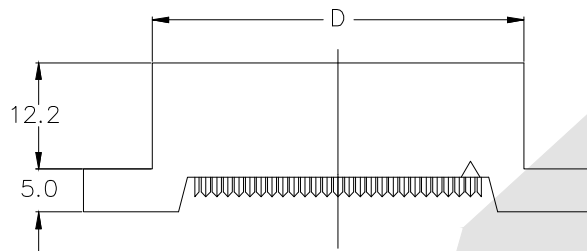

POSITION	A	B	C	D
10	43.06	10.16		22.36
14	48.14	15.24		27.44
16	50.68	17.78		29.98
20	55.76	22.86		35.06
26	63.38	30.48		42.68
34	73.54	40.64		52.84
40	81.16	48.26		60.46
50	93.86	60.96		73.16
60	106.56	73.66		85.86
62	109.10	76.20		88.40
64	111.64	78.74		90.94

SPECIFICATIONS

MATERIAL

INSULATOR:PBT, GLASS REINFORCED, RATED UL 94V-0

CONTACT:PHOSPHOR BRONZE OR BRASS

ELECTRICAL

CURRENT RATING:1 AMP

CURRENT RESISTANCE:30M OHM MAX.

INSULATION RESISTANCE:3000 MOHM MIN.

DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR 1 MIINUTE


OPERATING TEMPERATURE:-40 C TO +105 C

TERMINATED WITH 1.27MM PITCH FLAT RIBBON CABLE

Unless Otherwise specified tolerance
X. ± 0.35 X.XX: ± 0.20
X.X: ± 0.25 X.XXX: ± 0.15

SCALE:
As Shown
DRAW
Wu Feng Rong
CHECK
BobYang

UNIT:
mm
DATE
24/10/2020
DATE
24/10/2020



ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:

Edge Card IDC Type With Mouting Ear 2.54mm

DRAWING NO: ECDF02-XXXXX

PRODUCT NO: ECDF02-XXXXX

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8