
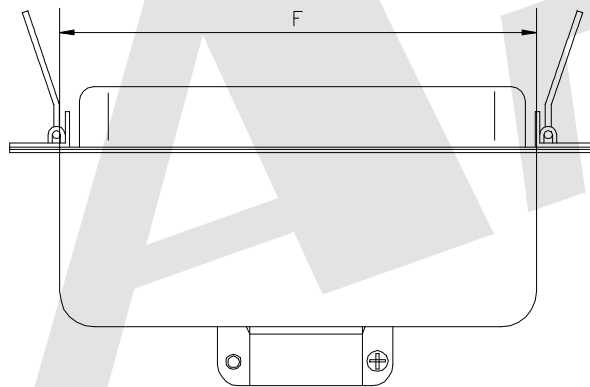


HSF

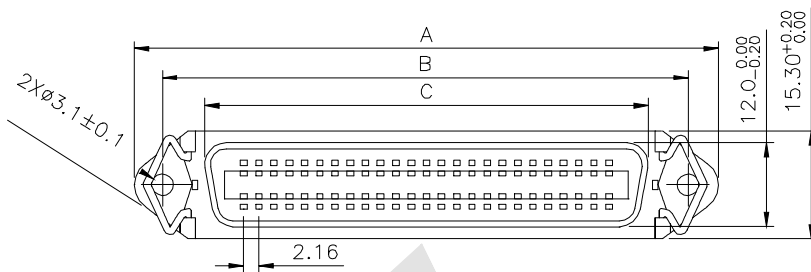

Pin	A±0.2	B±0.2	C±0.2	F±0.2
14	43.92	35.99	25.2	29.0
24	54.71	46.79	36.0	39.8
36	67.69	59.74	48.9	53.0
50	82.78	74.85	64.0	68.1

Current Rating:1A MAX
Dielectric Withstanding Voltage:750V AC for one minute
Insulation Resistance:1000M Ω Min. (at 500V DC)
Contact Resistance:30m Ω Max.
Total Mating Force:1.0 kgf Max
Total Unmating Force:1.0 kgf Min
Temperature:-55° C to +85° C
Contact:Brass
Gold Flash On Contact Area
Tin Plated On Solder Tails,Over Nickel
Shell:SPCC,Nickel Plated
INSULATOR:PBT G.F. UL 94V-0


Ordering Code:

57CC - $\frac{F}{1}$ - $\frac{X}{2}$ - $\frac{X}{3}$ - $\frac{X}{4}$ - $\frac{02}{5}$

- ① CONTACT TYPE: F:FEMALE M:MALE
② NO. OF CONTACT: 14 24 35 50
③ CONTACT PLATING: A: GOLD FLASH S: SELECTIVE GOLD PLATED 3U" SA: SELECTIVE GOLD PLATED 5U" SB: SELECTIVE GOLD PLATED 10U" SC: SELECTIVE GOLD PLATED 15U" SD: SELECTIVE GOLD PLATED 30U"
④ INSULATOR COLOR: B:BLUE K:BLACK W:WHITE
⑤ SERIES NUMBER:02

Unless Otherwise specified tolerance
X. ± 0.35 X.XX: ± 0.20
X.X: ± 0.25 X.XXX: ± 0.15

SCALE: As Shown UNIT: mm
DRAW Wu Feng Rong DATE 02/24/2021
CHECK BobYang DATE 02/24/2021



3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: 2.16mm CENTRONIC FEMALE SOLDER WIRE
& WITH 30 METAL SHELL STRAIGHT

DRAWING NO: 57CC-FXXX02

PRODUCT NO: 57CC-FXXX02

REV

DESCRIPTION

DATE