



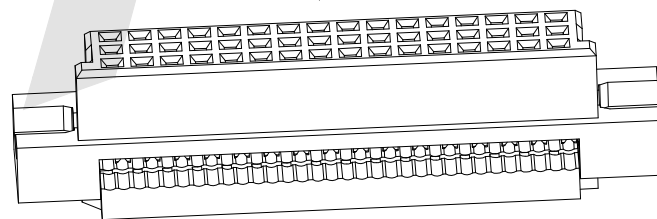
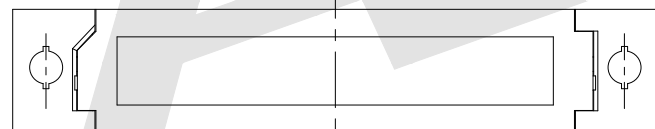


HSF

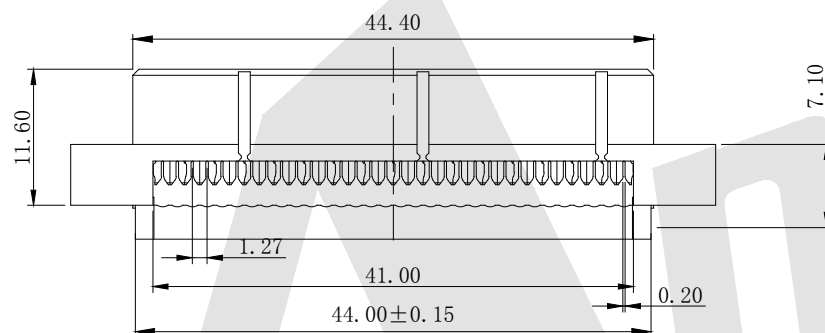

ROHS

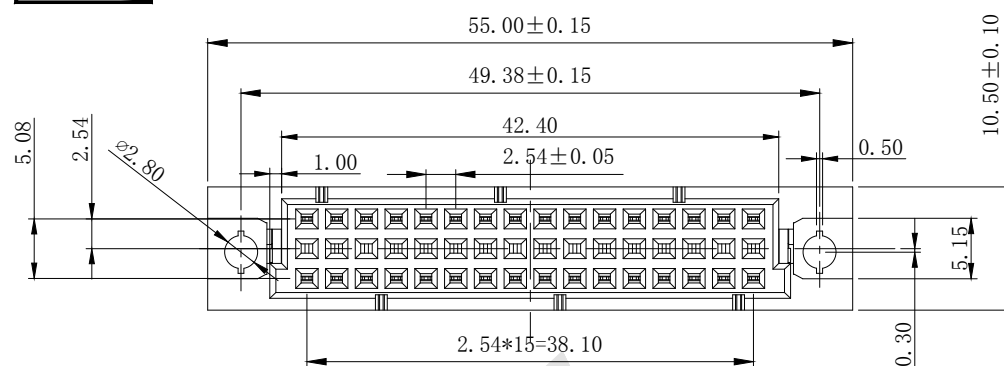

Mating Height



SPECIFICATION

Current Rating: 3.0A
Insulation Resistance: 1000MΩ min.
Contact Resistance: 30mΩ max
Withstand Voltage: AC 1000V For 1 Minute
Operating Temperature: -55° C to +105° C
Contact Material: Brass
Contact Plating: Au or Sn Over Ni
Insulator Material: PBT+30%GF UL 94V-0

Ordering Code:

DID - 32 - S0 - A - B - 3R
① ② ③ ④ ⑤ ⑥

- ① Series No:
② No. of Contacts
32:a+c 32P
③ Contact Plating
G0: Gold flash
S0: Gold flash/Ni
G1: 3u" Gold
S1: 3u" Gold/Ni
G2: 5u" Gold
S2: 5u" Gold/Ni
G3: 10u" Gold
S3: 10u" Gold/Ni
G4: 15u" Gold
S4: 15u" Gold/Ni
G5: 30u" Gold
S5: 30u" Gold/Ni
SN: Tin
- ④ Insulator Material
A: PBT
B: PA6T
C: LCP
D: PA46
E: PA9T
- ⑤ Packing
A: Tray
B: Bag
T: Tube
U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP
- ⑥ Series number
3R

Unless Otherwise specified
tolerance: 35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
DRAW Wu Feng Rong DATE 10/10/2020
CHECK BobYang DATE 10/10/2020



3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail: sales@antenk.com

TITLE: DIN41612 Vertical Female Type
32P IDC Connectors 3Row

DRAWING NO: DID-32-SOAB-3R

PRODUCT NO: DID-32-SOAB-3R



ADD MATING HEIGHT

12/12/2020

DESCRIPTION

DATE

REV

1 2 3 4 5 6 7 8