

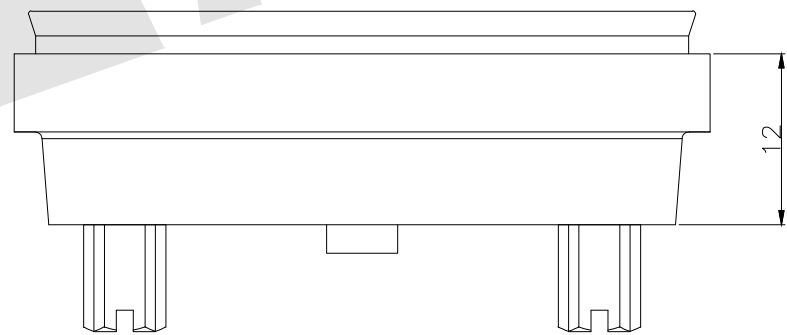


HSF

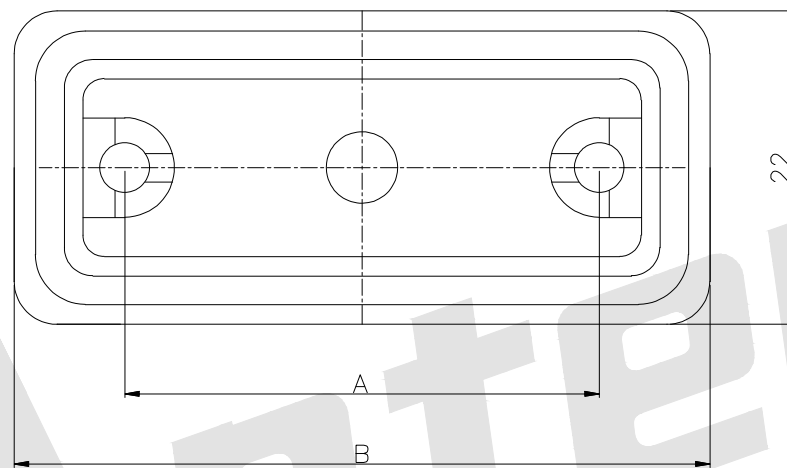

ROHS

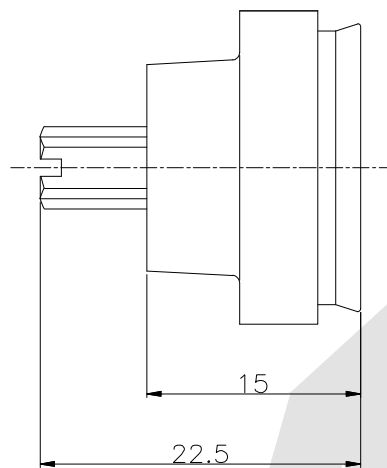

Description:

1 Features:

Waterproof grade: IP~IP68 (Temporary invasion did not, the biggest extreme pressure 1.3psi or 1 m water depth)

2 Material:

Plastic core: PBT +30% G.F (UL94V-0)-WH

3 Note:

- a. spray tested 48H can not have oxidation rusting
- b. Finished not have a curved needle, Rangular inconsistencies and other undesirable

Ordering Code:

WDBC - XX - 01

① ② ③

① Series

② Contact NO. :

- 09=09pin 15=15pin
- 25=25pin 37=37pin
- 50=50pin 104=104pin

③ Series Number:01


	A	B	C
09P	24.99	40.5	22.0
15P	33.32	48.83	22.0
25P	47.04	62.55	22.0
37P	63.50	79.01	22.0
50P	61.0	76.71	24.8
104P	63.50	79.01	26.8

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

Antenk® ANTENK ELECTRONICS CO., LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail:sales@antenk.com

SCALE: As Shown	UNIT: mm
DRAW Lv Xun Hua	DATE 13/06/2019
CHECK BobYang	DATE 13/06/2019

TITLE:
D-sub waterproof cover



DRAWING NO: WDBC-XX01
 PRODUCT NO: WDBC-XX01

REV	DESCRIPTION	DATE