

HSF



ROHS

SPECIFICATION

Current Rating:	0.75Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65 °C to +125 °C
Contact Material:	Brass
Insulator Material:	PA6T UL 94V-0 Black

Ordering Code:

FHBR01 - X - X - S - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦

① Series No:

② No. of Contacts
01 To 50

③ Contact Plating:

G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin

④ Connector Type
S:Single⑤ Plastic High:
H:2.1

Please mark the desired length in the H

⑥ Insulator Material

B:PA6T

C:LCP

E:PA9T

⑦ Packing

A:Tray




B:Bag

T:Tube

U:Tube+CAP

R:Tape&Reel

W:Tape&Reel+CAP

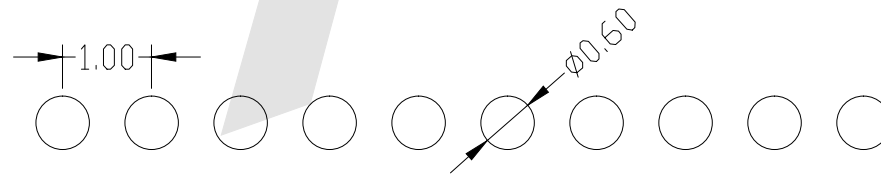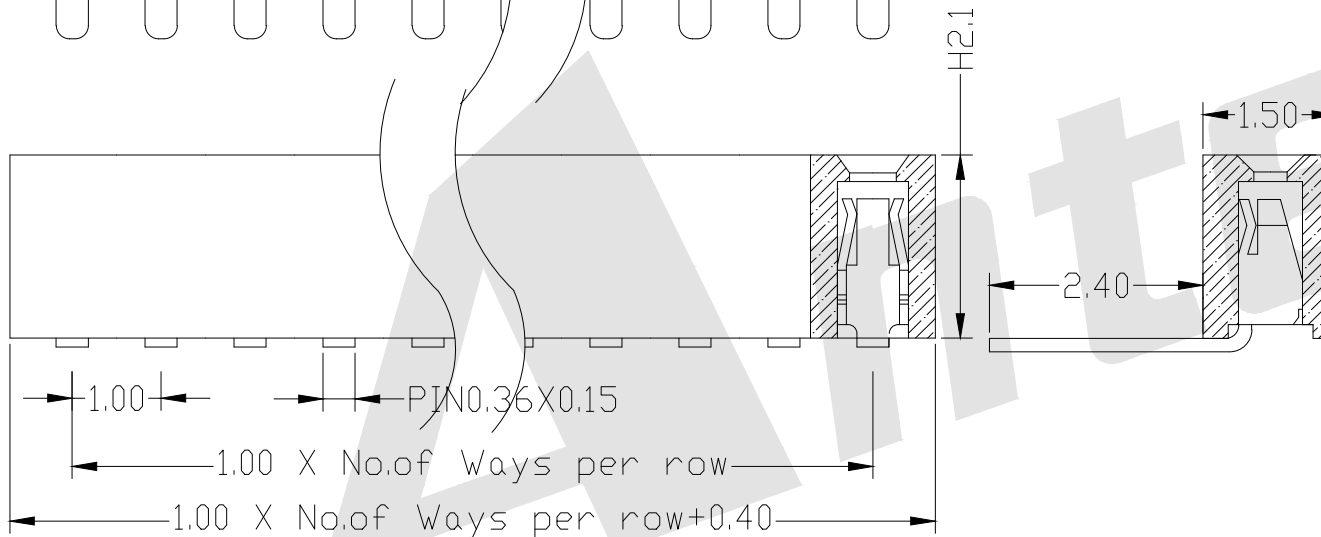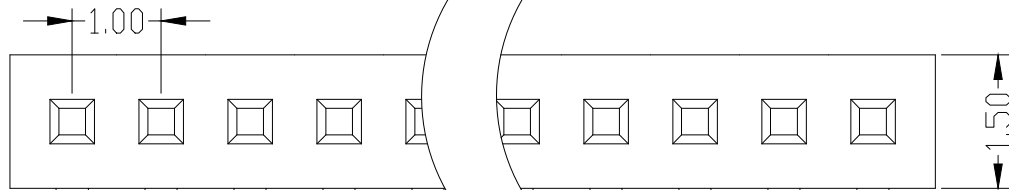

PCB LAYOUT

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE:
As Shown UNIT: mm
DRAW
Wu Feng Rong DATE
03/01/2021
CHECK
BobYang DATE
03/01/2021



3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
1.00mm Female Header
Single Row Right Angle Type

DRAWING NO: FHBR01-40SHBT

PRODUCT NO: FHBR01-40SHBT

REV

DESCRIPTION

DATE