

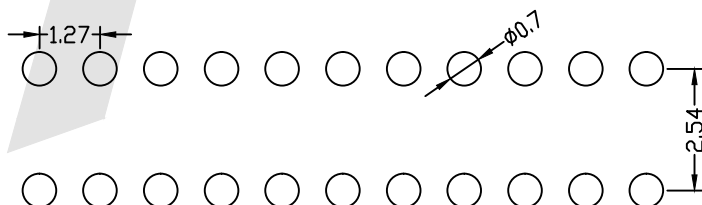



HSF

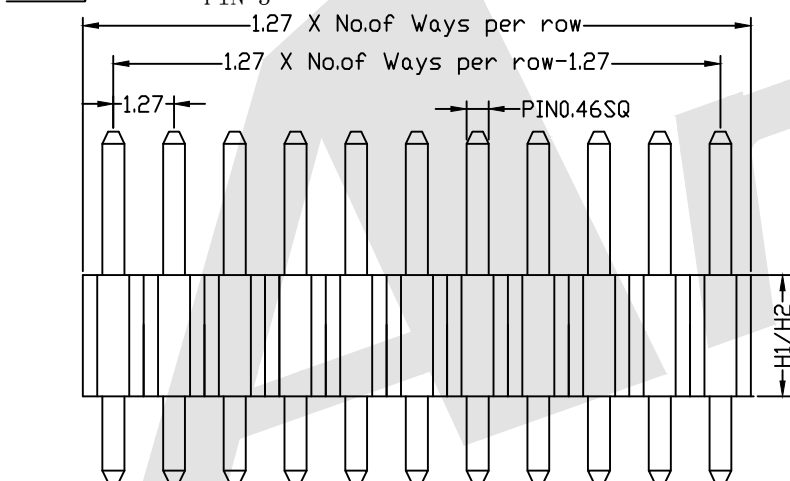

ROHS

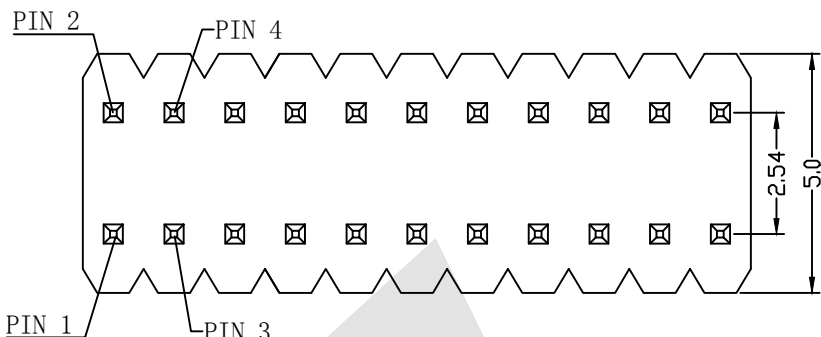

P. C. B LAYOUT

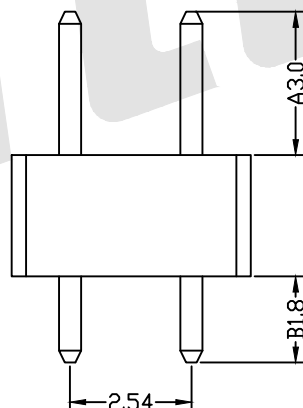

SPECIFICATIONS:

Current Rating:	1Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65° C to +125° C
Contact Material:	Brass
Insulator Material:	PA6T, UL94V-0, Black

Ordering Code:

PHCS10	-	X	-	X	-	D	-	A-B	-	X	-	X	-	X
①		②		③		④		⑤		⑥		⑦		⑧

- ① Series No:
② No. of Contacts:
02 To 100
③ Contact Plating:
G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin
④ Connector Type:
D: Dual
⑤ Pin Length:
A:0300=3.0mm
B:0180=1.8mm
Please mark the desired length in the A/B
⑥ Insulator Material:
B:PA6T
C:LCP
E:PA9T
⑦ Packing:
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP
⑧ Plastic High:
H1:1.7mm
H2:2.54mm

Standard IE P/N :

PHCS10-10-G0-D-0300-0180-B-B-H2

A	B	Unless Otherwise specified tolerance	
3.0	1.8	X. ±0.35	X. XX: ±0.20
		X. X: ±0.25	X. XXX: ±0.15
Optional		SCALE: As Shown	UNIT: mm
		DRAW YG ZHONG	DATE 12/11/2015
		CHECK BobYang	DATE 12/11/2015



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
1.27X2.54mm Pin Header Straight
Type Dual Row

DRAWING NO: PHCS10-XXD-0300-0180-XXX


PRODUCT NO: PHCS10-XXD-0300-0180-XXX

REV

Increase packing method and material

DESCRIPTION

DATE



3rd ANGLE PROJECTION