

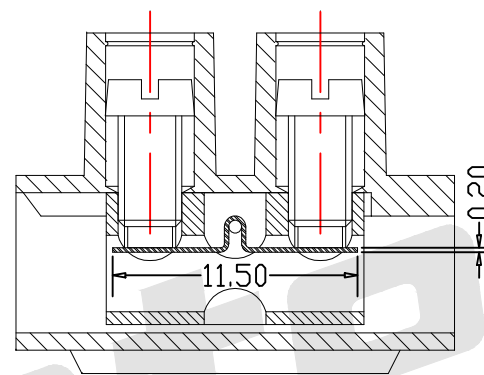


HSF

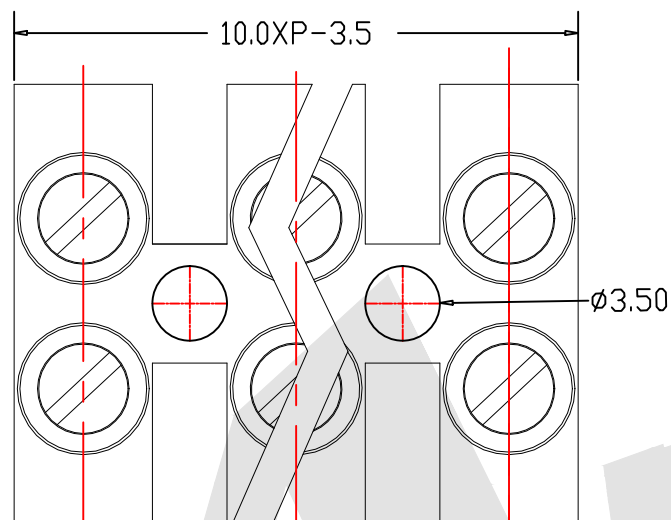

With Wire Cage
Type2

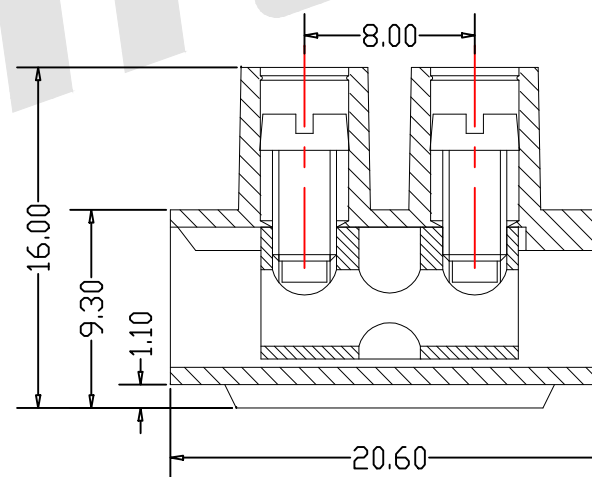

W/o Wire Cage
Type1

SPECIFICATION

Voltage Rating (额定电压): 300V
Current Rating (额定电流): 20A
Wire range (使用线径): 18-12AWG 2.5mm²
Housing (塑件): PA66+23%GF, UL94V-0
Solder Pin (接触材料): Brass, Nickel Plated (黄铜, 镀锡)
Screw (螺丝): M3.0 Steel, Zinc Plated (钢, 镀锌)
Torque (扭矩): 0.5N.m


Ordering Code:

AT801H -10.0 - XX - X - X - A

Poles:
Pitch: 02: 2 Contacts 10.0: 10.0mm 03: 3 Contacts
... .. 12: 12 Contacts
Insulator color:
T: Transparent
A: Green
B: Blue
C: Black
G: Gray
O: Orange
Option
A: Type1
B: Type2
A: Series number.

Unless Otherwise specified tolerance
X. ± 0.35 X.XX: ± 0.20
X.X: ± 0.25 X.XXX: ± 0.15

SCALE:
As Shown
DRAW
Wu Sai
CHECK
BobYang





ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
Feed Through Terminal Block Pitch:10.0 mm

DRAWING NO: AT801H-10.0XXXX-A

PRODUCT NO: AT801H-10.0XXXX-A



| REV | DESCRIPTION | DATE |
|-----|-------------|------|
| | | |
| | | |
| | | |
| | | |

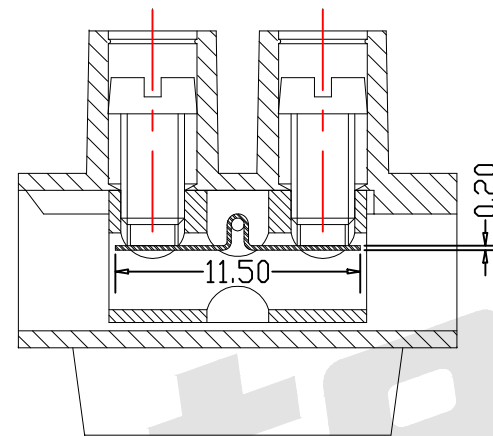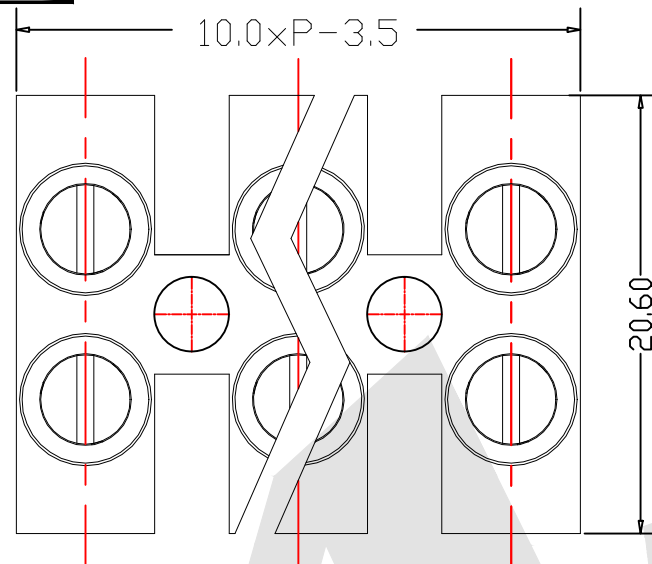

With Wire Cage
Type2

SPECIFICATION

Voltage Rating (额定电压): 300V
Current Rating (额定电流): 20A
Wire range (使用线径): 18—12AWG 2.5mm²
Housing (塑件): PA66+23%GF, UL94V-0
Solder Pin (接触材料): Brass. Nickel Plated (黄铜, 镀锡)
Screw (螺丝): M3.0 Steel, Zinc Plated (钢, 镀锌)
Torque (扭矩): 0.5N.m

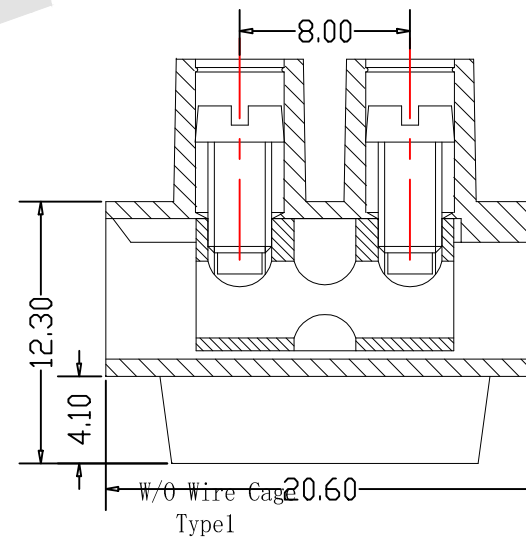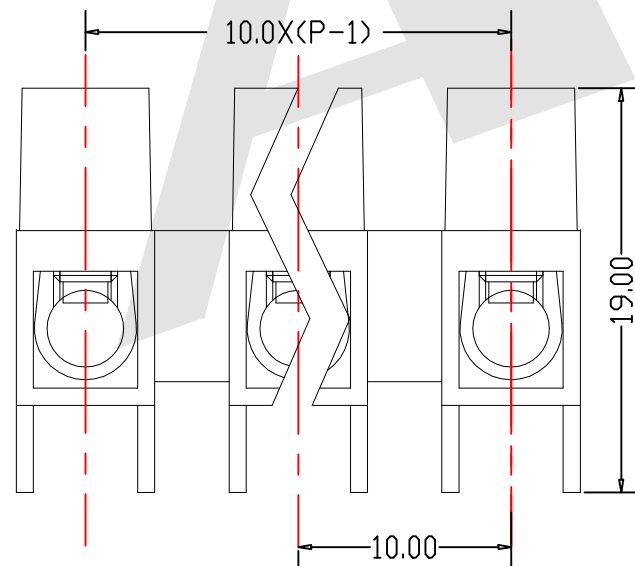

Ordering Code:

AT801H -10.0 - XX - X - X - X

| | | | | |
|-------------|-----------------|------------------|---------|----------|
| | | | | |
| | Poles: | | | |
| Pitch: | 02: 2 Contacts | Insulator color: | | |
| 10.0:10.0mm | 03: 3 Contacts | T:Transparent | Option | |
| | | A:Green | A:Type1 | Customer |
| Series No. | 12: 12 Contacts | B:Blue | B:Type2 | Request |
| | | C:Black | | |
| | | G:Gray | | |
| | | O:Orange | | |


Unless Otherwise specified tolerance

| | |
|------------------|--------------------|
| X. ± 0.35 | X. XX: ± 0.20 |
| X. X: ± 0.25 | X. XXX: ± 0.15 |

| | |
|--------------------|-------------|
| SCALE: As Shown | UNIT: mm |
|--------------------|-------------|

| | |
|--------|------------|
| DRAW | DATE |
| Wu Sai | 22/03/2018 |

| | |
|------------------|--------------------|
| CHECK BobYang | DATE 22/03/2018 |
|------------------|--------------------|



 ANTENK ELECTRONICS CO.,LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail:sales@antenk.com

TITLE:

Feed Through Terminal Block Pitch:10.0 mm

| | |
|-------------|------------------|
| DRAWING NO: | AT801H-10.0XXXXX |
|-------------|------------------|

| | |
|-------------|------------------|
| PRODUCT NO: | AT801H-10.0XXXXX |
|-------------|------------------|

| | | |
|-----|-------------|------|
| | | |
| | | |
| | | |
| REV | DESCRIPTION | DATE |