

HSF



ROHS





SPECIFICATION

Current Rating:	1Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65°C to +125°C
Contact Material:	Brass
Insulator Material:	PA6T UL 94V-0 Black

Ordering Code:

FHCR02 - $\frac{X}{1}$ - $\frac{X}{2}$ - $\frac{D}{3}$ - $\frac{X}{4}$ - $\frac{X}{5}$ - $\frac{X}{6}$ - $\frac{X}{7}$


- | | |
|---|----------------------|
| ① Series No: | ⑥ Insulator Material |
| ② No. of Contacts | B:PA6T |
| 02 To 100 | C:LCP |
| ③ Contact Plating: | E:PA9T |
| G0:Gold flash S0:Selective | ⑦ Packing |
| G1:3U" Gold S1:Selective 3u" | A:Tray |
| G2:5u" Gold S2:Selective 5u" | B:Bag |
| G3:10u" Gold S3:Selective 10u" | T:Tube |
| G4:15u" Gold S4:Selective 15u" | U:Tube+CAP |
| G5:30u" Gold S5:Selective 30u" | R:Tape&Reel |
| SN:Tin | W:Tape&Reel+CAP |
| ④ Connector Type | |
| D: Dual | |
| ⑤ Plastic High: | |
| H:4.3 | |
| Please mark the desired length in the H | |

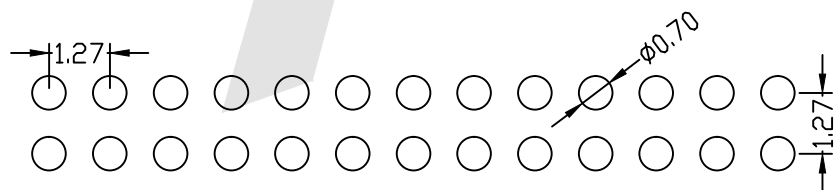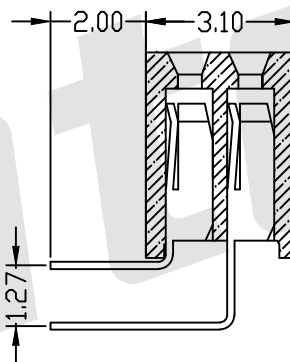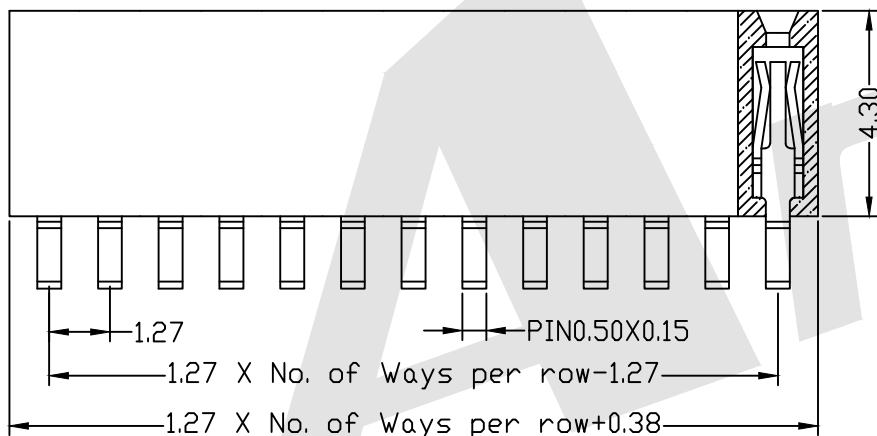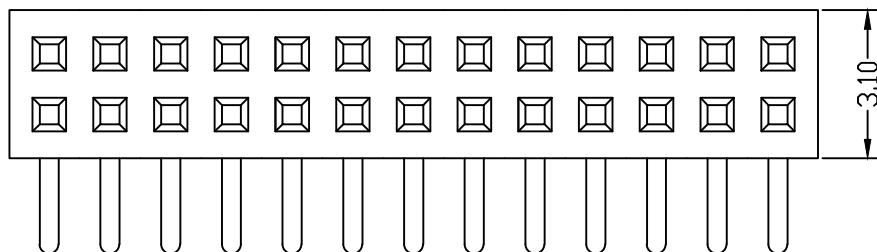

PCB LAYOUT

Unless Otherwise specified tolerance
X. ± 0.35 X.XX: ± 0.20
X.X: ± 0.25 X.XXX: ± 0.15

SCALE:	UNIT:
As Shown	mm
DRAW	DATE
YG ZHONG	01/05/2016
CHECK	DATE
BobYang	01/05/2016



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
1.27mm Female Header Dual Row AngleType

DRAWING NO: FHCR02-XXDXXX

PRODUCT NO: FHCR02-XXDXXX

REV

DESCRIPTION

DATE