

HSF



ROHS

SPECIFICATIONS

- Voltage rating: 350V AC,DC
- Current rating: 3A AC,DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40°C~+105°C

WAFER

- Part NO: AW1502V-xP
- Material: Pin: Brass/Tin over Nickel  
Insulator: Nylon 66, UL94V-0
- Mates with: AH1502 series Housing
- Color: White


Ordering Information:

AW1502V-XP - \*\*  
1 2  
1.Part No.  
2.Color:  
(blank) - White  
BK - Black

Ordering Information & Dimensions:

Poles	Part No.	Dimensions (mm)	
		A	B
02	AW1502V-02P	1.50	4.50
03	AW1502V-03P	3.00	6.00
04	AW1502V-04P	4.50	7.50
05	AW1502V-05P	6.00	9.00
06	AW1502V-06P	7.50	10.50
07	AW1502V-07P	9.00	12.00
08	AW1502V-08P	10.50	13.50
09	AW1502V-09P	12.00	15.00
10	AW1502V-10P	13.50	16.50
11	AW1502V-11P	15.00	18.00
12	AW1502V-12P	16.50	19.50
13	AW1502V-13P	18.00	21.00
14	AW1502V-14P	19.50	22.50
15	AW1502V-15P	21.00	24.00

Unit:mm

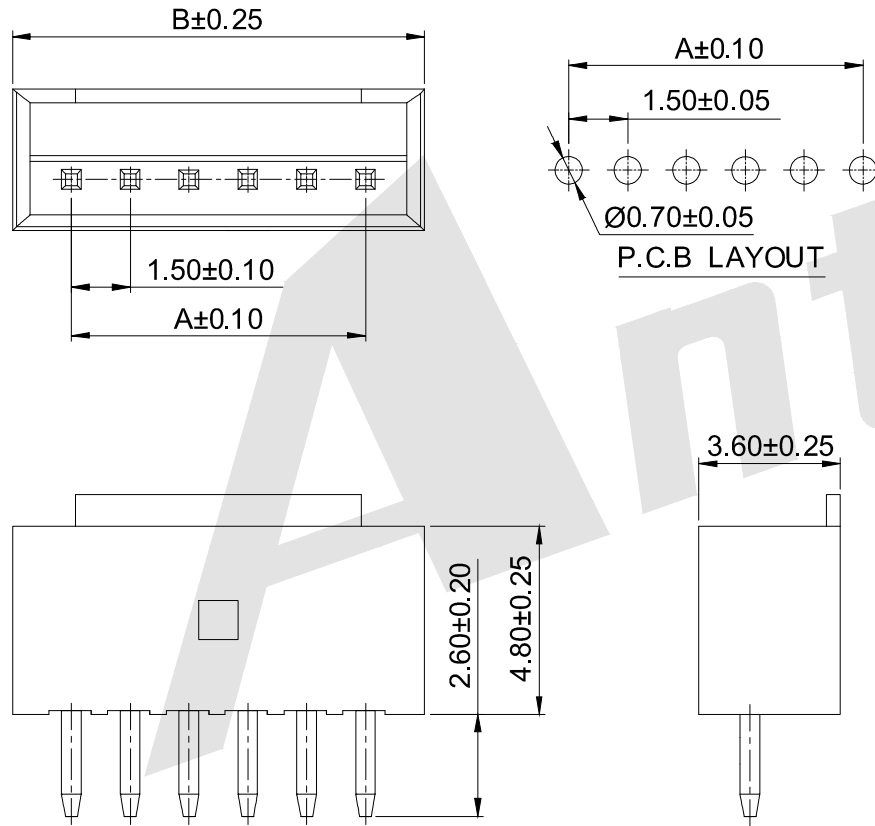


Unless otherwise specified tolerance  
X. ±0.35 X.XX: ±0.20  
X.X: ±0.25 X.XXX: ±0.15

**Antenk**® ANTENK ELECTRONICS CO., LTD  
Http://www.antenk.com  
E-mail:sales@antenk.com

SCALE: As Shown UNIT: mm  
DRAW: Jack Bao DATE: 12/16/2017  
CHECK: Bob Yang DATE: 12/16/2017

TITLE: 1.50mm pitch 180° Wafer Connector Series



DRAWING NO: AW1502V-xP

PRODUCT NO: AW1502V-xP

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		