


HSF

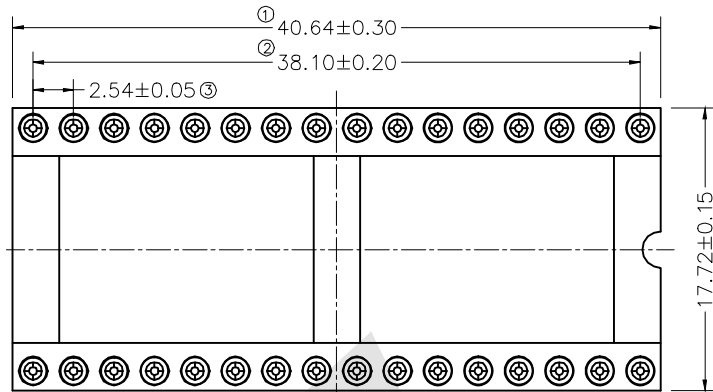

TYPE	NO. of Positions	A	B
A9	24	30.48	27.94
A10	28	35.56	33.02
A15	32	40.64	38.1
A19	36	45.72	43.18
A20	40	50.8	48.26
A22	48	60.96	58.42
A23	50	63.5	60.96
A24	52	66.04	63.5



TECHNICAL SPECS:

Current Rating: 1.0Amp
 Contact Resistance: 10MΩ max
 Dielectric Strength: Min 1000 V RMS
 Mechanical Life: Min 100 cycles
 Mating Pin: Ø0.40 to 0.56mm
 Operating Temperature: -40° C to +105° C
 Sleeve: Brass CuZn36Pb3 (C36000)
 Contact Clip(4 finger): BeCu(C17200)
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PPS+30%GF UL 94V-0
 06p~16P Insulators without center bar
 36p~52P Insulators with center two bar
 64P Insulators with center three bar

Ordering Code:

MIFES08 - ① - ② - ③ - ④ - ⑤

- ① Series No:
- ② Type selection
A9 A10 A15
A19...
- ③ Pin Plating
S1: Tin 150"
S2: Tin 200"
G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
- ④ Clip Plating
S1: Tin 150"
S1: Tin 200"
G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
- ⑤ Packing
A: Tray
B: Bag
C: Tube
D: Tape Reel

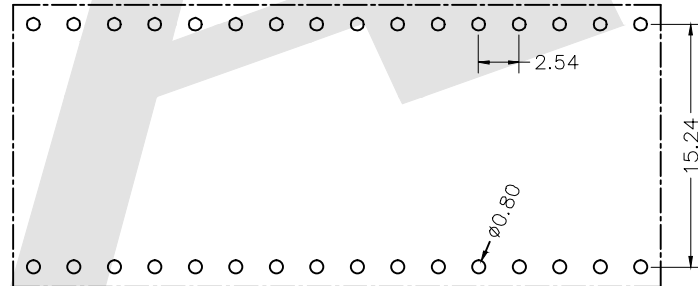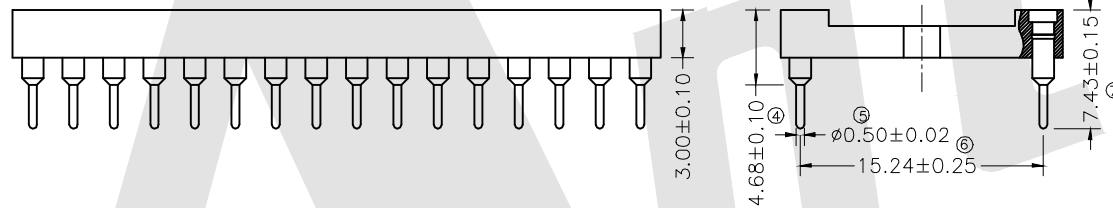


P. C. B LAYOUT

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

Antenk ANTENK ELECTRONICS CO.,LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

SCALE: As Shown	UNIT: mm
DRAW Mo Guo Xuan	DATE 16/10/2018
CHECK BobYang	DATE 16/10/2018

TITLE: 2.54mm Dual-in-line Socket Straight
 DIP (H=3 L=7.43)



DRAWING NO: MIFES08-XXXX
 PRODUCT NO: MIFES08-XXXX

2	Change of order number	18/10/15
REV	DESCRIPTION	DATE