


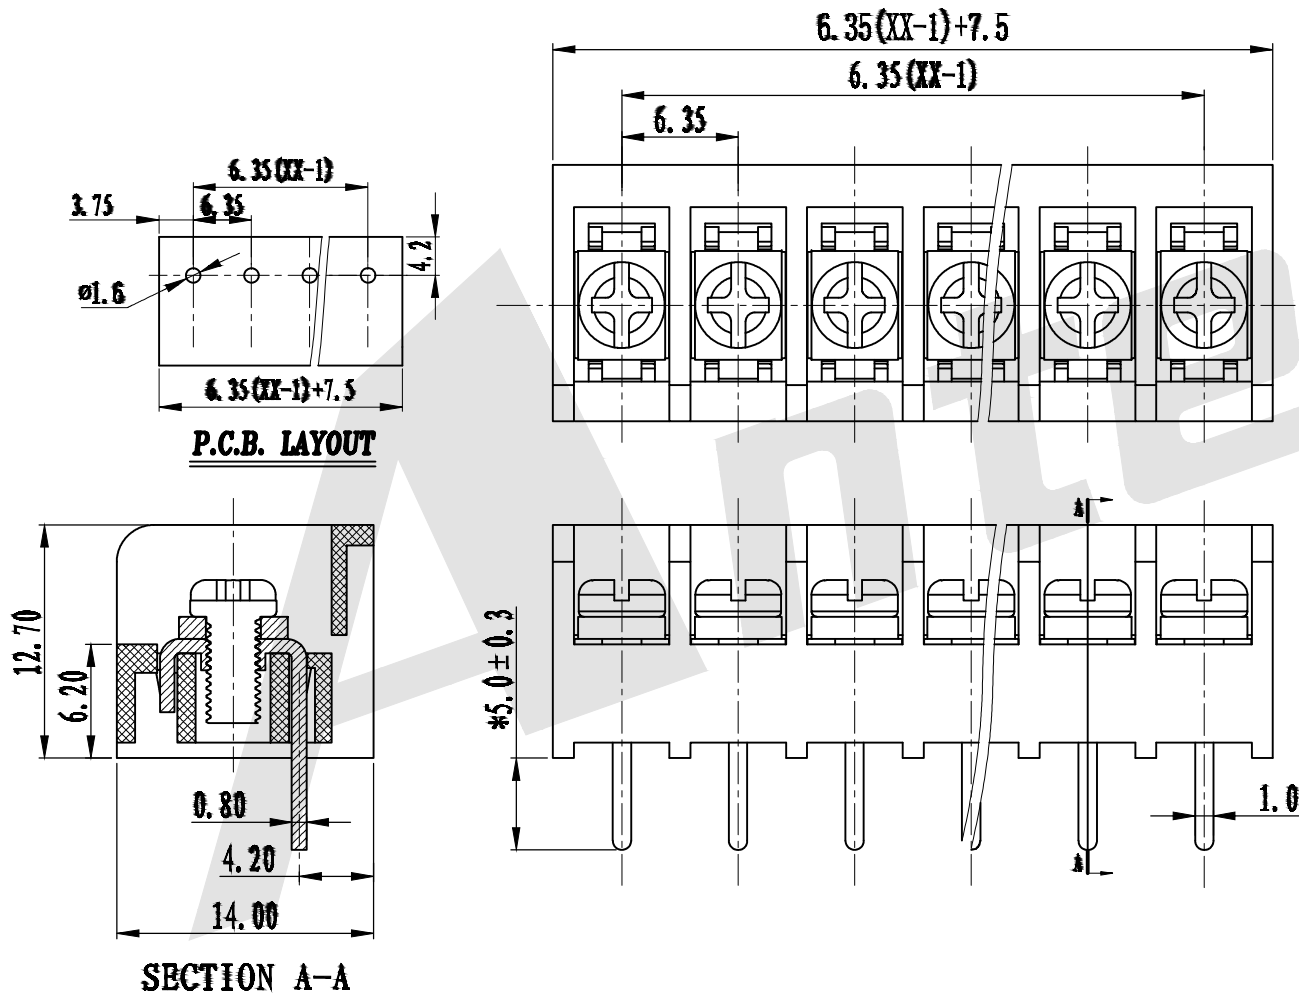

SPECIFICATION

Standard(参考标准): UL IEC

Voltage Rating (额定电压): 300V 450V

Current Rating(额定电流): 10A 13.5A

Wire range(使用线径): 22—16AWG 1.0mm²

Withstanding voltage(耐电压): AC2000V/1Min

Insulation resistance(绝缘电阻): 500MΩ/DC500V

Temp Rang(温度范围): -40° C ~ +105° C

Max Torque(最大锁紧力矩): 0.5Nm(4.5lb. in)

Housing(塑件): PA66, UL94V-0

Screw(螺丝): Steel, M3.0 Ni-Plated

Terminal(端子): Brass. 0.8t, Tin Plated

Pitch(间距): 6.35mm

Poles(极数): 2P-30P

Ordering Code:

AT816 - 6.35 - XX - X -01

Pitch: 6.35:6.35mm

Poles: 02: 2 Contacts Insulator color: 03: 3 Contacts A:Green B:Blue ... C:Black G:Gray 22: 22 Contacts O:Orange T:Transparent R:Red Y:Yellow W:White

01:Series number.

Unless Otherwise specified tolerance		 ANTENK ELECTRONICS CO.,LTD Http://www.antenk.com E-mail:sales@antenk.com
X. ± 0.35 X.XX: ± 0.20 X.X: ± 0.25 X.XXX: ± 0.15		
SCALE: As Shown	UNIT: mm	
DRAW Wu Sai	DATE 22/03/2018	
CHECK BobYang	DATE 22/03/2018	TITLE: Barrier Terminal Block Pitch:6.35mm
 3rd ANGLE PROJECTION		DRAWING NO: AT816-6.35XXX-01
		PRODUCT NO: AT816-6.35XXX-01

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		