
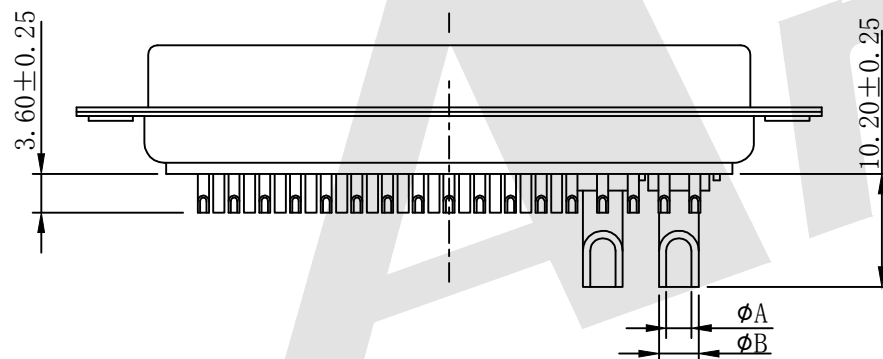



HSF

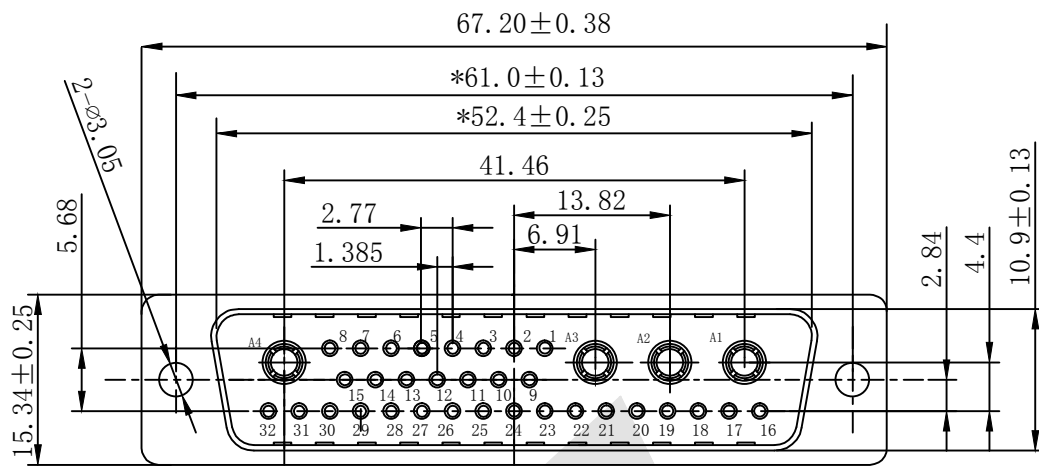

40 AMPS	Ø4.6	Ø5.5
30 AMPS	Ø3.4	Ø4.4
20 AMPS	Ø2.6	Ø3.6
10 AMPS	Ø1.75	Ø2.54
Current Rating	ØA	ØB
	Dimension	

SPECIFICATIONS:

ELECTRICAL:

INSULATOR RESISTANCE:	5,000 MegOHMS Min.
DIELECTRIC WITHSTANDING:	1,000 VAC r.m.s.
OPERATING TEMPERATURE:	-55℃~+125℃
CONTACT RESISTANCE:	30 MILLIOHMS Max.
POWER PINS:	SEE PART No. BELOW
SIGNAL PINS:	3AMPS

MECHANICAL:

CONTACT INSERTION FORCE:	4.5kg Max
CONTACT SEPARATOR FORCE:	0.3kg Min

MATERIALS:

CONTACTS:	BRASS
INSULATOR:	PBT UL94V-0 RATED, 230℃ PROCESS TEMP.

SHELL:

FINISH:

SHELL:

STEEL
NICKEL

Ordering Code:

PDB36W4	- M	-G0	-B	-20
①	②	③	④	⑤

① Series

② Contact Type:
M:Male F:Female③ Contact NO. :
G0: Gold flash G1: 3u" Gold
G2: 5u" Gold G3: 10u" Gold
G4: 15u" Gold G5: 30u" Gold④ Insulation Color Code:
B:Black L:Blue
W:White⑤ Power AMP:
10 = 10AMPS; 20 = 20AMPS;
30 = 30AMPS; 40 = 40AMPS;

Unless Otherwise specified tolerance

X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE:

As Shown

UNIT:

mm

DRAW

Lv Xun Hua

DATE


27/05/2019

CHECK

BobYang

DATE

27/05/2019



3rd ANGLE PROJECTION

ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com




TITLE:

POWER D-SUB 36W4 SOLDER CUP-MALE

DRAWING NO: PDB36W4-MXXX

PRODUCT NO: PDB36W4-MXXX

HSF

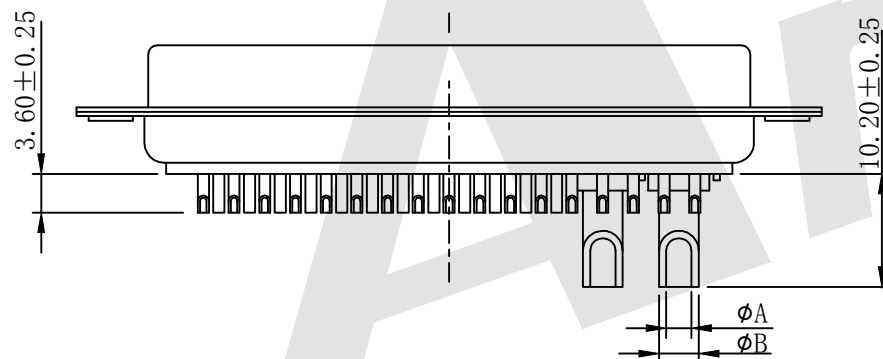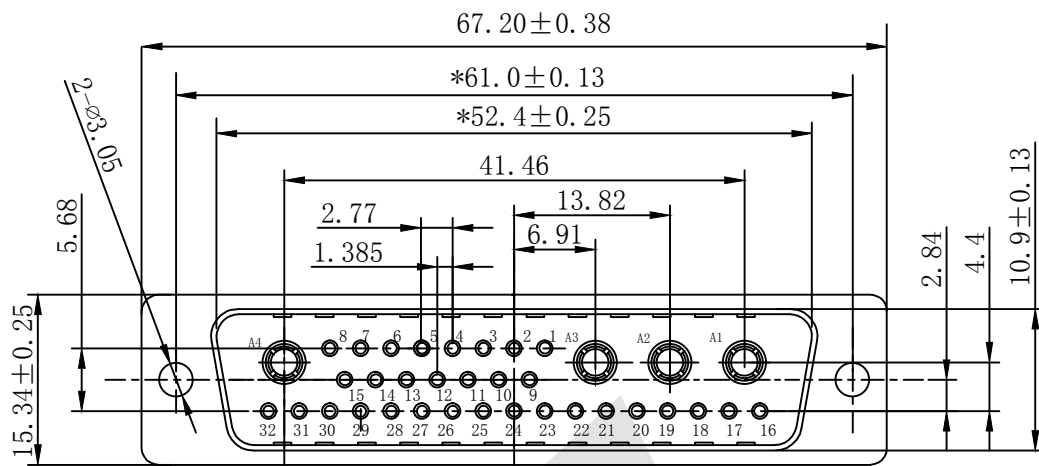

40 AMPS	Ø4.6	Ø5.5
30 AMPS	Ø3.4	Ø4.4
20 AMPS	Ø2.6	Ø3.6
10 AMPS	Ø1.75	Ø2.54
Current Rating	ØA	ØB
	Dimension	

SPECIFICATIONS:

ELECTRICAL:

INSULATOR RESISTANCE:	5,000 MegOHMS Min.
DIELECTRIC WITHSTANDING:	1,000 VAC r.m.s.
OPERATING TEMPERATURE:	-55℃~+125℃
CONTACT RESISTANCE:	30 MILLIOHMS Max.
POWER PINS:	SEE PART No. BELOW
SIGNAL PINS:	3AMPS

MECHANICAL:

CONTACT INSERTION FORCE:	4.5kg Max
CONTACT SEPARATOR FORCE:	0.3kg Min

MATERIALS:

CONTACTS:	BRASS
INSULATOR:	PBT UL94V-0 RATED, 230℃ PROCESS TEMP.

SHELL:

FINISH:

SHELL:

STEEL
NICKEL

Ordering Code:

PDB36W4	- M	-G0	-B	-20
①	②	③	④	⑤

① Series

② Contact Type:
M:Male F:Female③ Contact NO. :
G0: Gold flash G1: 3u" Gold
G2: 5u" Gold G3: 10u" Gold
G4: 15u" Gold G5: 30u" Gold④ Insulation Color Code:
B:Black L:Blue
W:White⑤ Power AMP:
10 = 10AMPS; 20 = 20AMPS;
30 = 30AMPS; 40 = 40AMPS;

Unless Otherwise specified tolerance

X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE:

As Shown

UNIT:

mm

DRAW

Lv Xun Hua

DATE


27/05/2019

CHECK

BobYang

DATE

27/05/2019



3rd ANGLE PROJECTION

ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com




TITLE:

POWER D-SUB 36W4 SOLDER CUP-MALE

DRAWING NO: PDB36W4-MXXX

PRODUCT NO: PDB36W4-MXXX

HSF

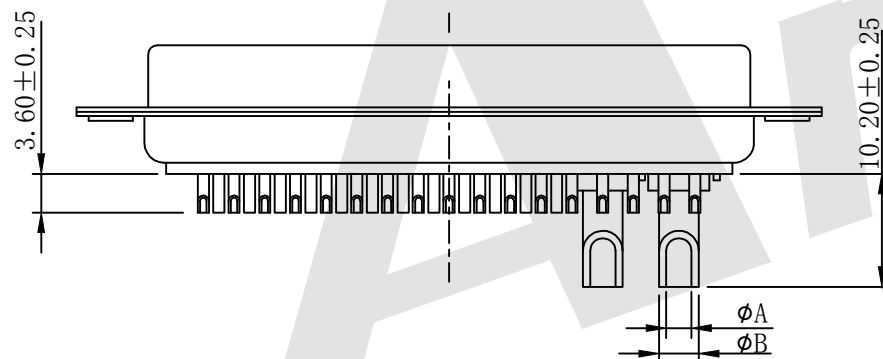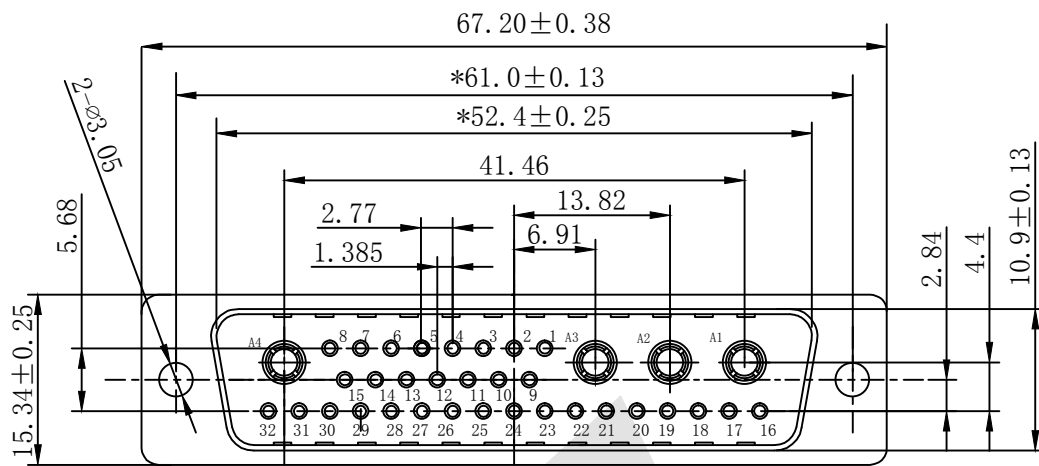

40 AMPS	Ø4.6	Ø5.5
30 AMPS	Ø3.4	Ø4.4
20 AMPS	Ø2.6	Ø3.6
10 AMPS	Ø1.75	Ø2.54
Current Rating	ØA	ØB
	Dimension	

SPECIFICATIONS:

ELECTRICAL:

INSULATOR RESISTANCE:	5,000 MegOHMS Min.
DIELECTRIC WITHSTANDING:	1,000 VAC r.m.s.
OPERATING TEMPERATURE:	-55℃~+125℃
CONTACT RESISTANCE:	30 MILLIOHMS Max.
POWER PINS:	SEE PART No. BELOW
SIGNAL PINS:	3AMPS

MECHANICAL:

CONTACT INSERTION FORCE:	4.5kg Max
CONTACT SEPARATOR FORCE:	0.3kg Min

MATERIALS:

CONTACTS:	BRASS
INSULATOR:	PBT UL94V-0 RATED, 230℃ PROCESS TEMP.

SHELL:

FINISH:

SHELL:

STEEL
NICKEL

Ordering Code:

PDB36W4	- M	-G0	-B	-20
①	②	③	④	⑤

① Series

② Contact Type:
M:Male F:Female③ Contact NO. :
G0: Gold flash G1: 3u" Gold
G2: 5u" Gold G3: 10u" Gold
G4: 15u" Gold G5: 30u" Gold④ Insulation Color Code:
B:Black L:Blue
W:White⑤ Power AMP:
10 = 10AMPS; 20 = 20AMPS;
30 = 30AMPS; 40 = 40AMPS;

Unless Otherwise specified tolerance

X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE:

As Shown

UNIT:

mm

DRAW

Lv Xun Hua

DATE


27/05/2019

CHECK

BobYang

DATE

27/05/2019



3rd ANGLE PROJECTION

ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:

POWER D-SUB 36W4 SOLDER CUP-MALE

DRAWING NO: PDB36W4-MXXX

PRODUCT NO: PDB36W4-MXXX