

HSF



SPECIFICATIONS

- Voltage rating: 500V AC,DC
- Current rating: 3A AC,DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 500MΩ min
- Temperature range: -40°C~+105°C




WAFER

- Part NO: AW2512V-F-xP-H
- Material: Pin: Brass/Tin over Nickel
Insulator: Nylon 66, UL94V-0
- Mates with: AH2512 series Housing
- Color: White

Ordering Information & Dimensions:


PART NO.	Dimensions	
	A	B
AW2512V-F-2P-H	2.50	7.50
AW2512V-F-3P-H	5.00	10.00
AW2512V-F-4P-H	7.50	12.50
AW2512V-F-5P-H	10.00	15.00
AW2512V-F-6P-H	12.50	17.50
AW2512V-F-7P-H	15.00	20.00
AW2512V-F-8P-H	17.50	22.50
AW2512V-F-9P-H	20.00	25.00
AW2512V-F-10P-H	22.50	27.50
AW2512V-F-11P-H	25.00	30.00
AW2512V-F-12P-H	27.50	32.50

Unit: mm

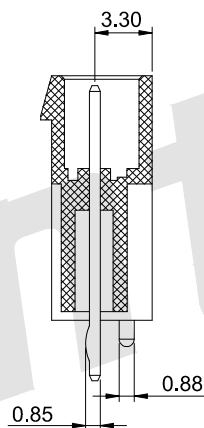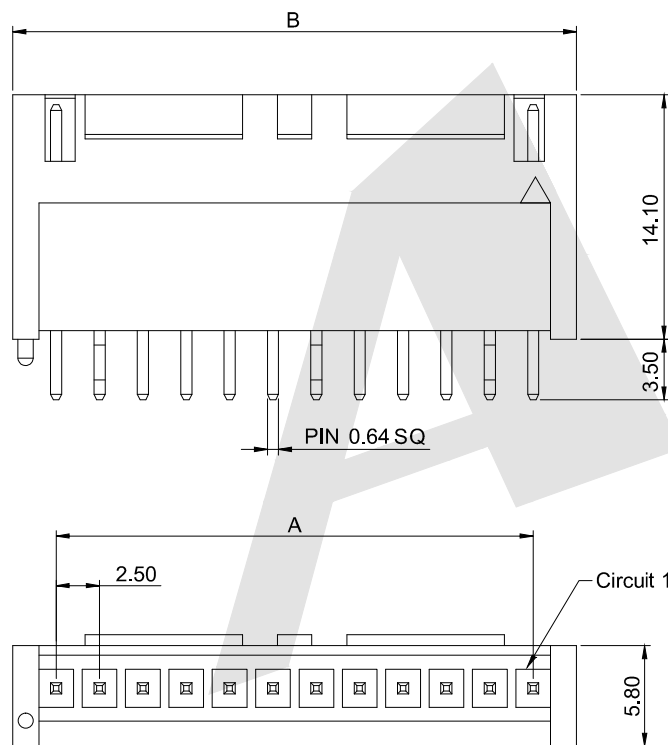

Unless otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
 DRAW Jack Bao DATE 5/14/2018
 CHECK Bob Yang DATE 5/14/2018



Antenk ANTENK ELECTRONICS CO., LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail: sales@antenk.com

TITLE: 2.50mm pitch 180° Wafer-High box type Connector Series

DRAWING NO: AW2512V-F-xP-H

PRODUCT NO: AW2512V-F-xP-H

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		