

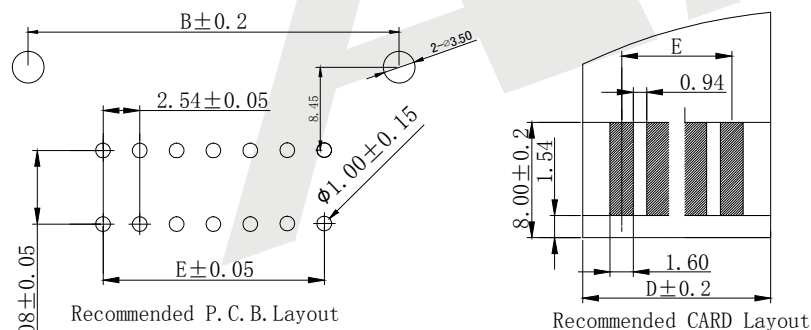
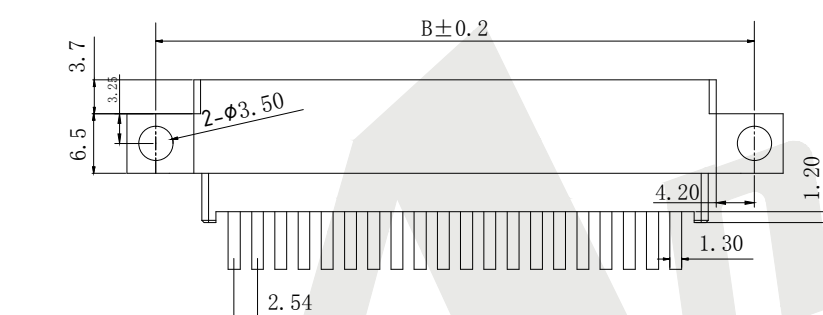


HSF

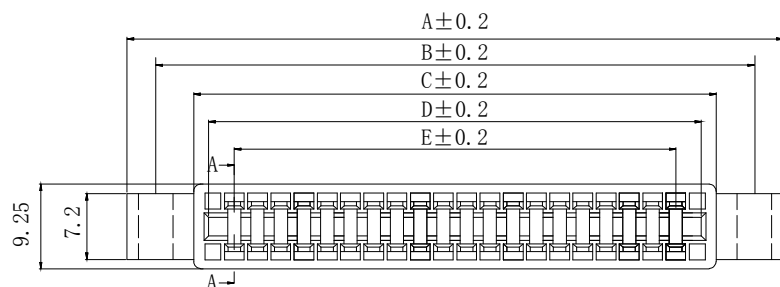

SECTION A-A



SPECIFICATION

1. CURRENT RATING: 3AMP
2. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC RMS 60Hz. 1MIN
3. CONTACT RESISTANCE: 20 MILLIOHMS MAX
4. INSULATION RESISTANCE: 5000 MEGOHMS MIN. At 500V DC
5. OPERATION TEMPERATURE: -55°C TO $+105^{\circ}\text{C}$
6. INSERTION FORCE: 0.4Kgf MAX. Per Pair

Insulator: PBT (UL94V-0)

CONTACT: BRASS OF PHOSPHOR BRONZE GOLD PLATED ON CONTACT AREA

TIN PLATED ON SOLDER TAILS, OVER NICKEL


Order code:

ECCR - X - B - 5 - S0 - X - B - 01
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① SERIES NO: ECCS
- ② Number of Pins: X
See Table
- ③ Pitch: B: 2.54MM
- ④ DIP Length: 5
5=5.00MM
- ⑤ Contact Plating
G0: Gold flash
S0: Gold flash/Ni
G1: 3U" Gold
G2: 5U" Gold
G3: 10U" Gold
G4: 15U" Gold
G5: 30U" Gold
SN: Tin
- ⑥ Plastic Materials:
P: PBT
L: LCP
- ⑦ Packing
A: Tray
B: Bag
T: Tube
U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP
- ⑧ Product NO.: 01

Unless Otherwise specified tolerance
 X. ± 0.35 X.XX: ± 0.20
 X.X: ± 0.25 X.XXX: ± 0.15

SCALE: As Shown UNIT: mm
 DRAW Wu Feng Rong DATE 07/11/2020
 CHECK BobYang DATE 07/11/2020



ANTENK ELECTRONICS CO., LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail: sales@antenk.com

TITLE:
 2.54mm Slot Right Angle DIP With Ear Connectors

DRAWING NO: ECCR-XB5SOXB01

PRODUCT NO: ECCR-XB5SOXB01

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8



PIN	A	B	C	D	E	PIN	A	B	C	D	E
4	25.96	19.68	11.37	7.92	2.54	64	102.16	95.88	87.57	84.12	78.74
6	28.5	22.22	13.91	10.46	5.08	66	104.7	98.42	90.11	86.66	81.28
8	31.04	24.76	16.45	13	7.62	68	107.24	100.96	92.65	89.2	83.82
10	33.58	27.3	18.99	15.54	10.16	70	109.78	103.5	95.19	91.74	86.36
12	3&12	29.84	21.53	18.08	12.7	72	112.32	106.04	97.73	94.28	88.9
14	38.66	32.38	24.07	20.62	15.24	74	114.86	108.58	100.27	96.82	91.44
16	41.2	34.92	26.61	23.16	17.78	76	117.4	111.12	102.81	99.36	93.98
18	43.74	37.46	29.15	25.7	20.32	78	119.94	113.66	105.35	101.9	96.52
20	46.28	40	31.69	28.24	22.86	80	122.48	116.2	107.89	104.44	99.06
22	48.82	42.54	34.23	30.78	25.4	82	125.02	118.74	110.43	106.98	101.6
24	51.36	45.08	36.77	33.32	27.94	84	127.56	121.28	112.97	109.52	104.14
26	53.9	47.62	39.31	35.86	30.48	86	130.1	123.82	115.51	112.06	106.68
28	5&44	50.16	41.85	38.4	33.02	88	132.64	126.36	118.05	114.6	109.22
30	58.98	52.7	44.39	40.94	35.56	90	135.18	128.9	120.59	117.14	111.76
32	61.52	55.24	46.93	43.48	38.1	92	137.72	131.44	123.13	119.68	114.3
34	64.06	57.78	49.47	46.02	40.64	94	140.26	133.98	125.67	122.22	116.84
36	66.6	60.32	52.01	48.56	43.18	96	142.8	136.52	128.21	124.76	119.38
38	69.14	62.86	54.55	51.1	45.72	98	145.34	139.06	130.75	127.3	121.92
40	71.68	65.4	57.09	53.64	48.26	100	147.88	141.6	133.29	129.84	124.46
42	74.22	67.94	59.63	56.18	50.8	102	150.42	144.14	135.83	132.38	127
44	76.76	70.48	62.17	58.72	53.34	104	152.96	146.68	138.37	134.92	129.54
46	79.3	73.02	64.71	61.26	55.88	106	155.5	149.22	140.91	137.46	132.08
48	81.84	75.56	67.25	63.8	58.42	108	158.04	151.76	143.45	140	134.62
50	84.38	78.1	69.79	66.34	60.96	110	160.58	154.3	145.99	142.54	137.16
52	86.92	80.64	72.33	68.88	63.5	112	163.12	156.84	148.53	145.08	139.7
54	89.46	83.18	74.87	71.42	66.04	114	165.66	159.38	151.07	147.62	142.24
56	92	85.72	77.41	73.96	68.58	116	168.2	161.92	153.61	150.16	144.78
58	94.54	88.26	79.95	76.5	71.12	118	170.74	164.46	156.15	152.7	147.32
60	97.08	90.8	82.49	79.04	73.66	120	173.28	167	158.69	155.24	149.86
62	99.62	93.34	85.03	81.58	76.2	128	183.44	177.16	168.85	165.4	160.02

Unless Otherwise specified tolerance
X. ± 0.35 X. XX: ± 0.20
X. X: ± 0.25 X. XXX: ± 0.15

SCALE: As Shown	UNIT: mm
DRAW Wu Feng Rong	DATE 07/11/2020
CHECK BobYang	DATE 07/11/2020
 3rd ANGLE PROJECTION	



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: 2.54mm Slot Right Angle DIP With Ear Connectors	
DRAWING NO:	ECCR-XB5SOXB01
PRODUCT NO:	ECCR-XB5SOXB01

REV	DESCRIPTION	DATE
1	2	3
4	5	6
7	8	