

HSF



ROHS

SPECIFICATION

Current Rating: 3Amp
Insulation Resistance: 1000M ohms min
Contact Resistance: 20m ohms max
Dielectric Withstanding: AC500V
Operating Temperature: -65° C to +125° C
Contact Material: Brass
Insulator Material: PBT, UL 94V-0 Black

Ordering Code:

PHER11 - X - X - T - A-D-B - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
② No. of Contacts
03 To 120
③ Contact Plating:
G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin
④ Connector Type
T:Three
⑤ Pin Length:
A:0300=3.00mm
D:0562=5.62mm
B:0300=3.00mm
Please mark the desired
length in the A/C/D/B
⑥ Insulator Material
A:PBT
B:PA6T
C:LCP
D:PA46
E:PA9T
⑦ Packing:
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP
⑧ Plastic High
H1:1.70mm
H2:2.54mm
H3:2.00mm
H4:1.50mm

PCB LAYOUT

L1=22.58mm
L2=27.66mm
L3=32.74mm

Standard IE P/N :

PHER11-XX-G0-T-0300-0562-0300-B-B-H2

A	D	B
3.0	5.62	3.0

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

Optional

SCALE:
As Shown
DRAW
Wu Feng Rong
CHECK
BobYang

UNIT:
mm
DATE
11/12/2018
DATE
11/12/2018







Antenk® ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
2.54mm Pin Header Three Row
Double Plastic Angle Type

DRAWING NO: PHER11-XX-G0-T-0300-0562-0300-B-B-H2

PRODUCT NO: PHER11-XX-G0-T-0300-0562-0300-B-B-H2

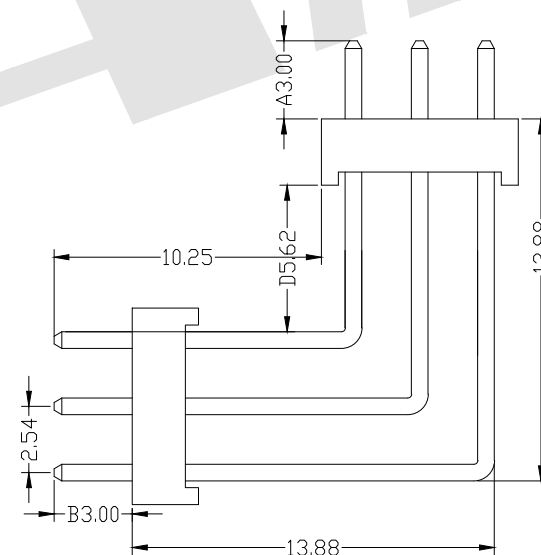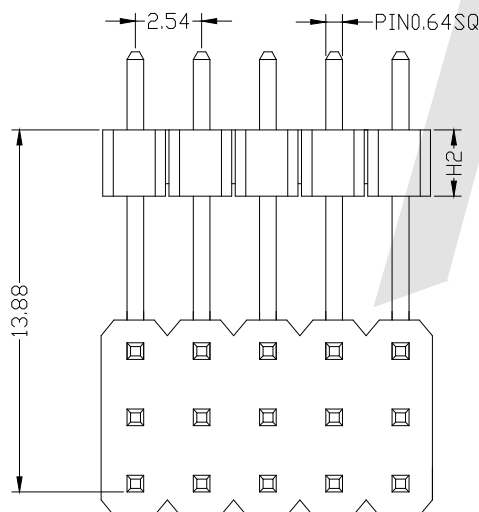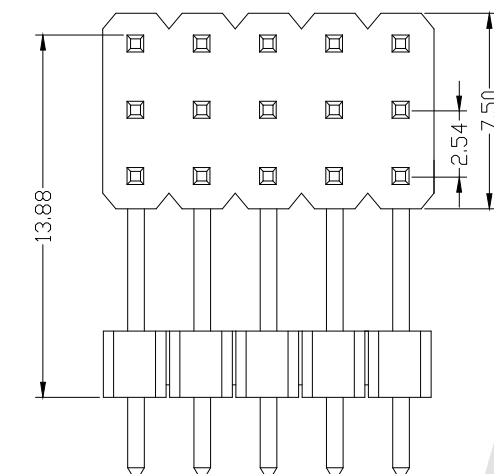

REV

DESCRIPTION

DATE