
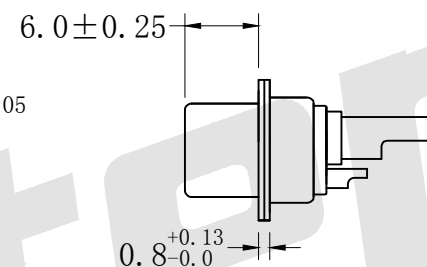


HSF

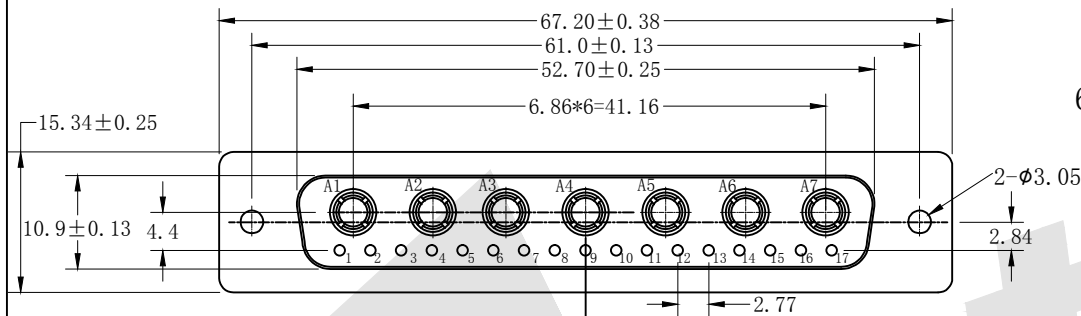

SPECIFICATIONS:

ELECTRICAL:

INSULATOR RESISTANCE: 5,000 MegOHMS Min.

DIELECTRIC WITHSTANDING: 1,000 VAC r.m.s.

OPERATING TEMPERATURE: -55°C~+125°C

CONTACT RESISTANCE: 30 MILLIOHMS Max.

POWER PINS: SEE PART No. BELOW

SIGNAL PINS: 3AMPS

MECHANICAL:

CONTACT INSERTION FORCE: 4.5kg Max

CONTACT SEPARATOR FORCE: 0.3kg Min

MATERIALS:

CONTACTS: BRASS

INSULATOR: PBT UL94V-0 RATED,

230°C PROCESS TEMP.

SHELL: STEEL


FINISH:

SHELL: NICKEL

Ordering Code:

PDB24W7	-F	-G0	-B	-20
①	②	③	④	⑤

① Series

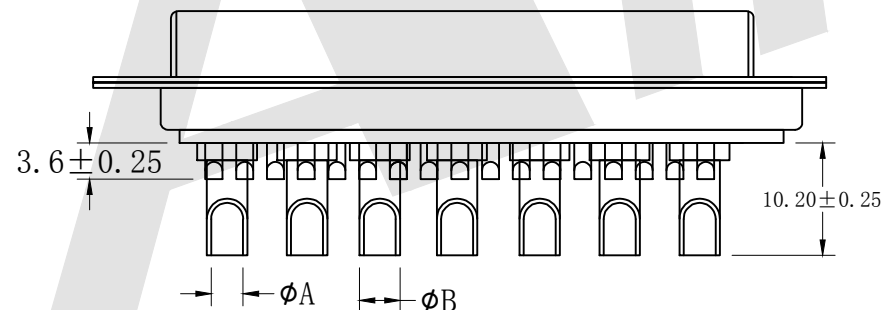② Contact Type:
M:Male F:Female③ Contact NO.:
G0: Gold flash G1: 3u" Gold
G2: 5u" Gold G3: 10u" Gold
G4: 15u" Gold G5: 30u" Gold④ Insulation Color Code:
B:Black L:Blue
W:White⑤ Power AMP:
10 = 10AMPS; 20 = 20AMPS;
30 = 30AMPS; 40 = 40AMPS;

40 AMPS	φ4.6	φ5.5
30 AMPS	φ3.4	φ4.4
20 AMPS	φ2.6	φ3.6
10 AMPS	φ1.75	φ2.54
Current Rating	φA	φB
	Dimension	


Unless Otherwise specified tolerance

X. ±0.35 X.XX:±0.20
X.X:±0.25 X.XXX:±0.15

SCALE: As Shown UNIT: mm

DRAW Lv Xun Hua DATE 27/05/2019

CHECK BobYang DATE 27/05/2019



ANTENK ELECTRONICS CO.,LTD

Http://www.antenk.com

E-mail:sales@antenk.com

TITLE:

POWER D-SUB 21W4 SOLDER CUP-FEMALE

DRAWING NO: PDB24W7-FXXX

PRODUCT NO: PDB24W7-FXXX

REV

DESCRIPTION

DATE