

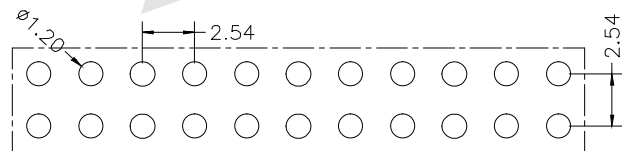
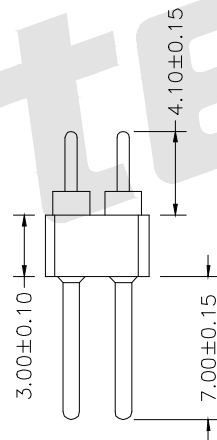


HSF

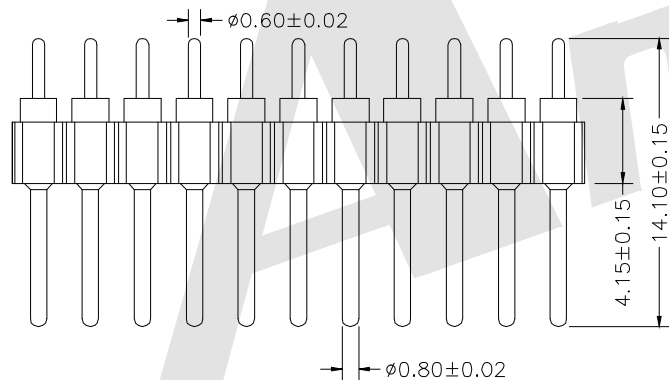

ROHS

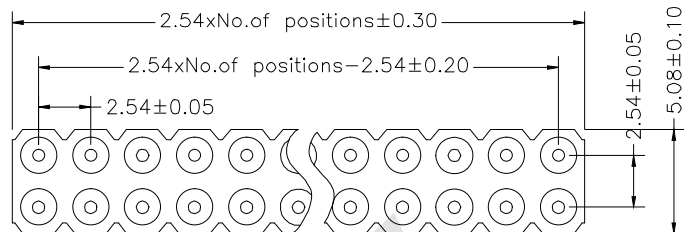

P. C. B LAYOUT

Technical Date

Material:

Pin(outer sleeve)Brass,machined CuZn38Pb2

Plating(outer sleeve)

Tin Plated:2m/80 μ " N, 5 μ m/200 μ " Sn

Gold Pated: 2 μ m/80 μ " N, 0.8 μ " gold

Insuiator: PPS UL94V-0

Electrical:

Current rating: 3AmPs/contact max.

Current resistance: ≤4mΩ/contact

Insulation resistance: ≥1000MΩ at V=100V

Operating vcitage: 60VAC/DC

Mechanical:

Operating TemPerature: -40° C to+105°

Soldering TemPerature: +255°

Ordering Code:

MPHES - X - X - X - 09
① ② ③ ④ ⑤

① MPHES series

② Contact NO:

XX=XXpin

For example:

06=06pin

④ Packing

A:Tray

B:Bag

C:Tube

D:Tape Reel

⑤ Series number

09

③ Pin Plated

0: No

1: Tin 150 μ "

2: Tin 200 μ "

3: G/F

4: Gold 3 μ "

5: Gold 10 μ "

6: Gold 15 μ "

S: Special

Unless Otherwise specified tolerance

X. ±0.35 X.XX: ±0.20

X.X: ±0.25 X.XXX: ±0.15

SCALE:
As ShownUNIT:
mmDRAW
Wu SaiDATE
22/03/2018CHECK
BobYangDATE
22/03/2018

3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO.,LTD

Http://www.antenk.com

E-mail:sales@antenk.com

TITLE: Machined Pin connectors 2.54 mm:
MPHES series

DRAWING NO: MPHES-XXX09

PRODUCT NO: MPHES-XXX09

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8