

HSF




SPECIFICATION

Current Rating: 2.0 Amp
 Insulation Resistance: 1000MΩ min
 Contact Resistance: 20MΩ max
 Withstand Voltage: 500V AC/DC
 Operating Temperature: -40°C to +105°C
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA6T+30%GF UL 94V-0




Ordering Code:

BHCM06 - X - X - X - X - X - W - C
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts
06 08 10 12 14 16 18
20 22 24 26 28 30 34
36 40 44 50 60 68
- ③ Contact Plating:
G0: Gold flash S0: Selective
G1: 3U" Gold S1: Selective 3u"
G2: 5u" Gold S2: Selective 5u"
G3: 10u" Gold S3: Selective 10u"
G4: 15u" Gold S4: Selective 15u"
G5: 30u" Gold S5: Selective 30u"
SN: Tin
- ④ Color Insulator
B: Black
U: Blue
W: White
- ⑤ Insulator Material
B: PA6T
C: LCP
E: PA9T
- ⑥ Packing
A: Tray
B: Bag
T: Tube
U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP
- ⑦ Dimension option:
W: 0760=7.60mm
C: 0380=3.80mm



PCB LAYOUT

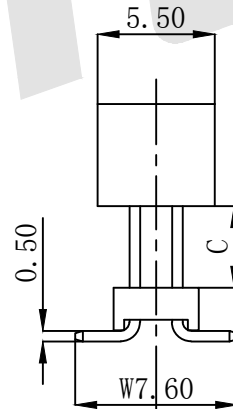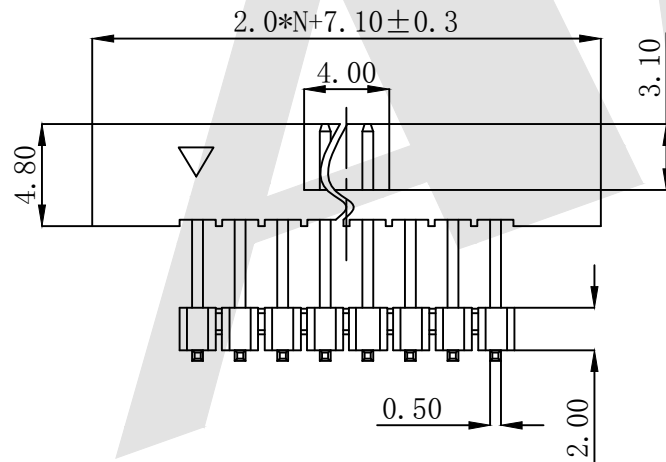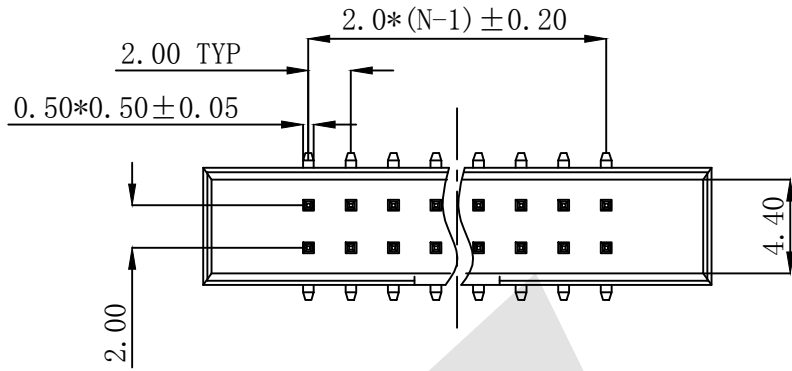

Standard IE P/N :

BHCM06-10-G0-B-B-B-0760-0380

Dimension antitheses List		
ITEM	W	C
Standard	7.60	3.80
Alternate		

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15


SCALE:	UNIT:
As Shown	mm
DRAW YG ZHONG	DATE 01/05/2016
CHECK BobYang	DATE 01/05/2016

Antenk ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

TITLE:
2.00mm Box Header SMT H=4.8 Add Housing

DRAWING NO: BCHM06-XXXXXX

PRODUCT NO: BCHM06-XXXXXX



REV	DESCRIPTION	DATE