



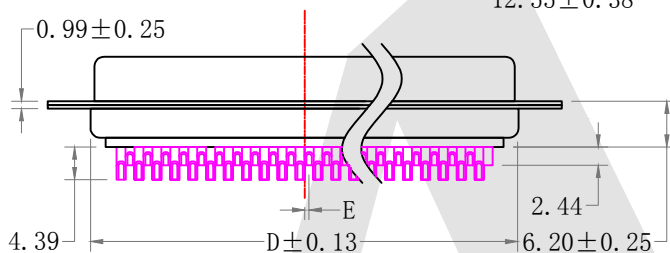


HSF

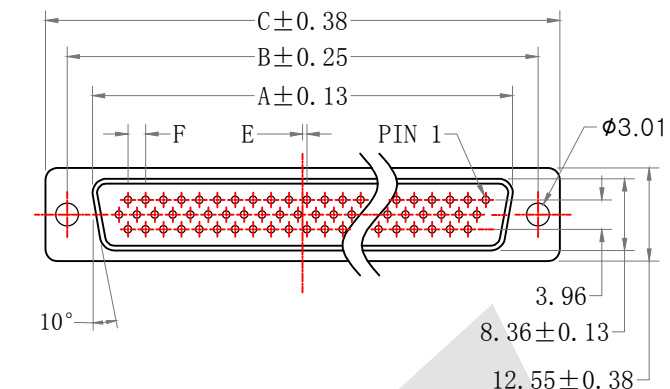

ALL CLINCH-NUTS ARE 4-40 INTERNAL THREADS

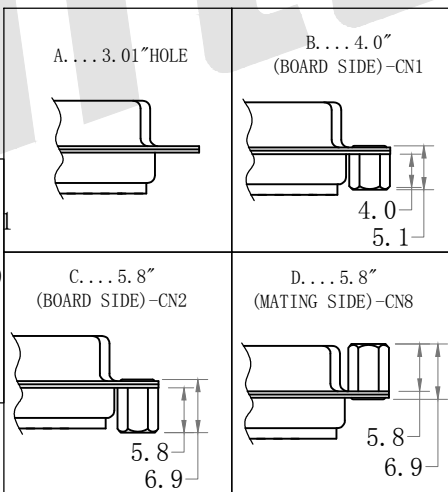

DIMENSIONS (mm)						
No. OF PINS	A	B	C	D	E	F
15	16.92	24.99	30.81	19.28	0.25	2.29
26	25.25	33.33	39.14	27.51	0.51	2.29
44	38.96	47.04	53.04	41.28	0.51	2.29
62	55.42	63.50	69.32	57.71	0.58	2.39

MATERIALS AND FINISH

SHELL:STEEL MATERIAL, FRONT SHELL NICKEL FINISHED

BACK SHELL NICKEL FINISHED

INSULATOR:PBT THERMOPLASTIC, 30% GLASS

FILLED, UL 94V-0 RATED, WHITE COLOR

CONTACT MATERIAL:BRASS

CONTACT FINISH:FULL 2u\"/>

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 5.0 AMPS

CONTACT RESISTANCE : 30 MILLIOHMS MAX.

DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN

INSULATION RESISTANCE : 5000 MEGAOHMS MIN

TEMPERATURE RATING : -55℃~+105℃

Ordering Code:

MHDB01 - F - X - X - X

① ② ③ ④ ⑤ ⑥

① MHDB Series

② Contact Type:

M:Female

③ Contact NO.:

15=15Pin 26=26Pin

44=44Pin 62=62Pin

④ Mounting Option:

A: Ø3.05\"/>

B: 4.0\"/>

C: 5.8\"/>

D: 5.8\"/>

E: 5.8\"/>

F: 5.8\"/>

4.80\"/>

G: 5.8\"/>

5.80\"/>

⑤ Insulation Color Code:

B:Black G:Grey

W:White L:Blue

⑥ Contact Plating

S: Selective Gold

S1:Selective 3u\"/>

S2:Selective 5u\"/>

S3:Selective 10u\"/>

S4:Selective 15u\"/>

S5:Selective30u\"/>

G0: Gold flash

G1: 3u\"/>

G2: 5u\"/>

G3: 10u\"/>

G4: 15u\"/>

G5: 30u\"/>

Unless Otherwise specified tolerance

X. ±0.35 X.XX: ±0.20

X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm

DRAW Lv Xun Hua DATE 05/03/2019

CHECK BobYang DATE 05/03/2019



ANTENK ELECTRONICS CO.,LTD

Http://www.antenk.com

E-mail:sales@antenk.com

TITLE: D-SUB FEMALE High density Solder type Machine Pin

DRAWING NO: MHDB01-FXXXX

PRODUCT NO: MHDB01-FXXXX

REV DESCRIPTION

DATE