

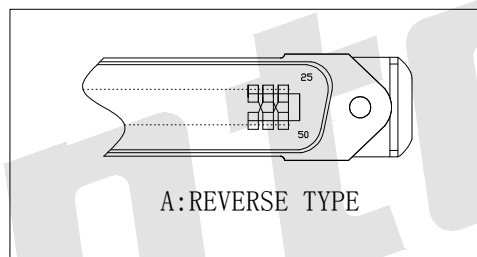
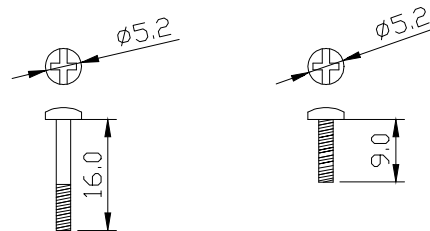
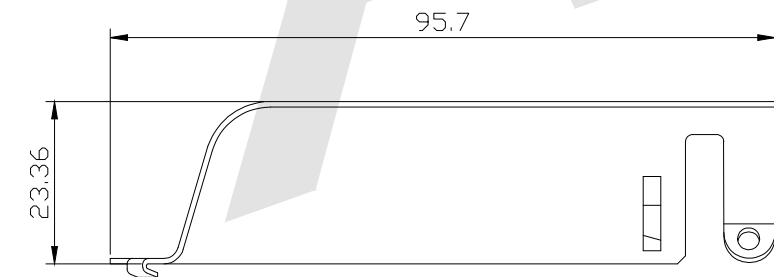
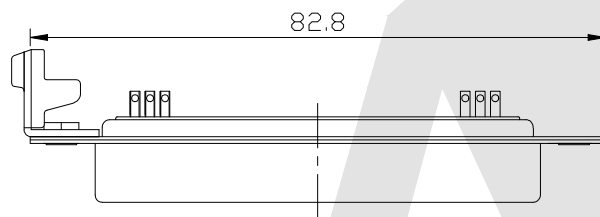


B:STANDARD TYPE

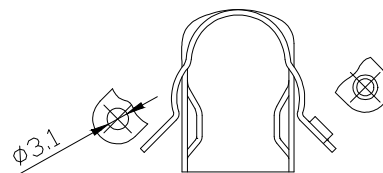

A:REVERSE TYPE



Current Rating:5A
Dielectric Withstanding Voltage:1000V for one minute
Insulation Resistance:1000MΩ Min. (at 500V DC)
Contact Resistance:25mΩ Max.
Temperature:-55° C to +105° C

Material & Finish

1. SHELL:

Steel Zinc Plated,Tin Plated or Nickel Plated Steel

2. PIN CONTACT:Phosphor Bronze or Brass Gold Plated

3. INSULATOR:

PBT & Glass-Fibre Reinforced UL 94-V0

Ordering Code:

57CC - M - X - X - X - X - 01
① ② ③ ④ ⑤ ⑥

① CONTACT TYPE:

F:FEMALE

M:MALE

② NO. OF CONTACT:

14 24 36 50

③ CONTACT PLATING:

A: GOLD FLASH

S: SELECTIVE GOLD PLATED 3U"

SA: SELECTIVE GOLD PLATED 5U"

SB: SELECTIVE GOLD PLATED 10U"

SC: SELECTIVE GOLD PLATED 15U"

SD: SELECTIVE GOLD PLATED 30U"

④ INSULATOR COLOR:

B:BLUE

K:BLACK

⑤ DIRECTION TYPE:

A:REVERSE TYPE

B:STANDARD TYPE

⑥ SERIES NUMBER:01

Unless Otherwise specified tolerance
X. ±0.35 X.XX:±0.20
X.X:±0.25 X.XXX:±0.15

SCALE:
As Shown UNIT:
mm
DRAW
Wu Feng Rong DATE
02/24/2021
CHECK
BobYang DATE
02/24/2021

3rd ANGLE PROJECTION

Antenk® ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: 2.16mm CENTRONIC LOW PROFILE MALE
SOLDER & 70500 METAL SHELL

DRAWING NO: 57CC-MXXXX01

PRODUCT NO: 57CC-MXXXX01

REV	DESCRIPTION	DATE