HSF Pb R6HS

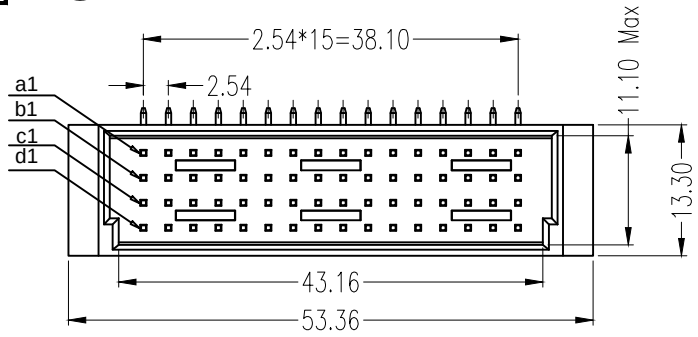

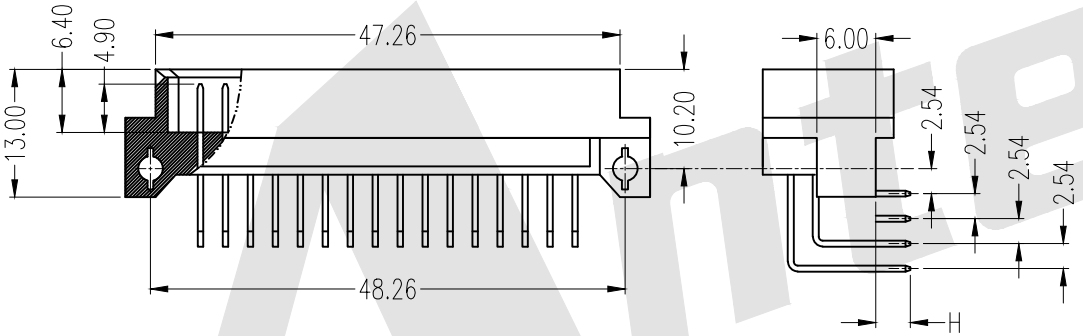

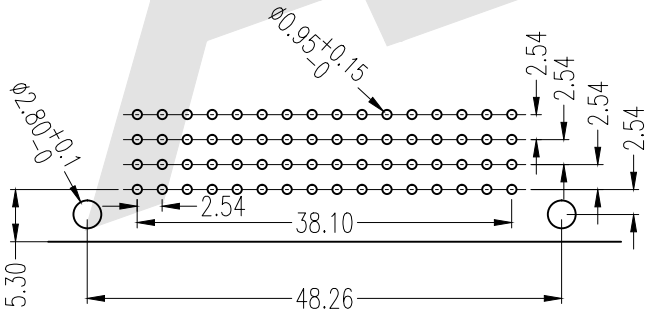

Recommended P.C.B.Layout

SPECIFICATION
Current Rating: 2.0Amp
Insulation Resistance: 1000MΩ min.at DC 500V
Contact Resistance: 20mΩ max
Withstand Voltage: AC 1000V For 1 Minute
Operating Temperature: -55°C to +105°C
Contact Material: Brass
Contact Plating: Au or Sn Over Ni
Insulator Material: PBT+30%GF UL 94V-0
Insertion Force: 128 pin max.120N
Withdrawal Force: 0.15N min.per individual contact

Ordering Code:

DMR - 64 - X - X - X - 401
① ② ③ ④ ⑤ ⑥

① Series No:

② No.of Contacts
64P,32P

③ Termination
B:Right tail length H=3.5mm

④ Rows Loaded With Contacts
J:Row a+b+c+d
K:Row a+d

⑤ Contact Plating
G0: Gold flash
S0: Gold flash/Ni
G1: 3u" Gold
S1: 3u" Gold/Ni
G2: 5u" Gold
S2: 5u" Gold/Ni
G3: 10u" Gold
S3: 10u" Gold/Ni
G4: 15u" Gold
S4: 15u" Gold/Ni
G5: 30u" Gold
S5: 30u" Gold/Ni
SN: Tin

⑥ Series number
401

REV	DESCRIPTION	DATE
		25/09/2020

Unless Otherwise specified tolerance
X.±0.35 X.XX:±0.20
X.X:±0.25 X.XXX:±0.15

SCALE: As Shown	UNIT: mm
DRAW Mo	DATE 16/12/2020
CHECK BobYang	DATE 16/121/2020

3rd ANGLE PROJECTION

ANTENK ELECTRONICS CO,.LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: DIN41612 Right Angle Plug Type C Connector 64 Positions

DRAWING NO: DMR-XX-XXX-401

PRODUCT NO: DMR-XX-XXX-401