



HSF

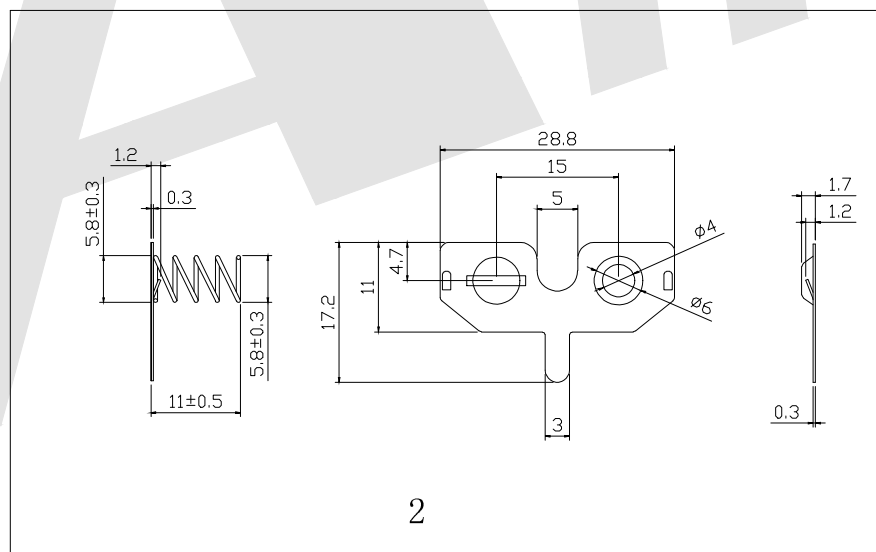

ROHS

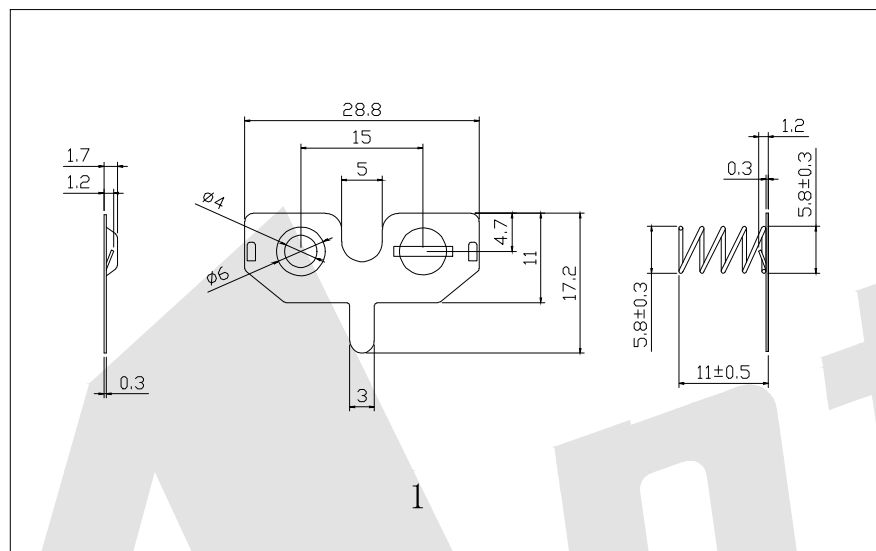

Technical requirements:

1. Materials shall meet Rosh requirements;
2. There should be no severe front on the surface (0.06);
3. Surface treatment: nickel plating, electroplating quality requirements: 2% concentration of brine, 48 hours
4. Refer to GB / t1501i5-200 - tolerance table for dimensions without tolerance indication;
5. After riveting, the spring should be upright, and the parts should not be deformed;
The riveted joint is firm and reliable with good conductivity
6. Belt specification: 0.3 (thickness) X36 (width) x15.1 (step length); Heat treatment (tempering) of cold rolled plate + carbon steel wire
- Spring;
7. The end face of the spring should be made safe, tempered and shaped $\phi 0.5\text{mm}$
8. Mark " " is the key monitoring size.

Order code:

BS - S - SN - R - 173L

① ② ③ ④ ⑤

- | | |
|---|---|
| ① BS: Battery Contacts | ④ Packing Method
A: Tray Packing
B: Bag Packing
R: Tape & Reel Packing |
| ② Apperance For The Product
S:180 TYPE | ⑤ Product Number
173L |
| ③ Contact Plating
SN: Tin
G0: Gold flash
G1: 3U" Gold
G2: 5U" Gold
G3: 10U" Gold
G4: 15U" Gold
G5: 30U" Gold | |

Unless Otherwise specified tolerance
 X. ± 0.35 X.XX: ± 0.20
 X.X: ± 0.25 X.XXX: ± 0.15

Antenk® ANTENK ELECTRONICS CO., LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail:sales@antenk.com

SCALE: As Shown	UNIT: mm
DRAW Wu Feng Rong	DATE 05/06/2021
CHECK BobYang	DATE 05/06/2021

TITLE:
5# Cell Battery Contacts(Positive And Negative) 173L



DRAWING NO: BS-S-SN-R-173L

PRODUCT NO: BS-S-SN-R-173L

REV	DESCRIPTION	DATE