

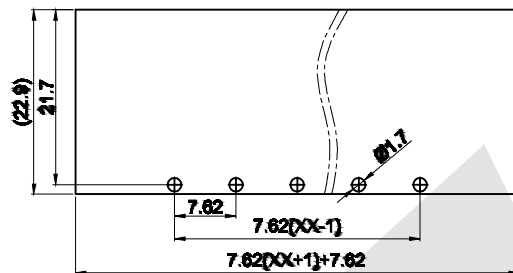



HSF

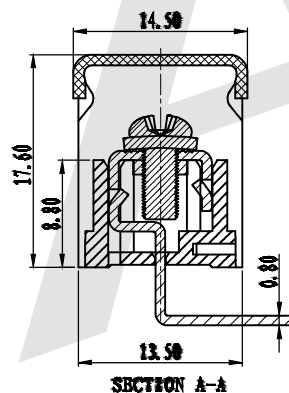

P.C.B. LAYOUT

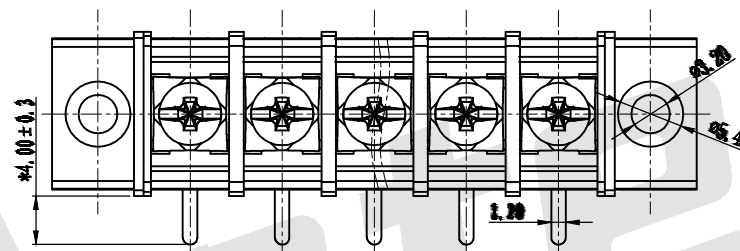

SECTION A-A

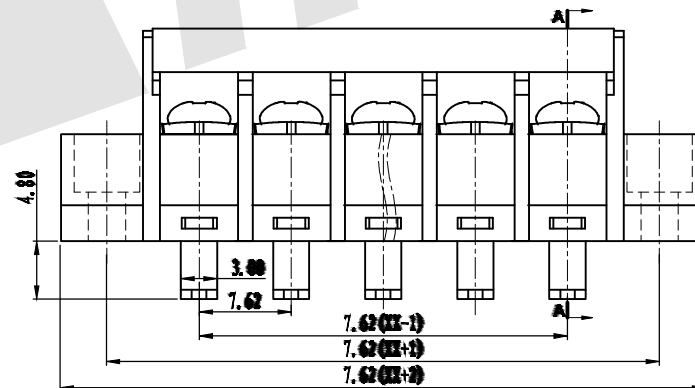

SPECIFICATION

Standard(参考标准): UL IEC
 Voltage Rating (额定电压): 300V 450V
 Current Rating (额定电流): 15A 17.5A
 Wire range (使用线径): 22-14AWG 1.5mm²
 Withstanding voltage (耐电压): AC2000V/1Min
 Insulation resistance (绝缘电阻): 500MΩ/DC500V
 Temp Rang (温度范围): -40° C ~ +105° C
 Max Torque (最大锁紧力矩): 0.5Nm(4.5lb. in)
 Housing (塑件): PA66, UL94V-0
 Screw (螺丝): Steel, M3.0 Ni-Plated
 Terminal (端子): Brass. 0.8t, Tin Plated
 Pitch (间距): 7.62mm
 Poles (极数): 2P-24P

Ordering Code:

AT828 - 7.62 - XX - X -RM

Pitch:
7.62:7.62mm

Poles:
02: 2 Contacts
03: 3 Contacts
... ..
22: 22 Contacts

Insulator color:
A:Green B:Blue
C:Black G:Gray
R:Orange T:Transparent
R:Red Y:Yellow
W:White

RM:Series number.

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
 DRAW: Wu Sai DATE: 22/03/2018
 CHECK: BobYang DATE: 22/03/2018



Antenk® ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

TITLE:
Barrier Terminal Block Pitch:7.62mm

DRAWING NO: AT828-7.62XXX-RM
 PRODUCT NO: AT828-7.62XXX-RM

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		