



HSF



RoHS

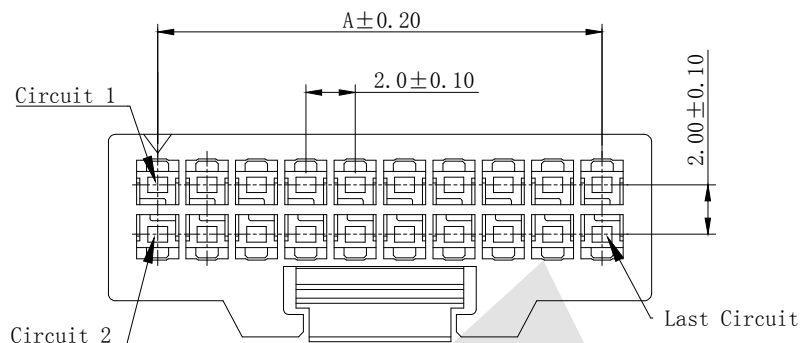

SPECIFICATIONS


- Current rating: 3A AC/DC
- Voltage rating: 250V AC/DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000M Ω min
- Contact Resistance: 10m Ω Max
- Temperature range: -40 $^{\circ}$ C~+105 $^{\circ}$ C
- Compliant with RoHS and REACH

HOUSING

- Part NO.: AH2009-2*NP
- Poles: 10-40P
- Suitable: AT2009T Series Terminal
- Mates with: AW2009 Series Wafer
- Material: Nylon 66, UL94v-0
- Color: Natural


Ordering Information & Dimensions:

Circuit	Dimensions (mm)				Circuit	Dimensions (mm)			
	A	B	C	D		A	B	C	D
2*5P	8.00	12.00	10.60	5.10	2*13P	24.00	28.00	26.60	6.80
2*6P	10.00	14.00	12.60	6.80	2*14P	26.00	30.00	28.60	6.80
2*7P	12.00	16.00	14.60	6.80	2*15P	28.00	32.00	30.60	6.80
2*8P	14.00	18.00	16.60	6.80	2*16P	30.00	34.00	32.60	6.80
2*9P	16.00	20.00	18.60	6.80	2*17P	32.00	36.00	34.60	6.80
2*10P	18.00	22.00	20.60	6.80	2*18P	34.00	38.00	36.60	6.80
2*11P	20.00	24.00	22.60	6.80	2*19P	36.00	40.00	38.60	6.80
2*12P	22.00	26.00	24.60	6.80	2*20P	38.00	42.00	40.60	6.80

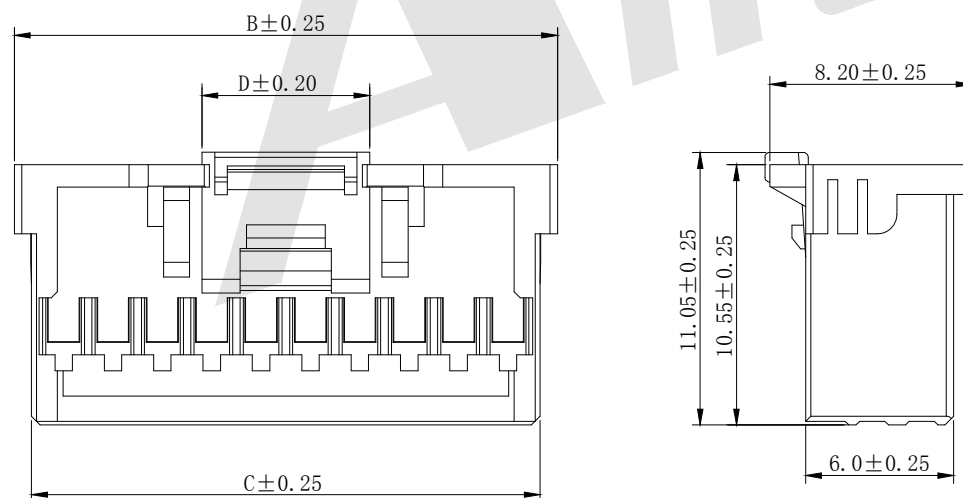

Unless Otherwise specified tolerance
X. ± 0.35 X.XX: ± 0.20
X.X: ± 0.25 X.XXX: ± 0.15

SCALE: As Shown UNIT: mm
DRAW Wu Feng Rong DATE 05/12/2021
CHECK Bob Yang DATE 05/12/2021



3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail: sales@antenk.com

TITLE:

2.00mm Pitch Housing Dual Row Connector

DRAWING NO: AH2009-2*NP

PRODUCT NO: AH2009-2*NP

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8