
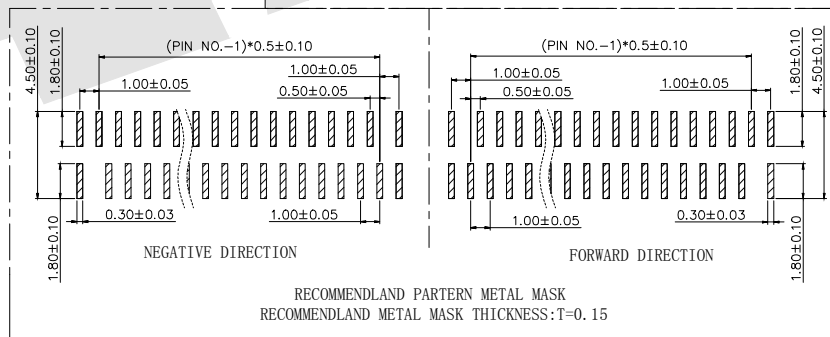
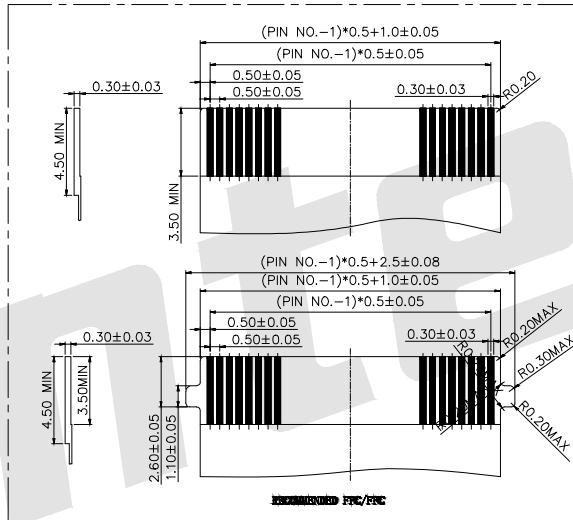

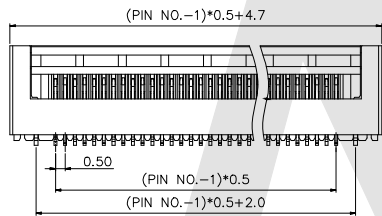


HSF

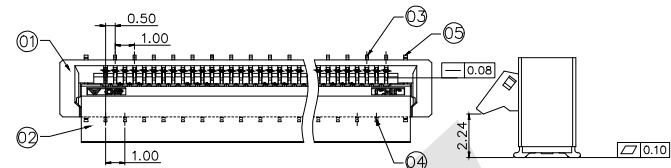

NO.	NAME	MAT.L	FINISHI
01	HOU	LCP UL94 V0	BEIGR
02	LATCH	LCP UL94 V0	BLACK
03	TERA	C5191	NI AU
04	TERB	C5191	NI AU
05	TAP	C2680	NI SN

SPECIFICATIONS

Voltage Rating:50V AC(rms)/DC
 Current Rating0.5A AC(rms)/DC
 Withstand Voltage:200V ACrms
 Working temperature:-25°C+85°C
 Insulation resistance:≥500MΩ Min
 Contact Resistance:≤0.02Ω Max(Initial)
 Temperature Range:-40°C~+105°C

Ordering Code:

FPC0.5 - XX - SM - X - X - X - 14
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① 0.5mm FPC Series
- ② Contact NO:
16 20 30 40 50 60
- ③ APPEARANCE:
SM:SMT Straight
- ④ Packing Type:
T: Tube Packing
A: Tray Packing
R: Tape & Reel
- ⑤ Plating:
G0:Gold Flash
G1:3U" Gold
SN:MATT-TIN90-120U"
S0:SELECTIVE GOLD
S1:SELECTIVE GOLD 3U"
- ⑥ Direction Type:
N:NEGATIVE DIRECTION
F:FORWARD DIRECTION
- ⑦ Series Number:
14

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
 DRAW: Wu Feng Rong DATE: 08/14/2021
 CHECK: BobYang DATE: 08/14/2021



Antenk ANTENK ELECTRONICS CO.,LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

TITLE:
 0.5mm Pitch FPC Straight SMT Flip Type

DRAWING NO: FPC0.5-XXSMXXX14

PRODUCT NO: FPC0.5-XXSMXXX14

A

A

B

B

C

C

D

D

REV DESCRIPTION

DATE

1

2

3

4

5

6

7

8