



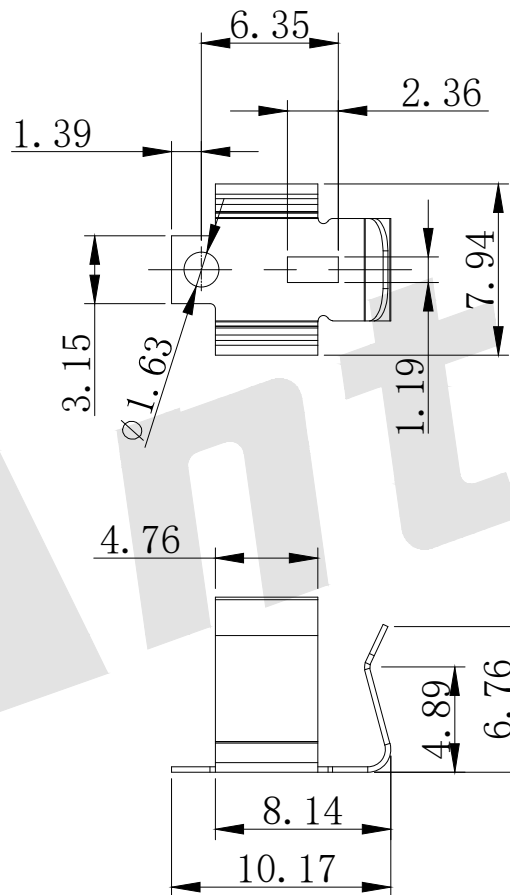

NOTES:
 1. MATERIAL: ANNEALED SPRING STEEL, T=0.25mm.
 2. PLATING:
 80U" Min TIN PLATED OVERALL
 50U" Min NICKEL PLATED UNDER OVERALL
 3. THIS PRODUCT IS SUITABLE FOR AAA BATTERY CLIP



Order code:

BS - M - XX - X - 50
 ① ② ③ ④ ⑤

- ① BS: Battery Contacts
- ② Appearance for the product
M:SMT TYPE
- ③ Contact Plating
SI:NICKEL PLATE
SN: Tin
G0: Gold flash
G1: 3u" Gold
G2: 5u" Gold
G3: 10u" Gold
G4: 15u" Gold
G5: 30u" Gold
- ④ Packing method
A: Tray packing
R: Tape & reel packing
B: Bag packing
- ⑤ Product number
50: 50 STYLE

Unless Otherwise specified tolerance
 X. ±0.50 X.XX: ±0.25
 X.X: ±0.30 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
 DRAW: TMX DATE: 23/09/2021
 CHECK: BobYang DATE: 23/09/2021



Antenk® ANTENK ELECTRONICS CO., LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail:sales@antenk.com

TITLE: Battery contact clip 50

DRAWING NO: BS-M-XX-X-50
 PRODUCT NO: BS-M-XX-X-50

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		