


HSF







SPECIFICATIONS

- Voltage rating: 200V AC, DC
- Current rating: 1A AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 100MΩ min
- Temperature range: -40°C~+105°C

WAFER

- Part NO: AW1253V-xP
- Material: Pin: Brass/Tin over Nickel
Insulator: Nylon 66, UL94V-0
- Mates with: AH1253 series Housing
- Color: Reddish brown

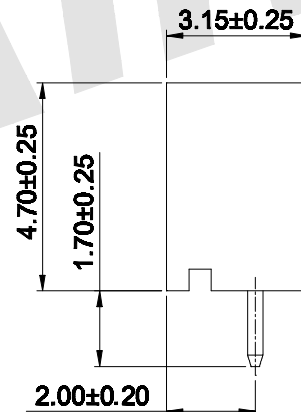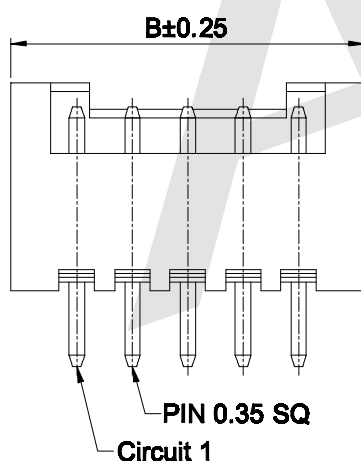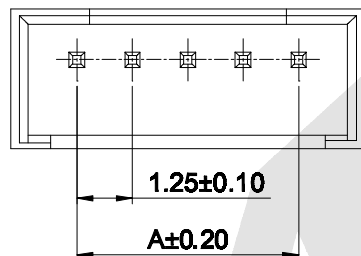

Ordering Information & Dimensions:

Poles	Part No.	Dimensions (mm)	
		A	B
02	AW1253V-02P	1.25	4.25
03	AW1253V-03P	2.50	5.50
04	AW1253V-04P	3.75	6.75
05	AW1253V-05P	5.00	8.00
06	AW1253V-06P	6.25	9.25
07	AW1253V-07P	7.50	10.50
08	AW1253V-08P	8.75	11.75
09	AW1253V-09P	10.00	13.00
10	AW1253V-10P	11.25	14.25
11	AW1253V-11P	12.50	15.50
12	AW1253V-12P	13.75	16.75
13	AW1253V-13P	15.00	18.00
14	AW1253V-14P	16.25	19.25
15	AW1253V-15P	17.50	20.50

Unit:mm

Unless Otherwise specified tolerance
 X ±0.35 X, XX: ±0.20
 X, X: ±0.25 X, XXX: ±0.15

SCALE: As Shown UNIT: mm
 DRAW: Jack Bao DATE: 11/04/2017
 CHECK: Bob Yang DATE: 11/04/2017

Antenk ANTENK ELECTRONICS CO., LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail:sales@antenk.com

TITLE: 1.25mm pitch 180° Wafer Connector Series

DRAWING NO: AW1253V-xP

PRODUCT NO: AW1253V-xP

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		

