

SPECIFICATIONS

- Voltage rating: 100V AC, DC
- Current rating: 2A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40°C~+105°C





WAFER

- Part NO: AW2010V-NP
- Material: Pin: Brass/Tin over Nickel  
Insulator: Nylon 6T, UL94V-0
- Mates with: AH2010 series Housing
- Color: White

Ordering Information & Dimensions:


Poles	Part No.	Dimensions (mm)	
		A	B
2	AW2010V-02P	2.00	6.00
3	AW2010V-03P	4.00	8.00
4	AW2010V-04P	6.00	10.00
5	AW2010V-05P	8.00	12.00
6	AW2010V-06P	10.00	14.00
7	AW2010V-07P	12.00	16.00
8	AW2010V-08P	14.00	18.00
9	AW2010V-09P	16.00	20.00
10	AW2010V-10P	18.00	22.00
11	AW2010V-11P	20.00	24.00
12	AW2010V-12P	22.00	26.00
13	AW2010V-13P	24.00	28.00
14	AW2010V-14P	26.00	30.00
15	AW2010V-15P	28.00	32.00

Unit: mm

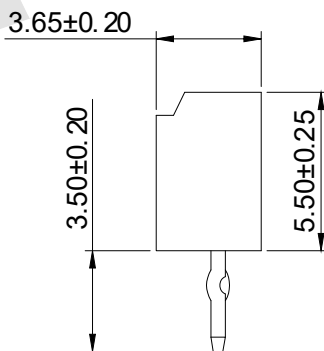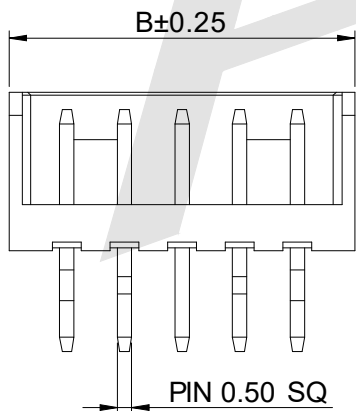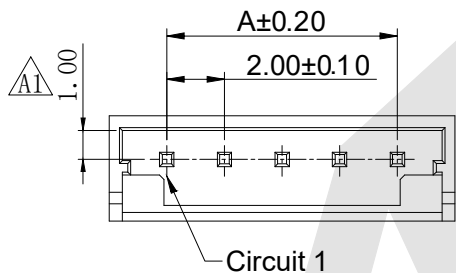

Unless Otherwise specified tolerance  
 X. ±0.35 X.XX: ±0.20  
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm  
 DRAW: Jack Bao DATE: 10/31/2017  
 CHECK: Bob Yang DATE: 10/31/2017



**Antenk**® ANTENK ELECTRONICS CO., LTD  
[Http://www.antenk.com](http://www.antenk.com)  
 E-mail: sales@antenk.com

TITLE: 2.00mm pitch 180° Connector Series

DRAWING NO: AW2010V-NP

PRODUCT NO: AW2010V-NP

REV	DESCRIPTION	DATE
A1	Add dimension	10/12/2022