

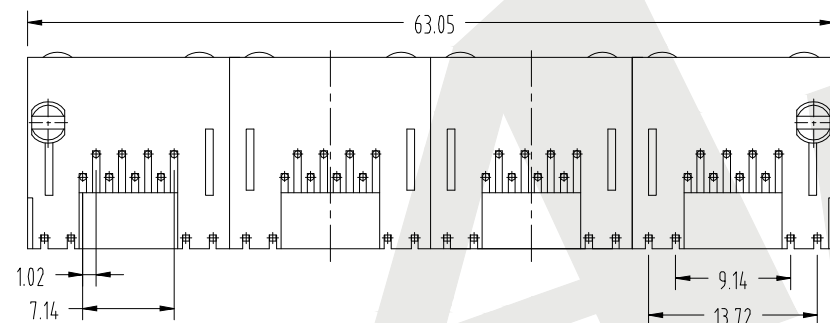


HSF

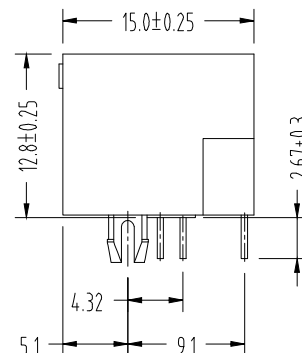

ROHS

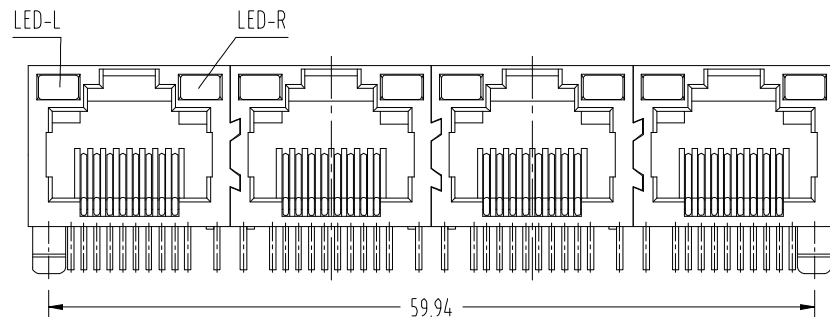

PCB LAYOUT

NOTES:

MATERIAL:

1. HOUSING MATERIAL: GLASS FILLED POYESTER UL94V-0.
2. CONTACT MATERIAL: PHOSPHOR BRONZE $t=0.3\text{mm}$
3. PLATING: SELECTING GOLD PLATING $1\mu\sim 50\mu$ OVER NICKEL IN CONTACT AREA. 150μ TIN PLATIN. OVER NICKEL IN SOLDER AREA
4. SHIELD: 0.2mm THICKNESS COPPER WITH NICKEL PLATE ELECTRICAL
1. VOLTAGE RATING: 125VAC RMS
2. CURRENT RATING: 1.5AMP
3. CONTACT RESISTANCE: 30MILLIOHMS MAX
4. INSULATION RESISTANCE 500MEGOHMS MIN @500V DC
5. DIELECTRIC WITHSTANDING RESISTANCE : 1000V AC RMS 50Hz. 1MIN

MECHANICAL

1. DURRABILITY: 750 CYCLES MIN
2. PCB RETENTION PRB-SOLDER: 1 LB MIN REVRONMENTAL
1. STORAGE: -40°C TO 85°C
2. OPERATION: 0°C TO 70°C

Order code:


ATRJ5622 - 8P - 8C - X - A - C - B

①	②	③	④	⑤	⑥	⑦
---	---	---	---	---	---	---

- | | |
|---|-----------------------------|
| ① SERIES NO: | ⑥ Ports |
| ② NUMBER OF POSITIONS (10P, 8P, 6P, 4P) | A: 1X1P G: 2X1P |
| ③ NUMBER OF CONTACTS (10C, 8C, 6C, 4C) | B: 1X2P H: 2X2P |
| ④ Contact Plating | C: 1X4P I: 2X3P |
| G0: Gold flash | D: 1X5P J: 2X4P |
| G1: 3U" Gold | E: 1X6P K: 2X6P |
| G2: 5U" Gold | F: 1X8P L: 2X8P |
| G3: 10U" Gold | |
| G4: 15U" Gold | |
| G5: 30U" Gold | |
| SN: Tin | |
| ⑤ Shield | ⑦ LED STYLE: |
| A: W/O Shield | A: W/O LED |
| B: Half Shield | B: LEFT YELLOW/RIGHT GREEN |
| C: Shield W/Eml | C: LEFT GREEN/RIGHT YELLOW |
| D: Shield W/O Eml | D: LEFT RED/RIGHT GREEN |
| | E: LEFT GREEN/RIGHT RED |
| | F: LEFT YELLOW/RIGHT YELLOW |
| | G: LEFT GREEN/RIGHT GREEN |

Unless Otherwise specified tolerance
X. ± 0.35 X. XX: ± 0.20
X. X: ± 0.25 X. XXX: ± 0.15

SCALE: As Shown	UNIT: mm
DRAW Wu Feng Rong	DATE 22/03/2018
CHECK BobYang	DATE 22/03/2018



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail: sales@antenk.com

TITLE: RJ45 Jack Side Entry, Full Plastic With LED, 1X4P

DRAWING NO: ATRJ5622-8P8C-X-A-C-B

PRODUCT NO: ATRJ5622-8P8C-X-A-C-B

REV

DESCRIPTION

DATE

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---