


PRODUCT FEATURES

- ☐ Ultrafast Reverse Recovery Time
- ☐ Soft Reverse Recovery Characteristics
- ☐ Low Reverse Recovery Loss
- ☐ Low Forward Voltage
- ☐ High Surge Current Capability
- ☐ Low Leakage Current



APPLICATIONS

- ☐ Inversion Welder
- ☐ Uninterruptible Power Supply
- ☐ Plating Power Supply
- ☐ Ultrasonic Cleaner and Welder
- ☐ Converter & Chopper
- ☐ PFC

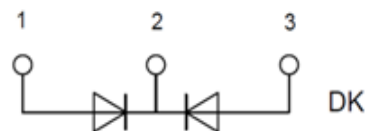

ABSOLUTE MAXIMUM RATINGS($T_C=25^{\circ}\text{C}$ unless otherwise specified)

Symbol	Parameter/Test Conditions		Values	Unit
V _R	Maximum D.C. Reverse Voltage		700	V
V _{RRM}	Maximum Repetitive Reverse Voltage			
I _{F(AV)}	Average Forward Current	T _C =90℃, Per Diode	100	A
		T _C =90℃, Per Moudle	200	
I _{F(RMS)}	RMS Forward Current	T _C =90℃, Per Diode	141	
I _{FSM}	Non Repetitive Surge Forward Current	T _J =45℃,t=10ms,Sine,peak value	1200	
		T _J =45℃,t=8.3ms,Sine,peak value	1320	
I ² t	For Fusing	T _J =45℃,t=10ms,Sine,peak value	7200	A ² S
		T _J =45℃,t=8.3ms,Sine,peak value	7230	
P _D	Power Dissipation		370	W
T _J	Junction Temperature		-40 to +150	℃
T _{STG}	Storage Temperature Range		-40 to +125	℃
V _{isol}	Isolation Breakdown Voltage	AC, 50Hz(R.M.S), t=1minute	3000	V
Torque	Module to Sink	Recommended (M5)	2.5~4	Nm
Torque	Module Electrodes	Recommended (M5)	2.5~4	Nm
R _{thJC}	Junction to Case Thermal Resistance(Per Diode)		0.34	℃ /W
Weight			100	g

ELECTRICAL CHARACTERISTICS ($T_C=25^{\circ}\text{C}$ unless otherwise specified)

Symbol	Parameter/Test Conditions	Min.	Typ.	Max.	Unit
I_{RM}	Maximum Reverse Leakage Current	$V_R = 700\text{V}$		0.5	mA
		$V_R = 700\text{V}, T_J = 125^{\circ}\text{C}$		5	
V_F	Forward Voltage	$I_F=100\text{A}$		1.2	V
		$I_F=100\text{A}, T_J=125^{\circ}\text{C}$		1.1	
t_{rr}	Reverse Recovery Time ($I_F = 1\text{A}, dI_F/dt = -200\text{A}/\mu\text{s}, V_R = 30\text{V}$)		50		ns
t_{rr}	Reverse Recovery Time	$I_F=100\text{A}, V_R=350\text{V},$		140	ns
I_{RRM}	Maximum Reverse Recovery Current	$dI_F/dt = -200\text{A}/\mu\text{s}$		14.5	A
t_{rr}	Reverse Recovery Time	$I_F=100\text{A}, V_R=350\text{V},$		275	ns
I_{RRM}	Maximum Reverse Recovery Current	$dI_F/dt = -200\text{A}/\mu\text{s}, T_J=125^{\circ}\text{C}$		28	A

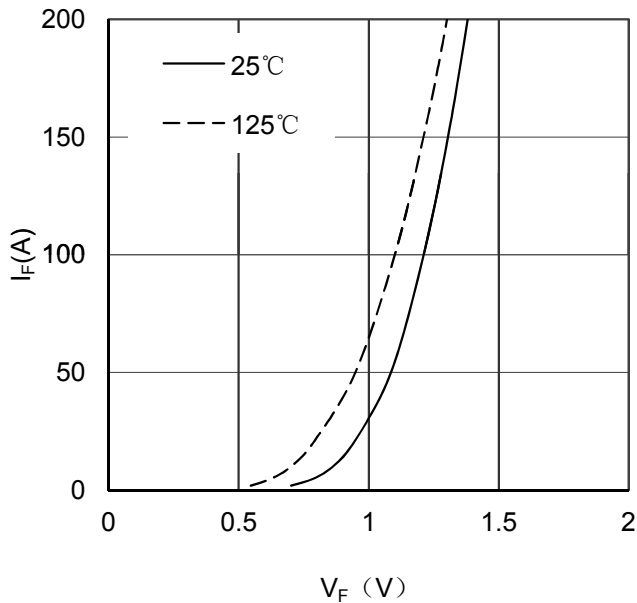


Figure 1. Forward Voltage Drop vs Forward Current

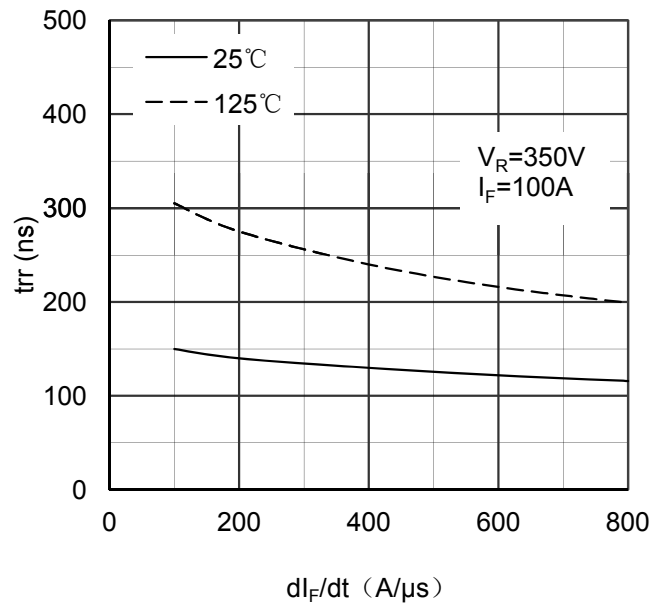


Figure 2. Reverse Recovery Time vs dI_F/dt

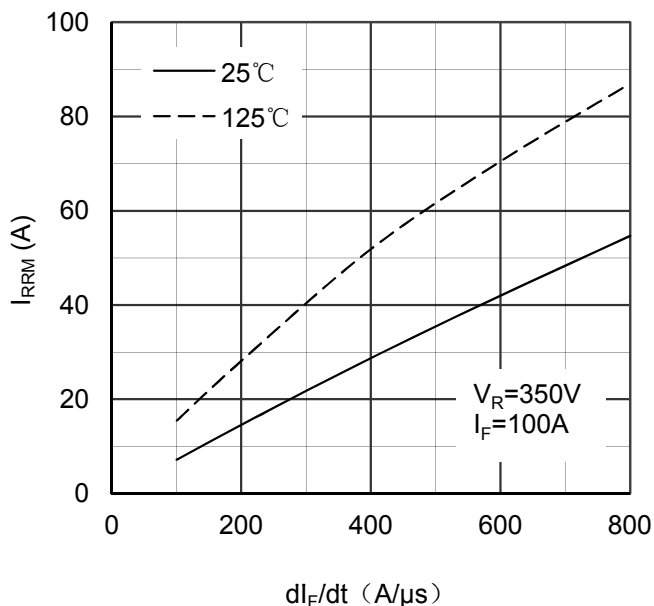


Figure 3. Reverse Recovery Current vs dI_F/dt

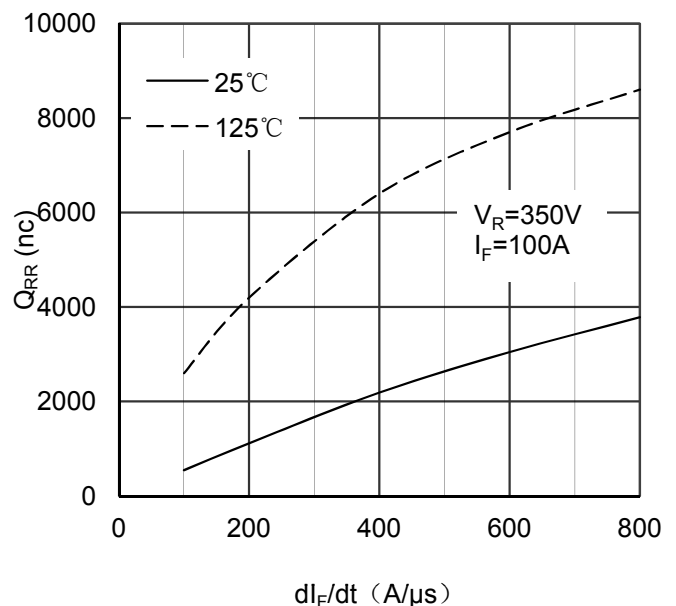


Figure 4. Reverse Recovery Charge vs dI_F/dt

PST- F200N070DK

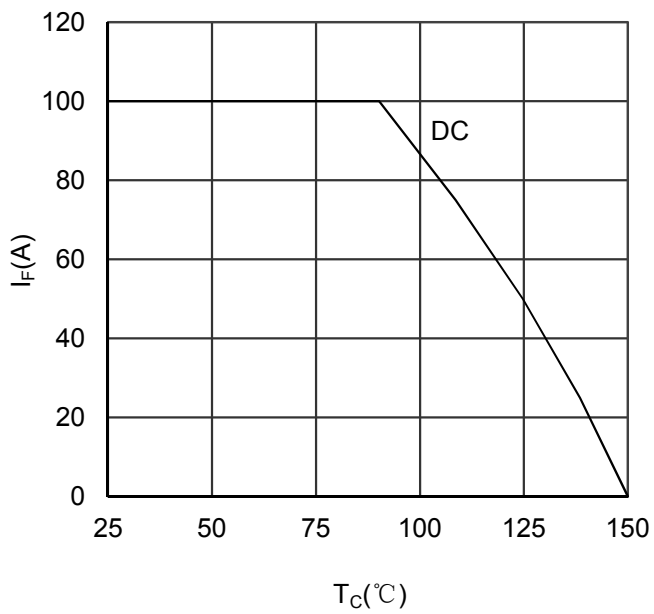


Figure 5. Forward current vs Case temperature


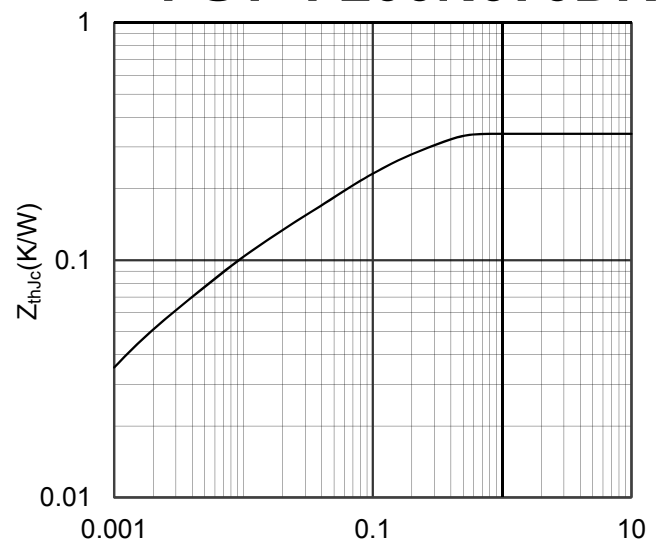


Figure 6. Transient Thermal Impedance



Dimensions in (mm)
Figure 7. Package Outline

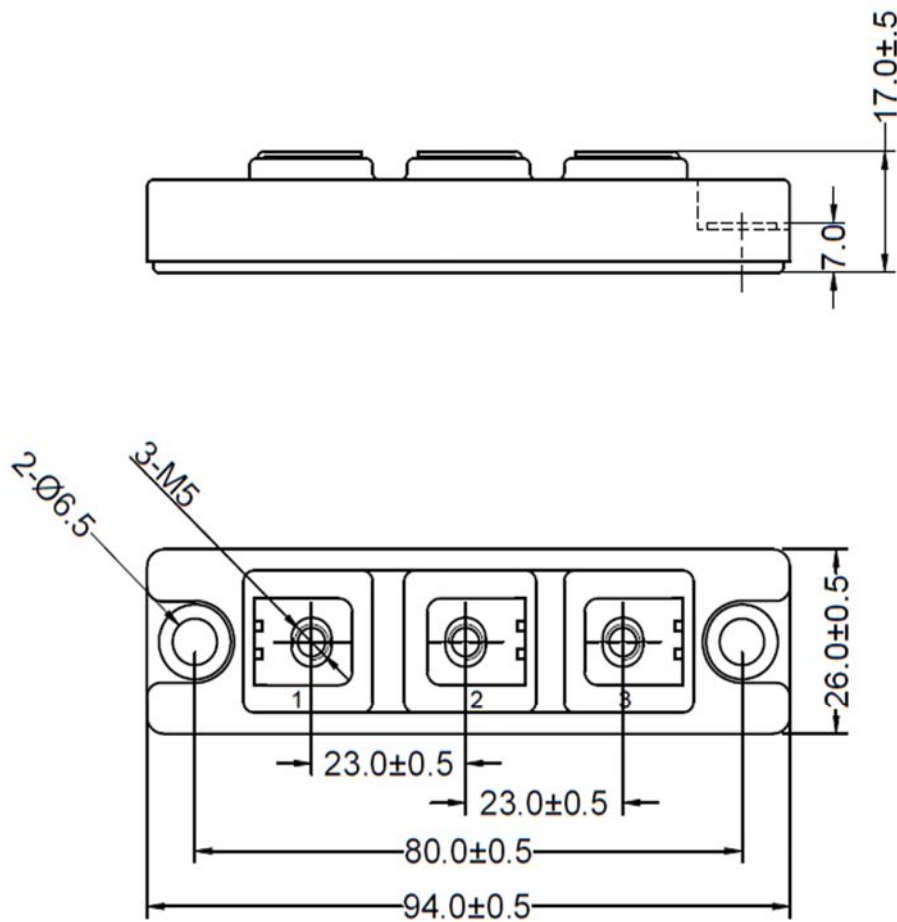

Tel: +86-514-87782298, 87782296

E-mail: positioning@china.com;

Web Site: www.Pst888.com

FAX: +86-514-87782297, 87367519

info@yzpst.com;

www.yzpstcc.com

yzpst@pst888.com

www.yzpst.net

www.yzpst.com