


## 2P6M 2A Sensitive SCRs

### DESCRIPTION:

The 2P6M 2A SCR series provide high dv/dt rate with strong resistance to electromagnetic interface. They are especially recommended for use on residual current circuit breaker, straight hair, igniter etc.

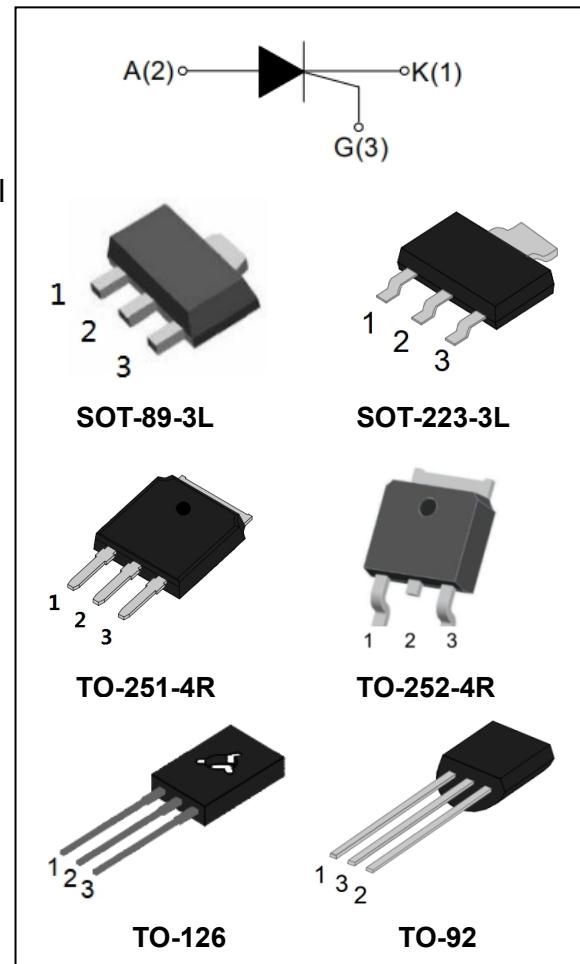

### MAIN FEATURES:

symbol	value	unit
$I_{T(RMS)}$	2.0	A
$I_{GT}$	$\leq 200$	$\mu A$
$V_{DRM}/V_{RRM}$	600	V

### ABSOLUTE MAXIMUM RATINGS:

Parameter	Symbol	Value	Unit
Storage junction temperature range	$T_{stg}$	-40~150	°C
Operating junction temperature range	$T_j$	-40~110	°C
Repetitive peak off-state voltage ( $T_j=25^\circ C$ )	$V_{DRM}$	600	V
Repetitive peak reverse voltage ( $T_j=25^\circ C$ )	$V_{RRM}$	600	V
RMS on-state current	$I_{T(RMS)}$	2	A
Non repetitive surge peak on-state current (full cycle, $F=50Hz$ )	$I_{TSM}$	20	A
$I^2t$ value for fusing ( $t_p=10ms$ )	$I^2t$	2	$A^2s$
Critical rate of rise of on-state current ( $I_G=2\times I_{GT}$ )	$dI/dt$	50	$A/\mu s$

**2P6M 2A Sensitive SCRs**

Peak gate current	I <sub>GM</sub>	0.2	A
Average gate power dissipation	P <sub>G(AV)</sub>	0.1	W
Peak gate power	P <sub>GM</sub>	0.5	W

**ELECTRICAL CHARACTERISTICS (T<sub>j</sub>=25°C unless otherwise specified)**


Symbol	Test Condition	Value			Unit
		MIN	TYPE	MAX	
I <sub>GT</sub>	V <sub>D</sub> =12V, R <sub>L</sub> =33Ω	-	50	200	μA
V <sub>GT</sub>		-	0.6	0.8	V
V <sub>GD</sub>	V <sub>D</sub> =V <sub>DRM</sub> T <sub>j</sub> =110°C	0.2	-	-	V
I <sub>H</sub>	I <sub>T</sub> =50mA	-	-	5	mA
I <sub>L</sub>	I <sub>G</sub> =1.2I <sub>GT</sub>	-	-	6	mA
dV/dt	V <sub>D</sub> =2/3×V <sub>DRM</sub> T <sub>j</sub> =110°C R <sub>GK</sub> =1KΩ	20	-	-	V/μs

**STATIC CHARACTERISTICS**


Symbol	Test Condition			Value	Unit
V <sub>TM</sub>	I <sub>TM</sub> =4A t <sub>p</sub> =380μs	T <sub>j</sub> =25°C	MAX	1.5	V
I <sub>DRM</sub>	V <sub>D</sub> =V <sub>DRM</sub> = V <sub>RRM</sub> R <sub>GK</sub> =1KΩ	T <sub>j</sub> =25°C	MAX	5	μA
I <sub>RRM</sub>		T <sub>j</sub> =110°C		0.1	mA

**THERMAL RESISTANCES**


Symbol	Test Condition		Value	Unit
R <sub>th(j-c)</sub>	junction to case(AC)	TO-251-4R/TO-252-4R	6.5	°C/W
		TO-92	10	
		TO-126	7.0	
		SOT-89-3L	8.3	
		SOT-223-3L	7.3	

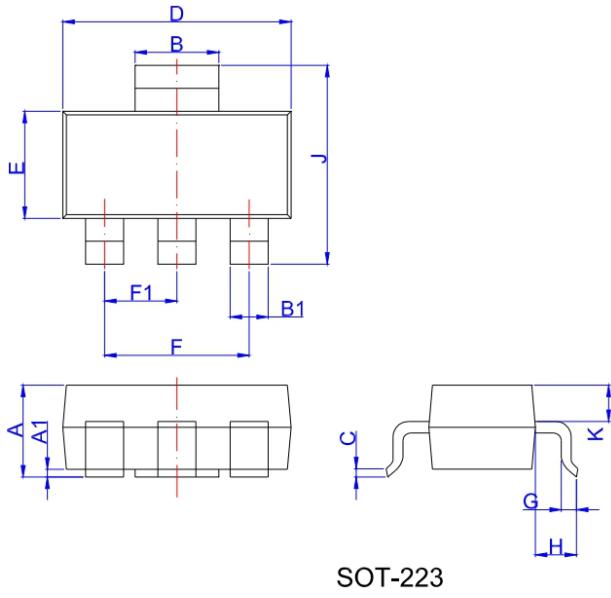**2P6M 2A Sensitive SCRs****PACKAGE MECHANICAL DATA**

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	1.5	1.6	1.8	0.059	0.063	0.071
A1	0.01	0.06	0.10	0.001	0.002	0.004
B	2.9	3.0	3.1	0.114	0.118	0.122
B1	0.6	0.7	0.8	0.024	0.028	0.031
C	0.22	0.25	0.32	0.009	0.010	0.013
D	6.3	6.5	6.7	0.248	0.256	0.264
E	3.3	3.5	3.7	0.130	0.138	0.146
F		4.6	6.8	0.252	0.181	
F1		2.3			0.091	
G	0.7	0.9	1.1	0.028	0.035	0.043
H	1.5	1.75	2.0	0.059	0.069	0.079
J	6.7	7.0	7.3	0.264	0.276	0.287
K	0.8	0.9	1.0	0.031	0.035	0.039

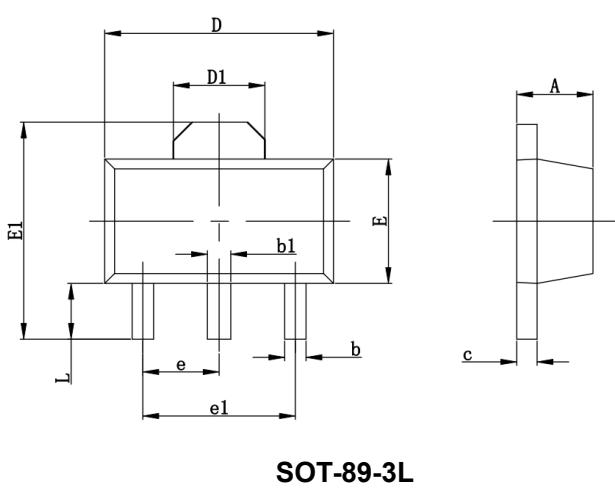


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	1.4			0.055		0.063
b	0.35			0.013		0.197
b1	0.4			0.016		0.023
c	0.35			0.014		0.017
D	4.4			0.173		0.181
D1		1.55			0.061	
E	2.35			0.091		0.102
E1	3.94			0.155		0.167
e		1.500			0.060	
e1		3.000			0.118	
L	0.9			0.035		0.047

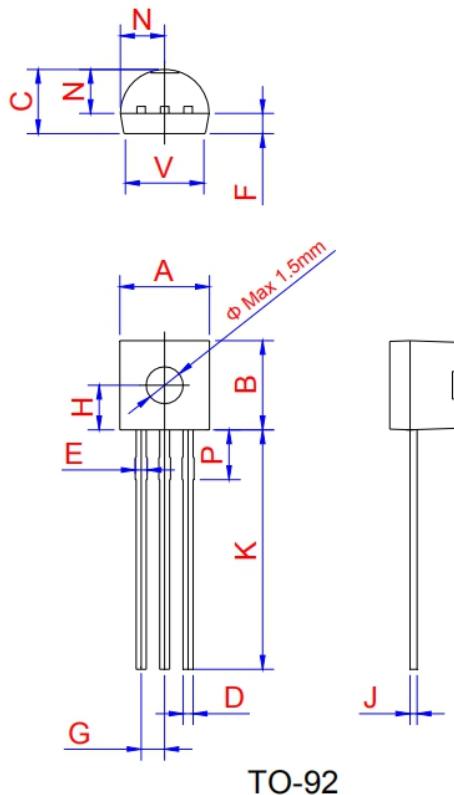**2P6M 2A Sensitive SCRs**


TO-92

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.45	4.6	5.2	0.175	0.181	0.205
B	4.32	4.6	5.33	0.17	0.181	0.21
C	3.18	3.55	4.19	0.125	0.14	0.165
D	0.407		0.533	0.016		0.021
E	0.6		0.8	0.024	0	0.031
F	-	1.1	-	-	0.043	-
G	-	1.27	-	-	0.05	-
H	-	2.3	-	-	0.091	-
J	0.36	0.38	0.5	0.014	0.015	0.02
K	12.7		15	0.5		0.591
N	2.04	2.3	2.66	0.08	0.091	0.105
P	1.86		2.06	0.073		0.081
V	-		4.3	-		0.169

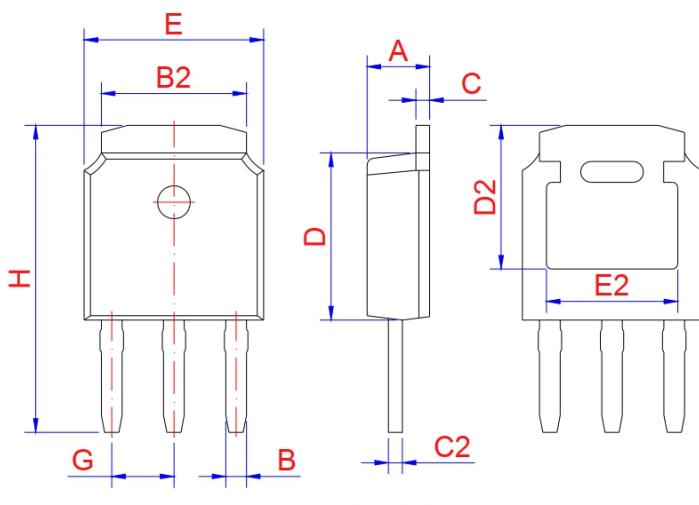


TO-251-4R

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	2.10	2.30	2.50	0.083	0.091	0.098
B	0.66	0.76	0.86	0.026	0.030	0.034
B2	5.15	5.33	5.48	0.203	0.210	0.216
C	0.44	0.51	0.58	0.017	0.020	0.023
C2	0.44	0.51	0.58	0.017	0.020	0.023
D	5.90	6.10	6.30	0.232	0.240	0.248
D2	5.30REF			0.209REF		
E	6.40	6.60	6.80	0.252	0.260	0.268
E2	4.83REF			0.190REF		
G	2.19	2.29	2.39	0.086	0.090	0.094
H	10.60	11.20	11.80	0.417	0.441	0.465

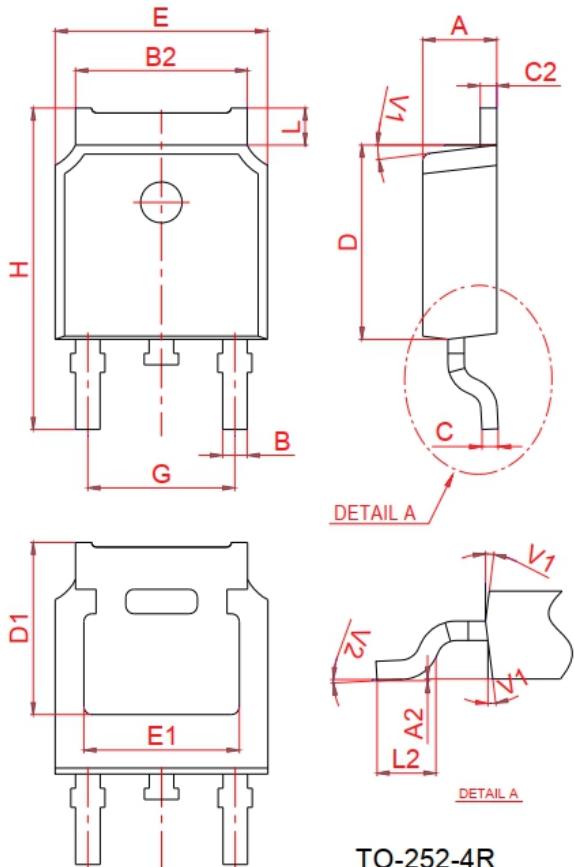**2P6M 2A Sensitive SCRs**

TO-252-4R


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	2.2		2.4	0.087		0.094
A2	0		0.1	0		0.004
B	0.66		0.86	0.026		0.034
B2	5.1		5.46	0.201		0.215
C	0.46		0.58	0.018		0.023
C2	0.44		0.58	0.017		0.023
D	5.9		6.3	0.232		0.248
D1	5.30REF			0.211REF		
E	6.4		6.8	0.252		0.268
E1	4.63			0.182		
G	4.372		4.772	0.172		0.188
H	9.8		10.4	0.386		0.409
L	1.09		1.21	0.043		0.048
L2	1.35		1.65	0.053		0.065
V1		7°			7°	
V2	0°		6°	0°		6°

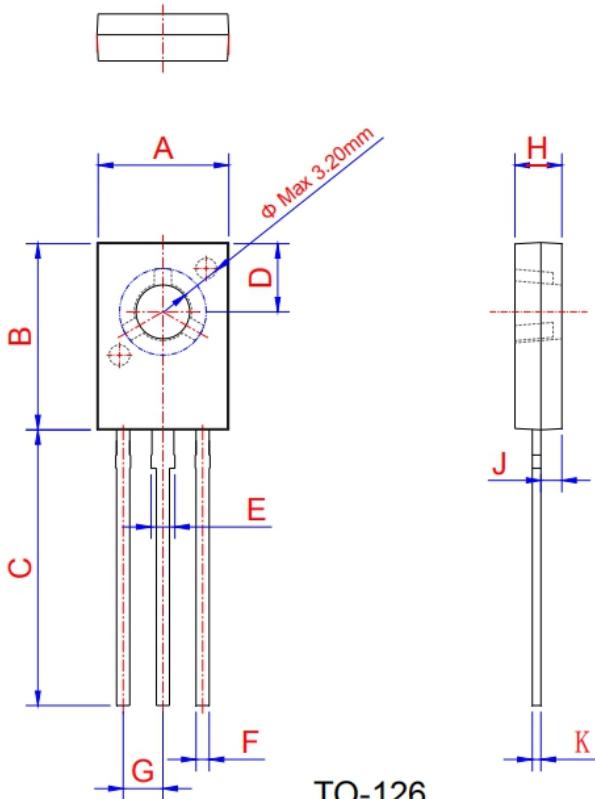


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	7.4		7.8	0.291		0.307
B	10.6		11.2	0.417		0.441
C	15.3		16.3	0.602		0.642
D	3.9		4.1	0.154		0.161
E	1.17		1.47	0.046		0.058
F	0.66		0.86	0.026		0.034
G		2.29			0.09	
H	2.5		2.9	0.098		0.114
K	0.45		0.6	0.018		0.024

## 2P6M 2A Sensitive SCRs


**FIG.1:** Maximum power dissipation versus RMS on-state current

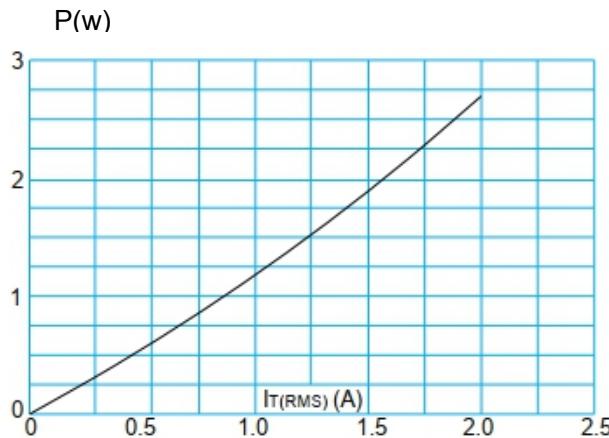


**FIG.3:** Surge peak on-state current versus number of cycles

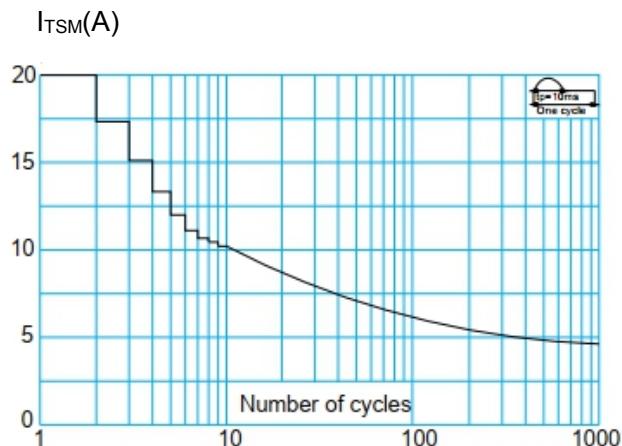


**FIG.5:** Non-repetitive surge peak on-state current for a sinusoidal pulse with width  $t_p < 20\text{ms}$ , and corresponding value of  $I^2 t$  ( $dI/dt < 50\text{A}/\mu\text{s}$ )

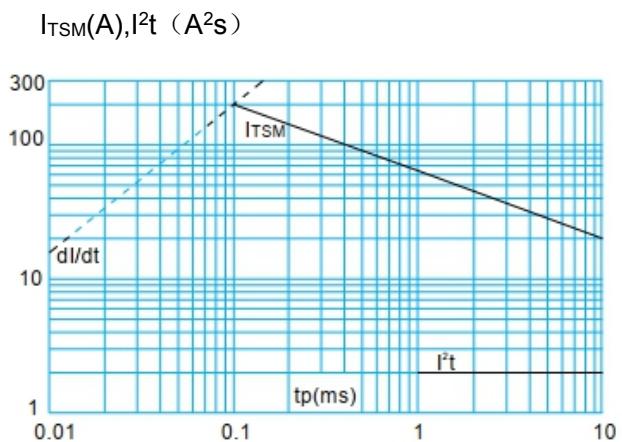

**FIG.2:** RMS on-state current versus case temperature

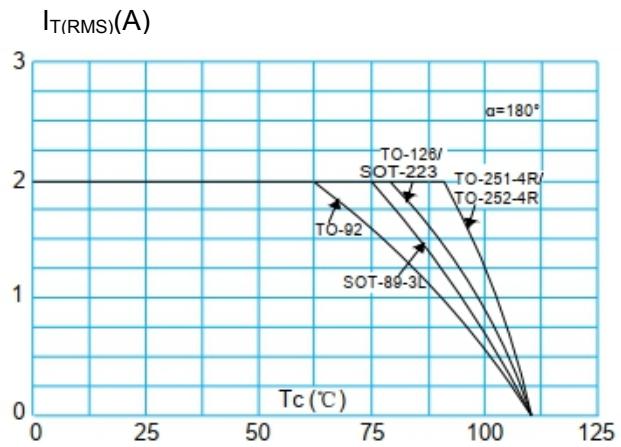

**FIG.4:** On-state characteristics (maximum values)

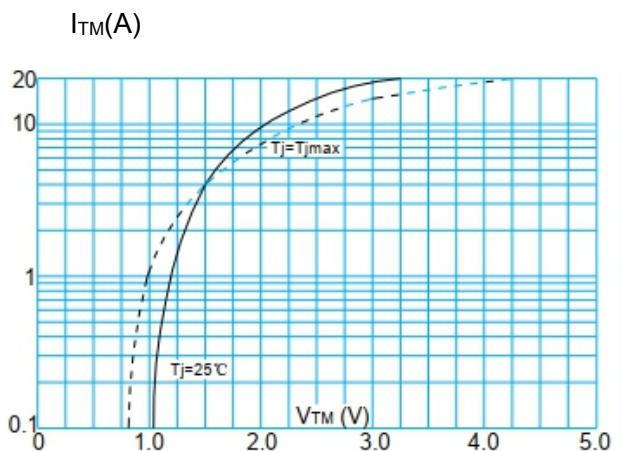

**FIG.6:** Relative variations of gate trigger current, holding current and latching current versus junction temperature

$$I_{GT}, I_H, I_L(T_j)/I_{GT}, I_H, I_L(T_j=25^\circ\text{C})$$

