



X7 LINK MANUAL LIGHT TOWER



ZERO
emission



ZERO
noise



ZERO
fuel consumption



ZERO
maintenance

LIGHTING WHERE YOU NEED
POWER WHEN YOU NEED

► Manual Light Tower

GRANDWATT X7 LINK Light Tower, a mobile light tower which can be powered by an external power source like a power generator, the main or another light tower with built-in generator, it also can be powered by its built-in lithium battery, battery is optional. The main feature of the X7 Link light tower, up to 8 Link towers can be connected in series to a single power source, providing a high illumination area with reduced fuel consumption. For the model with lithium battery, it can light above 5 hours with zero CO₂ emissions and zero noise, zero fuel consumption, zero maintenance.





GRANDWATT

HIGHLIGHT FEATURES



4*160W LED
96,000 Lumens



6.87 meters
Maximum height
Hot galvanizing



Optional lithium
battery



90° for 2 light
mounting tubes
and 360° for
each light



Manual
Lifting system




220V - 32A - IP67
inlet plug / outlet
socket



4 extendable
stabilizing legs

LINKABLE IN SERIES

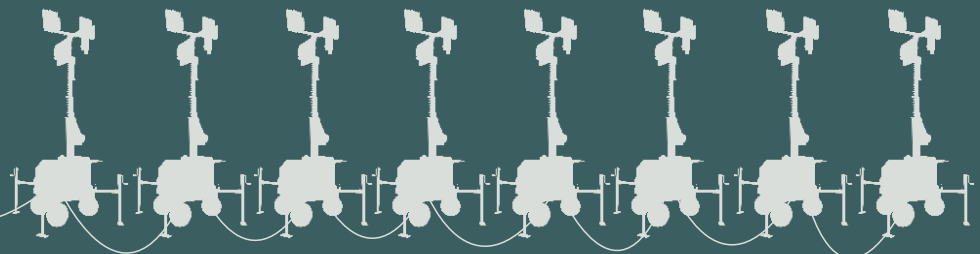

The main feature of the X7 Link light tower, up to 8 Link towers can be connected in series to a single power source, providing a high illumination area with reduced fuel consumption.

X7 LINK LIGHT TOWER



	Standard Model	XLT7-R1200	XLT7-P1200	
Dimensions	Length	1,320mm (4'4")		
	Width	1,220mm (4')		
	Height	2,680mm (8'9½")		
	Height extended fully	6.87m (22'6½")		
	Gross weight	285 kg (625 lb)	340 kg (745 lb)	
Loading Dimensions	Length for loading	1,200mm (3'11¼")		
	Width for loading	950mm (3'1½")		
	Height for loading	2,254mm (7'4¾ ")		
Electric configuration	Light	4*300W LED		
	Luminous flux	180,000 Lumen		
	Battery	Not supply	24V/300Ah lithium	
	Lighting lasting time powered by battery	Not available	≥ 5hours	
	DC/AC invertor	Not supply	24VDC/230V or 120VAC	
	Battery charger	Not supply	230V or 120VAC/24VDC	
	Battery/Plugin switch	Not supply	Included	
	Receptacles	1 for plugin & 2 for power port	230V or 120VAC/24VDC	
	Circle breakers	2*1pole for lights turn-on or turn off & 2*1 pole for power port		
	Battery/Plugin switch	Not supply	Included	
Mast	Mast sections	5		
	Mast extension	2,500 lb winch		
	Lighting rotation	90° for 2 light mounting tubes and 360° for each light		
	Light tilt	180° manual		
Cart	Stabilizing legs	4 jacks		
	Forklift slots	4 sides forklift slots with a hitch hole		
	Wheels	2*400mm front wheels with a rear rotatable dual 350mm wheels		
	Max. against wind	20m/s (45 mph)		
	Max towing speed	100km/h (62 mph)		
	Max. load in 40' container	24		